


8794-02 - 8794-03

RATCHET HEAD

22 Z

- > For accessing bolts in cramped and hard-to-reach locations, easy to change
- > Forged
- > Chrome-vanadium steel, matt chrome-plated
- > With eject-pin for unlocking

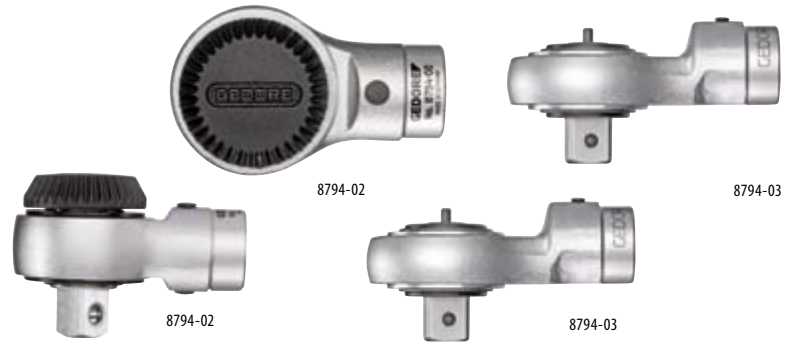

| ■" | ■ | ∅ | Type | Depth gauge | Continuous load | ⚖️ | Code | No. |
|-----|----|----|------|-------------|-----------------|-------|---------|---------|
| 3/4 | 20 | 22 | ●□ | 56 | 3/4" = 850 N-m | 1.011 | 2961385 | 8794-02 |
| 3/4 | 20 | 22 | ●□ | 56 | 3/4" = 850 N-m | 0.950 | 1427318 | 8794-03 |

End fittings 28 Z

8798

OPEN END FITTING

28 Z

- > For accessing bolts in cramped and hard-to-reach locations, easy to change
- > Chrome-vanadium steel, matt chrome-plated
- > With catch retention
- > Special sizes available on request



| ∅ mm | ∅ | mm ² ↔ | ∅ mm | Depth gauge | ⚖️ | Code | No. |
|------|----|-------------------|-------|-------------|-----|---------|---------|
| 36 | 28 | 18.0 | 77.5 | 75 | 1.9 | 1565346 | 8798-36 |
| 41 | 28 | 19.5 | 89.0 | 75 | 1.9 | 1565354 | 8798-41 |
| 46 | 28 | 20.0 | 99.0 | 75 | 1.9 | 1565362 | 8798-46 |
| 50 | 28 | 21.5 | 108.0 | 75 | 1.9 | 1565370 | 8798-50 |
| 55 | 28 | 24.5 | 118.5 | 75 | 2.1 | 1565389 | 8798-55 |
| 60 | 28 | 24.5 | 129.5 | 75 | 2.1 | 1565397 | 8798-60 |
| 65 | 28 | 28.0 | 140.5 | 75 | 2.4 | 1565400 | 8798-65 |
| 70 | 28 | 30.0 | 151.0 | 75 | 2.9 | 1565419 | 8798-70 |
| 75 | 28 | 31.5 | 163.0 | 100 | 4.0 | 1565427 | 8798-75 |

8799

RING END FITTING

28 Z

- > For accessing bolts in cramped and hard-to-reach locations, easy to change
- > Chrome-vanadium steel, matt chrome-plated
- > With catch retention
- > Special sizes available on request



| ∅ mm | ∅ | mm ² ↔ | ∅ mm | Depth gauge | ⚖️ | Code | No. |
|------|----|-------------------|------|-------------|-----|---------|---------|
| 36 | 28 | 19.5 | 60 | 75 | 1.6 | 1565494 | 8799-36 |
| 41 | 28 | 20.5 | 66 | 75 | 1.8 | 1565508 | 8799-41 |
| 46 | 28 | 22.5 | 75 | 75 | 2.1 | 1565516 | 8799-46 |
| 50 | 28 | 23.5 | 80 | 75 | 2.2 | 1565524 | 8799-50 |
| 55 | 28 | 25.0 | 88 | 75 | 2.4 | 1565532 | 8799-55 |
| 60 | 28 | 26.0 | 94 | 75 | 2.5 | 1565540 | 8799-60 |
| 65 | 28 | 29.0 | 101 | 75 | 2.9 | 1565559 | 8799-65 |
| 70 | 28 | 32.5 | 110 | 75 | 2.0 | 1565567 | 8799-70 |
| 75 | 28 | 34.0 | 117 | 100 | 4.5 | 1565575 | 8799-75 |
| 80 | 28 | 35.0 | 123 | 100 | 4.8 | 1565583 | 8799-80 |

8794

RATCHET HEAD

28 Z

- > For accessing bolts in cramped and hard-to-reach locations, easy to change
- > Chrome-vanadium steel, matt chrome-plated
- > With catch retention
- > Max. continuous load of coupler according to DIN EN ISO 6789:2003 and/or maximum support load: 1000 N-m



| ■" | ■ | ∅ | Type | Depth gauge | ⚖️ | Code | No. |
|-----|----|----|------|-------------|-----|---------|---------|
| 3/4 | 20 | 28 | ●□ | 75 | 1.8 | 1566032 | 8794-05 |