1/4"

6,3

1/4"

Ratchets 6.3 (1/4")

2093 U-20 REVERSIBLE RATCHET 1/4"

- > Used throughout industry and the automotive world and as well in confined spaces
- > Acc. to DIN 3122, ISO 3315
- > Small, drop shaped head for confined areas
- > Fine-toothed, with lever change and push-button release
- > Return angle 9 degrees
- Non-slip 2-component handle with hanging hole
- For hand-operated sockets and accessories with square drive as per DIN 3120 - C 6.3, ISO 1174, ball locking device
- > GEDORE vanadium steel 31CrV3, chrome-plated



 Particularly for the demanding use experienced in industry and with utility vehicles

2093 U-10

- > Acc. to DIN 3122, ISO 3315
- > With recessed lever change, locks in middle position
- > Return angle 15 degrees
- Non-slip 2-component handle with hanging hole
- For hand-operated sockets and accessories with square drive as per DIN 3120 - C 6.3, ISO 1174, ball locking device
- GEDORE vanadium steel 31CrV3, chrome-plated







REVERSIBLE RATCHET 1/4"



■"		€°	l⊲ mm ►l	mm⊄	∆ kg ∆	Code	No.
1/4	6.3	9	127	20	0.095	1703749	2093 U-20

"		4°	l⊲ mm ►l	mmQ ²	$\Delta_{kg}\Delta$	Code	No.
1/4	6.3	15	129	21.5	0.109	6180470	2093 U-10

2093 U-3 REVERSIBLE RATCHET 1/4"

- > Especially for working in confined spaces, as in the automotive business
- > Acc. to DIN 3122, ISO 3315
- > With non-slip metal disc change, fine-toothed (72 teeth) and robust
- > Return angle 5 degrees
- Non-slip 2-component handle with hanging hole
- For hand-operated sockets and accessories with square drive as per DIN 3120 - C 6.3, ISO 1174, ball locking device
- GEDORE vanadium steel 31CrV3, chrome-plated

2093 Z-94

RATCHET HANDLE WITH COUPLER 1/4"

- > Used throughout industry and the automotive world
- > Acc. to DIN 3122, ISO 3315
- With square coupler, medium-fine toothed, extremely rugged
- > Return angle 18 degrees
- For hand-operated sockets and accessories with square drive as per DIN 3120 - C 6.3, ISO 1174 ball locking device
- GEDORE vanadium steel 31CrV3, chrome-plated



|∢ mm ⊳|

129



Code	No.	
6170500	2003 II-3	_





6,3

"		<i></i> °	∢ mm ►	mmQ2	$\Delta_{kg}^{\dagger}\Delta$	Code	No.	
1/4	6.3	18	129	12	0.076	6170750	2093 Z-94	

2093 U-3 T

RATCHET WITH T-HANDLE 1/4"

0.095

- > For progressing fast in confined spaces
- > Two-wing T-handle
- > Return angle 5 degrees
- > Ergonomic design for comfortable working
- For hand-operated sockets and accessories with square drive as per DIN 3120 - C 6.3, ISO 1174, ball locking device
- > The danger of the tool canting, when carrying out work with extensions, is reduced by the central positioning of the square drive

2093 HR-94HAND RATCHET 1/4"

without handle

- > With square coupler
- > Return angle 18 degrees
- > Facilitates working quickly in confined spaces where other ratchets or tools do not fit
- Especially suitable for servicing work in conjunction with extension 2090-12
- > Dimensions: Ø 26 x 20 mm



"		<i>_</i> °	∢ mm ►	$\Delta_{kg}^{\dagger}\Delta$	Code	No.					
1/4	6.3	5	140	0.065	1791532	2093 U-3 T					



"		<i>L</i> .°	$\Delta_{kg}^{+}\Delta$	Code	No.	
1/4	6.3	18	0.035	6069870	2093 HR-94	


Ratchets 10 (3/8")

3093 U-20 REVERSIBLE RATCHET 3/8"

- > Used throughout industry and the automotive world and as well in confined spaces
- > Acc. to DIN 3122, ISO 3315
- > Small, drop shaped head for confined areas
- > Fine-toothed (60 teeth), with lever change and push-button release
- > Return angle 6 degrees
- > Non-slip 2-component handle with hanging hole
- > For hand-operated sockets and accessories with square drive as per DIN 3120 - C 10, ISO 1174, ball locking device
- > GEDORE vanadium steel 31CrV3, chrome-plated

3093 U-10 REVERSIBLE RATCHET 3/8"

- > Particularly for the demanding use experienced in industry and with utility vehicles
- > Acc. to DIN 3122, ISO 3315
- > With recessed lever change
- > Locks in the middle position: When the lever is flipped, it automatically engages for clockwise or counterclockwise operation
- > Push-button release
- > Return angle 11.25 degrees
- > Non-slip 2-component handle with hanging hole
- > For hand-operated sockets and accessories with square drive as per DIN 3120 - C 10, ISO 1174, ball locking device
- > GEDORE vanadium steel 31CrV3, chrome-plated

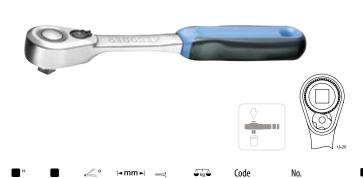

0.292

1556800

3093 U-20



3093 ALU-10 **ALUMINIUM REVERSIBLE** RATCHET 3/8"

200

29 7

- > Very lightweight, especially for work done above your head
- > Design spec. similar to DIN 3122, ISO 3315
- > Made from special-purpose drop-forged and hardened aluminium
- > The mechanism as in all U-10 ratchets is made from high quality steel
- > With recessed lever change
- > Locks in the middle position: When the lever is flipped, it automatically engages for clockwise or counterclockwise operation
- > Push-button release
- > Return angle 11.25 degrees
- > Non-slip 2-component handle with hanging hole
- > For hand-operated sockets and accessories with square drive a s per DIN 3120 - C 10, ISO 1174, ball locking device
- > Extremely lightweight just 160 g

3093 U-3 REVERSIBI F RATCHET 3/8"

- > Especially for working in confined spaces, as in the automotive business
- > Acc. to DIN 3122, ISO 3315
- > With non-slip metal disc change, fine-toothed (72 teeth) and robust
- > Return angle 5 degrees
- > Non-slip 2-component handle with hanging hole
- > For hand-operated sockets and accessories with square drive as per DIN 3120 - C 10, ISO 1174, ball locking device
- > GEDORE vanadium steel 31CrV3, chrome-plated









"		L°	∢ mm ►	mmÇ [*]	$\Delta_{kg}^{\dagger}\Delta$	Code	No.
3/8	10	11,25	200	30.2	0.160	1900005	3093 ALU-10

•		4°	l∢mm ►l	mmQ.	$\Delta_{kg}\Delta$	Code	No.
3/8	10	5	200	33.5	0.244	6237090	3093 U-3

Ratchets 12.5 (1/2")

1993 U-20 G REVERSIBLE RATCHET 1/2"

with offset handle

- > Used throughout industry and the automotive world - and as well in confined spaces
- > Torque acc. to DIN 3122, ISO 3315
- > Handle offset for barely accessible places
- > Reduces the risk of injury to the fingers when working on flat surfaces
- > Small, drop shaped head for confined areas
- > Fine-toothed (60 teeth), with lever change and push-button release
- > Return angle 6 degrees


- > Non-slip 2-component handle with hanging hole
- > For hand-operated sockets and accessories with square drive as per DIN 3120 - C 12.5, ISO 1174, ball locking device
- > GEDORE vanadium steel 31CrV3, chrome-plated

1993 U-20 REVERSIBLE RATCHET 1/2"

- > Used throughout industry and the automotive world - and as well in confined spaces
- > Acc. to DIN 3122, ISO 3315
- > Small, drop shaped head for confined areas
- > Fine-toothed (60 teeth), with lever change and push-button release
- > Return angle 6 degrees
- > Non-slip 2-component handle with hanging hole
- > For hand-operated sockets and accessories with square drive as per DIN 3120 - C 12.5, ISO 1174, ball locking device
- > GEDORE vanadium steel 31CrV3, chrome-plated











"		<i>_</i> °	∢mm ►	mmÇ	$\Delta_{kg}\Delta$	Code	No.
1/2	12.5	6	270	37.5	0.536	1436686	1993 U-20

1993 U-10 L REVERSIBLE RATCHET 1/2"

long pattern

- > For an increase in torque, long design
- > Acc. to DIN 3122, ISO 3315
- > With recessed lever change
- > Push-button release
- > Return angle 7.5 degrees
- > Non-slip 2-component handle with hanging hole
- > Locks in the middle position: When the lever is flipped, it automatically engages for clockwise or anti-clockwise operation
- > For hand-operated sockets and accessories with square drive as per DIN 3120 - C 12.5, ISO 1174, ball locking device
- > GEDORE vanadium steel 31CrV3, chrome-plated

1993 U-10 T REVERSIBLE RATCHET 1/2"

- > Particularly for the demanding use experienced > Locks in the middle position: When the lever is in industry and with utility vehicles
- > Acc. to DIN 3122, ISO 3315
- > With recessed lever change
- > Push-button release
- > Return angle 7.5 degrees
- > Non-slip 2-component handle with hanging hole
- flipped, it automatically engages for clockwise or anti-clockwise operation
- > For hand-operated sockets and accessories with square drive as per DIN 3120 - C 12.5, ISO 1174, ball locking device
- > GEDORE vanadium steel 31CrV3, chrome-plated













"		L°	∢ mm ►	mm©	$\Delta kg \Delta$	Code	No.
1/2	12.5	7,5	350	41	0.696	6154550	1993 U-10 L

"		€°	⊲ mm ►	mm⊄	Δ_{kg}	Code	No.
1/2	12.5	7,5	270	39	0.598	6142620	1993 U-10 T



Ratchets 20 (3/4")

3293 U-10

REVERSIBLE RATCHET 3/4"

- > Particularly for the demanding use experienced in industry and with utility vehicles
- > Acc. to DIN 3122, ISO 3315
- > With recessed lever change, locks in middle position
- > Return angle 11.25 degrees

- > Push-fit tube handle
- > For hand-operated sockets and accessories with square drive as per DIN 3120 - D 20, ISO 1174 with locking pin
- > GEDORE vanadium steel 31CrV3, chrome-plated





"		<i>4</i> .°	∢mm ►	mmQ ²	$\Delta_{kg}^{\dagger}\Delta$	Code	No.
3/4	20	11,25	620	57.5	2.630	6277980	3293 U-10

3293 U-2

REVERSIBLE RATCHET 3/4"

- > Especially for working in confined spaces
- > Acc. to DIN 3122, ISO 3315
- > With disc change, fine-toothed and robust
- > Return angle 7.2 degrees

- > For hand-operated sockets and accessories with square drive as per DIN 3120 - D 20, ISO 1174 with locking pin
- > GEDORE vanadium steel 31CrV3, chrome-plated



• "		 ✓o	⊲ mm ►	mmÇ.	 \[\] \	Code	No.	
3/4	20	7,2	510	60	1.435	6278600	3293 U-2	

3293 U-3

REVERSIBLE RATCHET 3/4"

- > Especially for working in confined spaces, as in the automotive business and with utility vehicles
- > Acc. to DIN 3122, ISO 3315
- > With non-slip metal disc change, fine-toothed (72 teeth) and robust
- > Return angle 5 degrees
- > Push-fit tube handle

- > For hand-operated sockets and accessories with square drive as per DIN 3120 - D 20, ISO 1174, with locking pin
- > GEDORE vanadium steel 31CrV3, chrome-plated



"		4°	l⊲ mm ►l	mm@ž	∆ kg ∆	Code	No.
3/4	20	5	620	62.5	2.610	6278790	3293 U-3

3293 Z-94

RATCHET HANDLE WITH COUPLER 3/4"

- > Used throughout industry and the automotive world
- > Acc. to DIN 3122, ISO 3315
- > With square coupler, medium-fine toothed, extremely rugged
- > Return angle 10 degrees

- > For hand-operated sockets and accessories with square drive as per DIN 3120 - D 20, ISO 1174 with locking pin
- > GEDORE vanadium steel 31CrV3, chrome-plated







Ratchets 25 (1")

2193 U-10

REVERSIBLE RATCHET 1"

- > Particularly for the demanding use experienced in industry and with utility vehicles
- > Acc. to DIN 3122, ISO 3315
- > With recessed lever change, locks in middle position
- > Return angle 11.25 degrees

- > Push-fit bar handle no. 2187 G
- > For hand-operated sockets and accessories with square drive as per DIN 3120 D 25, ISO 1174 with locking pin
- > GEDORE vanadium steel 31CrV3, chrome-plated







Execution	"		4°	∢mm⊁	mm 😅	$\Delta_{kg}^{+}\Delta$	Code	No.
complete	1	25	11,25	810	61.5	5.210	6180550	2193 U-10
head only	1	25		184	61.5	1.980	6196120	2193 U-10 K
tommy bar				700		3.275	6195900	2187 G

2193 U-3

REVERSIBLE RATCHET 1"

- > Especially for working in confined spaces, as with utility vehicles
- > Acc. to DIN 3122, ISO 3315
- > With non-slip metal disc change, fine-toothed (72 teeth) and robust
- > Return angle 5 degrees

- > Push-fit tube handle
- > For hand-operated sockets and accessories with square drive as per DIN 3120 D 25, ISO 1174, with locking pin
- > GEDORE vanadium steel 31CrV3, chrome-plated





Execution	"		€°	∣⊲ mm ⊳∣	mm⊋į	∆kg ∆	Code	No.	
complete	1	25	5	720	76	4.160	6180630	2193 U-3	
head only	1	25				2.000	1637487	2193 U-3 K	
tube						2.175	1382500	2193 Z/17	

2193 Z-94

RATCHET HANDLE WITH COUPLER 1"

- > Used throughout industry and the automotive world
- > Acc. to DIN 3122, ISO 3315
- > With square coupler, medium-fine toothed, extremely rugged
- > Return angle 9 degrees

- > Push-fit tube handle
- > For hand-operated sockets and accessories with square drive as per DIN 3120 D 25, ISO 1174 with locking pin
- > GEDORE vanadium steel 31CrV3, chrome-plated





Execution	"		4°	l⊲ mm ►l	mmQ ²	∆kg ∆	Code	No.	
complete	1	25	9	720	41	4.115	6181520	2193 Z-94	
head only	1	25				1.175	1493779	2193 Z K	
tuhe						2 175	1382500	2193 7/17	