

ENERPAC

POWERFUL SOLUTIONS. GLOBAL FORCE.



GB

E 3 2 9 e

INDUSTRIAL TOOLS

Table of Contents

Introduction

The World Class Brand 2-3

Cylinders & Lifting Products 4 - 69

Introduction & Overview 4 - 5

RC-Series, Single-Acting, General Purpose Cylinders 6 - 9

A, CAT, JBI, RB, RE-Series, Cylinder Accessories 10

RA-Series, Aluminium Cylinders, Introduction 11

RAC-Series, Single-Acting, Aluminium Cylinders 12 - 13

RACL-Series, Single-Acting,

Aluminium Lock Nut Cylinders 14 - 15

RACH-Series, Single-Acting,

Aluminium Hollow Plunger Cylinders 16 - 17

RAR-Series, Double-Acting,

Aluminium Cylinders 18 - 19

RT-Series, Telescopic Cylinders 20 - 21

RSM, RCS-Series, Single-Acting,

Low-Height Cylinders 22 - 23

CULP-Series, Ultra-Flat Cylinders with Stop Ring 24

CUSP-Series, Ultra-Flat Cylinders, High Tonnage 25

LPL-Series, Single-Acting,

Low-Height High Tonnage Lock Nut Cylinders 26 - 27

BRC, BRP-Series, Single-Acting, Pull Cylinders 28 - 29

RCH-Series, Single-Acting,

Hollow Plunger Cylinders 30 - 31

RRH-Series, Double-Acting,

Hollow Plunger Cylinders 32 - 33

BRD-Series, Double-Acting,

Precision Production Cylinders 34 - 35

RR-Series, Double-Acting,

Long Stroke Cylinders 36 - 39

High Tonnage Cylinders,

HCG, HCR, HCL, HCRL-Series

Introduction & Quick Selection 40 - 43

HCG-Series, Single-Acting,

High Tonnage Cylinders 40 - 47

HCR-Series, Double-Acting,

High Tonnage Cylinders 40 - 43, 48 - 51

HCL-Series, Single-Acting,

High Tonnage Lock Nut Cylinders 40 - 43, 52 - 55

HCRL-Series, Double-Acting,

High Tonnage Lock Nut Cylinders 40 - 42, 56 - 57

SC-Series, Cylinder-Pump Sets 58 - 59

P, RC, V-Series, Extreme Environment Products 60

SC, SL, SR, SW-Series, Power Box Sets,

Portable Tool Box 61

JH, JHA-Series, Aluminium and Steel Jacks 62

GBJ-Series, Steel Bottle Jacks 63

PR-Series, POW'R-RISER® Mobile Lifting Jacks 64 - 65

PL-Series, POW'R-LOCK® Mobile Lifting Systems 66 - 67

Custom Hydraulic Cylinders & Pumps 68 - 69

Pumps & Directional Control Valves 70 - 119

Introduction & Overview 70 - 71

P-Series, Lightweight Hand Pumps 72 - 73

P-Series, Steel Hand Pumps 74 - 75

P-Series, Low Pressure Hand Pumps 76 - 77

MP-Series, Multifluid Hand Pumps 78

P-Series, Foot Pump 79

P, 11-Series, Ultra-High Pressure Hand Pumps 80 - 81

XC-Series, Cordless Hydraulic Pumps 82 - 83

PU-Series, Economy Electric Pumps 84 - 85

PE-Series, Submerged Electric Pumps 86 - 89

Z-Class Power Pumps Introduction 90 - 91

ZU4-Series, Portable Electric Pumps 92 - 97

ZE-Series, Electric Pumps 98 - 103

PA-Series, Air Hydraulic Foot Pumps 104

PAM-Series, Air Hydraulic Pumps 105

PATG-Series, Turbo II, Air Hydraulic Pumps 106 - 107

XA-Series, Air Driven Foot Pumps 108 - 109

ZA4-Series, Modular Air Hydraulic Pumps 110 - 111

ZG-Series, Gasoline Hydraulic Pumps 112 - 113

Directional Control Valves 114 - 119

Introduction & Overview 114 - 115

VM, VE-Series, Pump Mounted Valves 116 - 117

VC-Series, Remote Mounted Valves 118

VC, VM, VE-Series, Valve Dimensions 119

System Components & Control Valves 120 - 137

Introduction & Overview 120 - 121

H700-Series, High Pressure Hoses 122 - 123

A, C, F, T-Series, Hydraulic Couplers 124 - 125

HF-Series, Hydraulic Oil 126

A, AM-Series, Manifolds 127

FZ, BFZ, XSC-Series, Fittings 128

GF, GP-Series, Force & Pressure Gauges 128 - 129

G, H-Series, Pressure Gauges 130 - 131

T-Series, Test System Gauges 132

DGR-Series, Digital Pressure Gauge 133

GA45-Series, Gauge Adaptor Assembly 134

AMGC-Series, 4-Way Manifold Assemblies 134

GA, NV, V-Series, Gauge Accessories 135

V-Series, Pressure and Flow Control Valves 136 - 137

Hydraulic Presses 138 - 147

Introduction & Overview 138 - 139

XLP, VLP-Series, Bench & Workshop Presses 140 - 141

BPR-Series, Roll-Frame Presses 142 - 143

A-Series, C-Clamp and Arbor Presses 144 - 145

A, BSS, IPL, VB, VHJ-Series, Press Accessories 146

TM-Series, Tension Meter 147

LH-Series, Load Cells 147

Pullers 148 - 161

Introduction & Overview 148 - 149

BHP-Series, Master Puller Sets 150

BHP-Series, Grip Puller Sets 151

BHP-Series, Cross Bearing Puller Sets 152

BHP-Series, Bearing Cup and Bearing Pullers 153

EP-Series, Posi Lock® Mechanical Grip Pullers 154 - 157

EPH-Series, Posi Lock® 10 - 50 ton

Hydraulic Pullers and Accessories 158 - 160

EPH-Series, Posi Lock® 100 ton Hydr. Grip Pullers 161

Tools 162 - 181

Introduction & Overview 162 - 163

MS-Series, Maintenance Sets 164 - 167

SP-Series, Lightweight 35 ton Hydraulic Punch 168 - 169

SP-Series, 50 ton Double-Acting Punch 170 - 171

LW-Series, Hydraulic Vertical Lifting Wedge 172

SOH-Series, Hydraulic Machine Lifts 173

ER-Series, Heavy Duty Load Skates 174 - 175

CM-Series, Industrial Storage Cases 176

A, WR-Series, Wedgie & Spread Cylinders 177

WHC, WHR-Series, Hydraulic Cutterheads 178

WMC-Series, Self-Contained Hydraulic Cutters 179

STB-Series, Pipe Bender Sets 180 - 181

Bolting Tools and Pumps 182 - 237

Introduction & Overview 182 - 183

E-Series, Manual Torque Multipliers 184 - 185

S-Series, Square Drive

Hydraulic Torque Wrenches 186 - 188

TSP, RTE, SRS-Series, Accessories for S-Series 189

BSH-Series, Heavy-Duty Impact Sockets 190

Bolting Application Ideas, S-Series 191

W-Series, Low Profile Hexagon

Hydraulic Torque Wrenches 192 - 201

W-SL-Series, Ultra-Slim Stepped Width

Bi-Hexagonal Torque Wrenches 202 - 203

WCR-Series, Roller Cassette Wrenches 204

TSP, WTE, WRP-Series, Accessories for W-Series 205

PTW-Series, Pneumatic Torque Wrenches 206 - 207

ETW-Series, Electric Torque Wrenches 208 - 209

BLT, DSA, ED, RAT, SLR-Series,

Accessories for PTW and ETW-Series 210

Application Examples PTW and ETW-Series 211

Selection Matrix Wrench-Pump Combinations 212

PME, PMU-Series,

Portable Electric Torque Wrench Pumps 213

TQ-Series, Electric Torque Wrench Pumps 214 - 215

ZU4T-Series, Electric Wrench Pumps 216 - 219

ZE-Series, Electric Torque Wrench Pumps 220 - 221

ZA4T-Series, Air Driven Torque Wrench Pumps 222 - 225

ZUTP-Series,

Electric Tensioning Pump, 1500 bar 226 - 227

HT, B-Series, Hoses and Couplers, 1500 bar 227

ATP-Series, Air Pump 1500 bar 228

NC-Series, Hydraulic Nut Splitters 229

NS-Series, Hydraulic Nut Splitters 230 - 231

FS-Series, Hydraulic Flange Spreaders 232

FSH, FSM-Series, Wedge Spreaders 233

ATM-Series, Flange Alignment Tools 234 - 235

FF-Series, QuickFace Mechanical

Pipe Flange Face Tool 236 - 237

Heavy Lifting Technology 238 - 262

Introduction & Overview 238 - 239

SFP-Series, Electric Split-Flow Pumps 240 - 241

EVOB-Series,

Basic Synchronous Lifting Systems 242 - 243

EVO-Series,

Standard Synchronous Lifting Systems 244 - 245

BLS-Series, Climbing Jacks 246 - 247

JS-Series, Jack-Up Systems 248 - 249

HSL-Series, Heavy Lifting Strand Jacks 250 - 251

SHS-Series, Synchoist,

Synchronous Hoisting Systems 252 - 253

SHAS-Series, Synchoist, Autonomous

Wireless Synchronous Hoisting System 254 - 255

SL, SBL, MBL-Series,

Telescopic Hydraulic Gantries 256 - 257

HSK, LH-Series, Skidding Systems 258 - 259

SPMT-Series, Self-Propelled Modular Transporter 260

Custom Solutions – Experience & Expertise 261

Project Gallery – Custom Heavy Lifting Solutions 262

Yellow Pages 263 - 277

Introduction & Overview 263

Safety Instructions 264 - 265

Pump Selection 266

Selection Worksheet 267

Basic System Set-ups 268 - 269

Basic Hydraulics 270 - 271

Conversion Tables 272

Cylinder Speed Charts 273

Valve Information 274

Hexagon Nut and Bolt Sizes 275

Bolting Theory – Torque Tightening 276 - 277

About Enerpac 278

Enerpac Academy 279

Enerpac Maintenance Program (EMP) 279

Enerpac Worldwide Locations 280

Model Number Index

Section Index

Page(s) ▼ Page(s) ▼ Page(s) ▼ Page(s) ▼

| | |
|------------------------------|--------------------------------|
| A | EMB 174 |
| A5-A10 166 | EP 154-157 |
| A12 10 | EPH 158-161 |
| A13-A28 166 | EPP 155-157 |
| A29-A53 10 | EPX 157 |
| A64-A66 126 | ER-ES 174-175 |
| A92 166, 177 | ETW 208-210 |
| A102 10, 37 | EVO 242-245 |
| A128-A192 166 | F |
| A183 144 | F 124-125 |
| A185 144, 166 | FF 236-237 |
| A200R 146 | FH 124-125 |
| A205-A220 144 | FR 124-125 |
| A218-A305 166 | FRL 207 |
| A252 10, 37 | FS 232 |
| A310, A330 144 | FSB 172, 233 |
| A530-A595 166 | FSH 233 |
| A604 124-125 | FSM 233 |
| A607 166 | FZ 127 |
| A630 124-125 | G |
| A650 166 | G 130-131 |
| AH 124-125 | GA 134-135 |
| AM 126, 134 | GBJ 63 |
| AR 124-125 | GF 128-129 |
| ATM 234-235 | GP 128-129 |
| ATP 228 | H |
| AW 10 | H 122-123, 131 |
| B | HA 123 |
| B 227 | HB 123 |
| BAD 35 | HC 123 |
| BFZ 127 | HCG 40-47 |
| BH 227 | HCL 40-43, 52-55 |
| BHP 150-153 | HCR 40-43, 48-51 |
| BLS 246-247 | HCRL 40-42, 56-57 |
| BLT 210 | HF 126 |
| BPR 142-143 | HP 31, 33 |
| BR 227 | HSK 258-259 |
| BRC 28-29 | HSL 250-251 |
| BRD 34-35 | HT 227 |
| BRP 28-29 | I |
| BSA 129, 131 | IPL 146 |
| BSH 190 | J |
| BSS 146 | JB1 10 |
| BW 229 | JH 62 |
| BZ 180-181 | JHA 62 |
| C | JS 248-249 |
| C 124-125 | L |
| CAT 10, 23 | LH 147, 258-259 |
| 37, 53, 55 | LPL 26-27, 40-41 |
| CATG 13, 15, 19 | LW 172 |
| 45, 47, 49, 53 | M |
| CD-CF-CH 125 | MBL 256-257 |
| CM 176 | MP 78 |
| CMF 125 | MS 164-167 |
| CR 124-125 | MSP 169 |
| CU 24-25 | MZ 164-167 |
| CW 166 | N |
| D | NC 229 |
| DGR 133 | NS 230-231 |
| DSA 210 | NV 135 |
| E | |
| E 184-185 | |
| ED 210 | |
| ELP 174-175 | |

| | |
|----------------------------|---------------------------------|
| P | T |
| P 72-79 | T 125, 132 |
| P142AL 60 | TH 125 |
| P392AL 60 | THC 212-213, 219 |
| P392FP 79 | 221-222, 224 |
| PA 104-107 | THQ 212-214, 219 |
| PAM 105 | 221-222, 224 |
| PAMG 106-107 | TM 147 |
| PATG 106-107 | TSP 186, 189 |
| PARG 106-107 | 192, 205 |
| PC 72, 74 | TQ 212, 214-215 |
| PE 86-89 | V |
| PF25 100 | V 60, 135-137 |
| PL 66-67 | VA2 105 |
| PM 212-213 | VB 141, 146 |
| PR 64-65 | VC 118-119 |
| PTW 206-207 | VE 116-119 |
| PU 84-85 | VHJ 146 |
| R | VLP 140-141 |
| RA 11 | VM 116-119 |
| RAC 12-13 | VMC 117-119 |
| RACH 16-17 | W |
| RACL 14-15 | W 192-203 |
| RAR 18-19 | WCB 178-179 |
| RAT 210 | WCR 204 |
| RB 10 | WHC 178 |
| RC 6-9, 58-61 | WHR 178 |
| RCH 30-31 | WMC 179 |
| RCS 22-23 | WR 167, 177 |
| 58, 61 | WRP 205 |
| RE 10 | WTE 205 |
| RFL 105-109 | X |
| RR 36-39 | XA 61 |
| RRH 32-33 | 108-109, 231 |
| RSM 22-23, 61 | XC 61, 82-83, 231 |
| RT 20-21 | XLK 108 |
| RTE 189 | XLP 140-141 |
| RWH 150 | XPG 108 |
| S | XSC 82, 108, 127 |
| S 186-189 | Z |
| SB 172, 233 | Z 125 |
| SBL 256-257 | ZA4 91, 110-111 |
| SBZ 94, 100 | ZA4T 91, 212 |
| 218, 224 | 222-225 |
| SC 58-59, 61 | ZCF 94-95 |
| SDA 188 | 100-101 |
| SFP 240-241 | ZCP 101 |
| SHAS 254-255 | ZE 91, 98-103 |
| SHS 252-253 | 212, 220-221 |
| SL 256-257 | ZG 112-113 |
| SLR 210 | ZHE 95, 101, 218 |
| SOH 173 | ZLS 94-95, 100-101 |
| SP 168-171 | ZPF 94-95, 100-101 |
| SPD 169 | ZU4 91-97 |
| SPK 168 | ZU4T 91, 212 |
| SPMT 260 | 216-219 |
| SRA 210 | ZUTP 226-227 |
| SRS 61, 189 | ZR 94-95 |
| STB 180-181 | 100-101, 224 |
| STC 178 | 5 |
| STF 232-233 | 11 - 45 80-81 |
| STN 229 | 72 - 83 80-81 |
| STP 169 | |
| SWH 186, | |
| 192, 202 | |
| SWR 61 | |

Cylinders & Lifting Products



Page 4-69

Pumps & Directional Control Valves



Page 70-119

System Components & Control Valves



Page 120-137

Presses



Page 138-147

Pullers



Page 148-161

Tools



Page 162-181

Bolting Tools



Page 182-237

Heavy Lifting Technology



Page 238-262

The World Class Brand

A complete range of quality high pressure hydraulic tools, controlled force products and solutions for all industrial applications, with local availability and after sale service anywhere in the world... this is what has made Enerpac the undisputed global market leader in high pressure hydraulics.

Across every continent, Enerpac's network of authorized distributors and service centers can reach even the most remote locations, supplying and servicing products that are designed to enhance productivity and performance, while making the workplace safer.

With over 150 sales specialists and a network of service and engineering support in 22 countries across the globe, Enerpac has become the product of choice in industries such as heavy lifting, manufacturing, construction, energy, oil & gas, shipbuilding, railroads, mining, and metals transformation.

Always at the leading edge of technology, Enerpac has continued to develop its range of time and cost-savings tools, utilizing modern engineered materials to improve productivity and minimize operator fatigue.

Enerpac's commitment to the continued development of quality high force tools ensures that the products you purchase are the best tools in the industry.

We will continue to lead the way in the development of quality high force tools for all industrial applications.



10 Reasons to Work with Enerpac

- **Expert Design**
- **Highly Reliable**
- **Service Excellence**
- **Worldwide Experience**
- **Application Support**
- **Availability**
- **Quality**
- **Value**
- **Innovative Products**
- **Systems Solutions**



Total Quality

Our products are tested to the most exacting standards. These high standards guarantee the quality, price and performance requirements of the markets we serve around the globe.

Global Network, Support and Service

Enerpac has an extensive network of authorized distributors and service centers located in more than 90 countries worldwide. You can rely on Enerpac for the products and technical support you need to get your job done, anywhere in the world.

Logistics Excellence

Enerpac's mission is to maintain service excellence in the ever-changing world of modern distribution. Providing our extensive range of products to our thousands of distributors worldwide demands a logistic expertise only a market leader can provide.



A Tradition of Innovation

Enerpac has a long history of finding new solutions to better meet the challenges of the industries we serve. We were the first to develop a composite hand pump and the first to offer a computerized lifting system.

Our latest innovations include the next generation ultra-flat, low height and high tonnage cylinders, and telescopic cylinders with highest level of durability, the new XA-Series of air driven foot pumps, designed for less operator fatigue – with the unique XVARI® Technology, delivering variable oil flow and fine metering for precise control, a full range of aluminium cylinders with the strength of steel and the advantages of aluminium and the Z-Class series of power pumps pumps that were designed to run cooler, use less electricity and are easy to service.

We design and manufacture heavy lifting equipment. For more than 60 years, we've combined high pressure hydraulics and controls to deliver intelligent and innovative solutions that maintain the highest level of quality, reliability and safety.

ENERPAC 
POWERFUL SOLUTIONS. GLOBAL FORCE.

Enerpac hydraulic cylinders are available in hundreds of different configurations. Whatever the industrial application... lifting, pushing, pulling, bending, holding... whatever the force capacity, stroke length, or size restrictions... single- or double-acting, solid or hollow plunger, you can be sure that Enerpac has the cylinder to suit your high force application. Enerpac jacking cylinders fully comply to ASME B30.1 (except BRD-Series).



GR2 Bearing Technology

The exclusive GR2 is a unique bearing design on RC-Series DUO general purpose cylinders which absorbs eccentric load stresses to protect your cylinder against abrasion, over-extending or plunger blow-outs and jamming or top-end mushrooming. As a result, RC-Series DUO cylinders provide long, trouble-free operation.

Improved saddle retention

Hardened plunger saddle protects plunger end during all lifting operations. Easily removable for access to plunger mounting threads.

Thread protector

Protector is easily attached and removed with oily hands or whilst wearing gloves.

Easy assembly and disassembly

External access to fasteners requires only standard shop tools for simplified maintenance.

Heavy-Duty return spring

Pre-tensioned return spring improves retraction performance, reducing retraction times.

Unique GR2 Bearing System

GR2 design surrounds seal of longer stroke models for improved life and reduced bearing loads. Bearing surface area increases side-load resistance and significantly improves cylinder life.



Coupler Protector

Coupler Dust Cap has new shape and more pliable material for easy push-on/pull-off operation. Protector is easily attached and removed with oily hands or whilst wearing gloves.





































Easy assembly and disassembly

External access to fasteners requires only standard shop tools for simplified maintenance.

Note: The cut-away drawing is representative of typical cylinder construction, and may not represent all cylinders in this section.



Hydraulic Cylinders and Lifting Products Section Overview

| Capacity ¹⁾ ton (kN) | Stroke Range (mm) | Cylinder Type and Functions | Series | Page |
|------------------------------------|----------------------|---------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------|
| 5 - 95 (45 - 933) | 16 - 362 | General Purpose Cylinders, Single-Acting Accessories: Saddles, Base Plates, Mounting Attachments |  RC A, CAT JBI, RE |  6 ▶ 10 ▶ |
| 20 - 150 (229 - 1589) | 50 - 250 | Aluminium Cylinders, Single-Acting, Lock Nut, Hollow Plunger |   RAC RACL RACH |  12 ▶ 14 ▶ 16 ▶ |
| 20 - 150 (229 - 1589) | 50 - 250 | Aluminium Cylinders, Double-Acting, Solid Plunger |  RAR |  18 ▶ |
| 14 - 31 (137 - 309) | 270 - 600 | Multi-Stage Telescopic Cylinders, Single-Acting, Load Return |  RT |  20 ▶ |
| 5 - 150 (45 - 1386) | 6 - 62 | Flat-Jac® Cylinders, Single-Acting Low-Height Cylinders, Single-Acting |  RSM RCS |  22 ▶ |
| 10 - 1000 (97 - 10.165) | 6 - 17 | Ultra-Flat Cylinders, Single-Acting, Load Return with Stop Ring or Tilting Function |  CULP CUSP |  24 ▶ 25 ▶ |
| 60 - 500 (606 - 5114) | 45 - 50 | Low Height Lock Nut Cylinders Single-Acting, Load Return |  LPL |  26 ▶ |
| 2,5 - 50 (24 - 506) | 127 - 154 | Pull Cylinders, Single-Acting, Spring Return |  BRC BRP |  28 ▶ |
| 13 - 145 (125 - 1429) | 8 - 258 | Hollow Plunger Cylinders, Single- and Double-Acting |   RCH RRH |  30 ▶ 32 ▶ |
| 4 - 23 (35 - 222) | 28 - 260 | Precision Production Cylinders, Double-Acting (including Mounting Attachments) |  BRD |  34 ▶ |
| 10 - 520 (101 - 5108) | 16 - 1219 | Long Stroke Cylinders, Double-Acting |  RR |  36 ▶ |
| 50 - 1000 (550 - 10.644) | 50 - 300 | High Tonnage Cylinders, Single- and Double-Acting |   HCG HCR |  44 ▶ 48 ▶ |
| 50 - 1000 (550 - 10.644) | 50 - 300 | High Tonnage Lock Nut Cylinders, Single- and Double-Acting |   HCL HCRL |  52 ▶ 56 ▶ |
| 1 - 95 (8,9 - 933) | 11 - 362 | Cylinder - Pump Sets, Single-Acting Extreme Environment Products Power Box, Portable Tool Sets |  SC RC, P, V SL, SR, SW |  58 ▶ 60 ▶ 61 ▶ |
| 2 - 150 (20 - 1335) | 62 - 460 | Aluminium and Steel Jacks Industrial Steel Bottle Jacks |  JH, JHA GBJ |  62 ▶ 63 ▶ |
| 54 - 181 (533 - 1778) | 356 - 686 | POW'R RISER® Mobile Lifting Jacks POW'R LOCK® Mobile Lift System |  PR PL |  64 ▶ 66 ▶ |

¹⁾ All ton values specified in this catalog are metric ton and are for cylinder class identification only. Please refer to the kN data for calculations.

RC-Series DUO, Single-Acting Cylinders

▼ From left to right: RC-506, RC-50, RC-2510, RC-154, RC-10010, RC-55, RC-1010



- **Unique GR2 Bearing Design, reduces wear, extending life**
- **Collar threads, plunger threads and base mounting holes enable easy fixturing (on most models)**
- **Designed for use in all positions**
- **High strength alloy steel for durability**
- **Redesigned cylinder thread protector for ease of use**
- **Heavy-duty, pretensioned spring improves retraction speed**
- **Baked enamel finish for increased corrosion resistance**
- **CR-400 coupler and dust cap included on all models**
- **Plunger wiper reduces contamination, extending cylinder life.**

▼ *Foundation repair: to re-stabilize the foundation, the 308 ton silo needed to be lifted, levelled and structurally supported. 25 ton RC-Series hydraulic jacks were attached to a bracket on the top of each steel pier. Powered by a Z-Class pump, the hydraulic jacks applied 20 ton of force at each placement to lift the silo 5,1 cm.*



The Industry Standard General Purpose Cylinder



Saddles

All RC cylinders (except RC-50, 101) are equipped with hardened removable grooved saddles. For tilt and flat saddles, see the RC-Series accessory page.

Page: 10



Base Plates

To ensure the stability of cylinders for lifting applications, base plates are available for 10, 25 and 50 ton RC cylinders.

Page: 10



Specialty Attachments

For solving all kinds of application problems, specialty attachments are available for 5, 10 and 25 ton RC cylinders.

Page: 166

▼ *Synchronous lifting set-up for 200 ton petrochemical process module using twelve RC-2510 cylinders. To ensure the stability of the cylinders JBI-25 base plates are installed.*



Single-Acting, General Purpose Cylinders




GR2 Bearing Technology

The exclusive GR2 is a unique bearing design on RC-Series DUO cylinders which absorbs eccentric load stresses to protect your cylinder against

abrasion, over-extending or plunger blow-outs and jamming or top-end mushrooming. As a result, RC-Series DUO cylinders provide long, trouble-free operation.

▼ QUICK SELECTION CHART

For complete technical information see next page.

| Cylinder Capacity | Stroke | Model Number | Cylinder Effective Area | Oil Capacity | Collapsed Height |  |
|-------------------|--------|--------------|-------------------------|--------------------|------------------|-----------------------------------------------------------------------------------|
| ton (kN) | (mm) | | (cm ²) | (cm ³) | (mm) | (kg) |
| 5 (45) | 16 | RC-50 | 6,5 | 10 | 41 | 1,0 |
| | 25 | RC-51 | 6,5 | 16 | 110 | 1,0 |
| | 76 | RC-53 | 6,5 | 50 | 165 | 1,5 |
| | 127 | RC-55 * | 6,5 | 83 | 215 | 1,9 |
| | 177 | RC-57 | 6,5 | 115 | 273 | 2,4 |
| 10 (101) | 232 | RC-59 | 6,5 | 151 | 323 | 2,8 |
| | 26 | RC-101 | 14,5 | 38 | 89 | 1,8 |
| | 54 | RC-102 * | 14,5 | 78 | 121 | 2,3 |
| | 105 | RC-104 | 14,5 | 152 | 171 | 3,3 |
| | 156 | RC-106 * | 14,5 | 226 | 247 | 4,4 |
| | 203 | RC-108 | 14,5 | 294 | 298 | 5,4 |
| | 257 | RC-1010 * | 14,5 | 373 | 349 | 6,4 |
| | 304 | RC-1012 | 14,5 | 441 | 400 | 6,8 |
| 15 (142) | 356 | RC-1014 | 14,5 | 516 | 450 | 8,2 |
| | 25 | RC-151 | 20,3 | 51 | 124 | 3,3 |
| | 51 | RC-152 | 20,3 | 104 | 149 | 4,1 |
| | 101 | RC-154 * | 20,3 | 205 | 200 | 5,0 |
| | 152 | RC-156 * | 20,3 | 308 | 271 | 6,8 |
| | 203 | RC-158 | 20,3 | 411 | 322 | 8,2 |
| | 254 | RC-1510 | 20,3 | 516 | 373 | 9,5 |
| | 305 | RC-1512 | 20,3 | 619 | 423 | 10,9 |
| 25 (232) | 356 | RC-1514 | 20,3 | 723 | 474 | 11,8 |
| | 26 | RC-251 | 33,2 | 86 | 139 | 5,9 |
| | 50 | RC-252 * | 33,2 | 166 | 165 | 6,4 |
| | 102 | RC-254 * | 33,2 | 339 | 215 | 8,2 |
| | 158 | RC-256 * | 33,2 | 525 | 273 | 10,0 |
| | 210 | RC-258 | 33,2 | 697 | 323 | 12,2 |
| | 261 | RC-2510 | 33,2 | 867 | 374 | 14,1 |
| | 311 | RC-2512 | 33,2 | 1033 | 425 | 16,3 |
| 30(295) | 362 | RC-2514 * | 33,2 | 1202 | 476 | 17,7 |
| | 209 | RC-308 | 42,1 | 880 | 387 | 18,1 |
| 50 (498) | 51 | RC-502 | 71,2 | 362 | 176 | 15,0 |
| | 101 | RC-504 | 71,2 | 719 | 227 | 19,1 |
| | 159 | RC-506 * | 71,2 | 1131 | 282 | 23,1 |
| | 337 | RC-5013 | 71,2 | 2399 | 460 | 37,6 |
| 75 (718) | 156 | RC-756 | 102,6 | 1601 | 285 | 29,5 |
| | 333 | RC-7513 | 102,6 | 3417 | 492 | 59,0 |
| 95 (933) | 168 | RC-1006 | 133,3 | 2239 | 357 | 59,0 |
| | 260 | RC-10010 | 133,3 | 3466 | 449 | 72,6 |

* Available as set, see note on this page.

RC Series



Capacity:

5 - 95 ton

Stroke:

16 - 362 mm

Maximum Operating Pressure:

700 bar



Think Safety

Manufacturer's rating of load and stroke are maximum safe limits.

Good practice encourages using only 80% of these ratings.

Page: 264



Lightweight Aluminium Cylinders

If you need a higher cylinder capacity-to-weight-ratio the RAC-Series are the perfect choice.

Page: 13




Gauges

Minimize the risk of overloading and ensure long, dependable service from your equipment. Refer

to the System Components Section for a full range of gauges.

Page: 121





Cylinder-Pump Sets

All cylinders marked with an * are available as sets (cylinder, gauge, couplers, hose and pump) for your ordering convenience.





Page: 58

RC-Series DUO, Single-Acting Cylinders

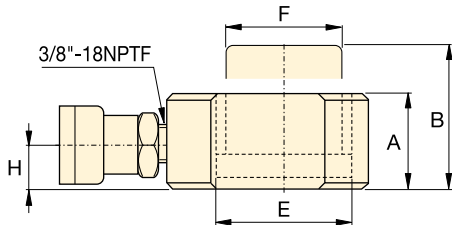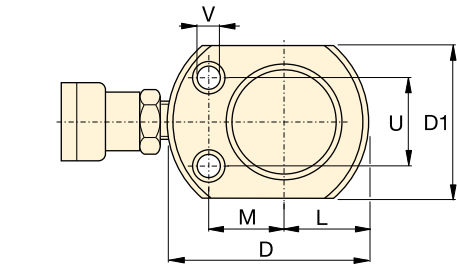


RC-50

RC-101 only
(U1 = 19 mm)

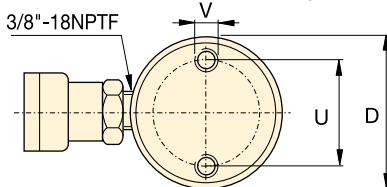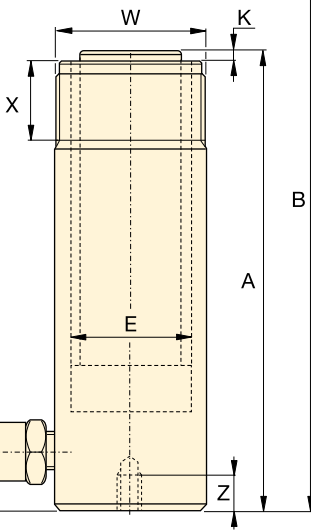

RC-51 - RC-5013



RC-1006, RC-10010



Speed Chart

See the Enerpac Cylinder Speed Chart in our 'Yellow Pages' to determine your approximate cylinder speed.

Page: 273

◀ For full features see previous page.

| Cylinder Capacity | Stroke | Model Number | Cylinder Effective Area | Oil Capacity | Collapsed Height | Extended Height | Outside Dia. |
|--------------------|--------|------------------------------|-------------------------|--------------------|------------------|-----------------|------------------|
| ton (kN) | (mm) | | (cm ²) | (cm ³) | A (mm) | B (mm) | D (mm) |
| 5 (45) | 16 | RC-50 ²⁾ | 6,5 | 10 | 41 | 57 | 58 ³⁾ |
| | 25 | RC-51 | 6,5 | 16 | 110 | 135 | 38 |
| | 76 | RC-53 | 6,5 | 50 | 165 | 241 | 38 |
| | 127 | RC-55 ¹⁾ | 6,5 | 83 | 215 | 342 | 38 |
| | 177 | RC-57 | 6,5 | 115 | 273 | 450 | 38 |
| | 232 | RC-59 | 6,5 | 151 | 323 | 555 | 38 |
| 10 (101) | 26 | RC-101 ⁴⁾ | 14,5 | 38 | 89 | 115 | 57 |
| | 54 | RC-102 ¹⁾ | 14,5 | 78 | 121 | 175 | 57 |
| | 105 | RC-104 | 14,5 | 152 | 171 | 276 | 57 |
| | 156 | RC-106 ¹⁾ | 14,5 | 226 | 247 | 403 | 57 |
| | 203 | RC-108 | 14,5 | 294 | 298 | 501 | 57 |
| | 257 | RC-1010 ¹⁾ | 14,5 | 373 | 349 | 606 | 57 |
| | 304 | RC-1012 | 14,5 | 441 | 400 | 704 | 57 |
| | 356 | RC-1014 | 14,5 | 516 | 450 | 806 | 57 |
| 15 (142) | 25 | RC-151 | 20,3 | 51 | 124 | 149 | 69 |
| | 51 | RC-152 | 20,3 | 104 | 149 | 200 | 69 |
| | 101 | RC-154 ¹⁾ | 20,3 | 205 | 200 | 301 | 69 |
| | 152 | RC-156 ¹⁾ | 20,3 | 308 | 271 | 423 | 69 |
| | 203 | RC-158 | 20,3 | 411 | 322 | 525 | 69 |
| | 254 | RC-1510 | 20,3 | 516 | 373 | 627 | 69 |
| | 305 | RC-1512 | 20,3 | 619 | 423 | 728 | 69 |
| | 356 | RC-1514 | 20,3 | 723 | 474 | 830 | 69 |
| 25 (232) | 26 | RC-251 | 33,2 | 86 | 139 | 165 | 85 |
| | 50 | RC-252 ¹⁾ | 33,2 | 166 | 165 | 215 | 85 |
| | 102 | RC-254 ¹⁾ | 33,2 | 339 | 215 | 317 | 85 |
| | 158 | RC-256 ¹⁾ | 33,2 | 525 | 273 | 431 | 85 |
| | 210 | RC-258 | 33,2 | 697 | 323 | 533 | 85 |
| | 261 | RC-2510 | 33,2 | 867 | 374 | 635 | 85 |
| | 311 | RC-2512 | 33,2 | 1033 | 425 | 736 | 85 |
| | 362 | RC-2514 ¹⁾ | 33,2 | 1202 | 476 | 838 | 85 |
| 30 (295) | 209 | RC-308 | 42,1 | 880 | 387 | 596 | 101 |
| 50 (498) | 51 | RC-502 | 71,2 | 362 | 176 | 227 | 127 |
| | 101 | RC-504 | 71,2 | 719 | 227 | 328 | 127 |
| | 159 | RC-506 ¹⁾ | 71,2 | 1131 | 282 | 441 | 127 |
| | 337 | RC-5013 | 71,2 | 2399 | 460 | 797 | 127 |
| 75 (718) | 156 | RC-756 | 102,6 | 1601 | 285 | 441 | 146 |
| | 333 | RC-7513 | 102,6 | 3417 | 492 | 825 | 146 |
| 95 (933) | 168 | RC-1006 | 133,3 | 2239 | 357 | 525 | 177 |
| | 260 | RC-10010 | 133,3 | 3466 | 449 | 709 | 177 |


¹⁾ Available as set, see note on page 7.

²⁾ RC-50 cylinder has a non removable grooved saddle and no collar thread.

³⁾ RC-50: D1 = 41 mm, L = 20 mm, M = 25 mm.

⁴⁾ RC-101 has plunger thread and non-removable saddle.

Single-Acting, General Purpose Cylinders



Couplers Included!

CR-400 couplers included on all models. Fits all HC-Series hoses.


Capacity:
5 - 95 ton

Stroke:
16 - 362 mm

Maximum Operating Pressure:
700 bar

RC Series



| Cylinder Bore Dia. E (mm) | Plunger Dia. F (mm) | Base to Adv. Port H (mm) | Saddle Dia. J (mm) | Saddle Protr. from Plgr. K (mm) | Plunger Internal Thread O | Plunger Thread Length P (mm) | Base Mounting Holes | | | Collar Thread W | Collar Thread Length X (mm) |  (kg) | Model Number |
|---------------------------|---------------------|--------------------------|--------------------|---------------------------------|---------------------------|------------------------------|---------------------|---------------|-------------------|-----------------|-----------------------------|---------------------------------------------------------------------------------------------|-----------------------|
| | | | | | | | Bolt Circle U (mm) | Thread V | Thd. Depth Z (mm) | | | | |
| 28,7 | 25,4 | 19 | 2) | 2) | 2) | 2) | 28 | 5,6 mm | — | — | — | 1,0 | RC-50 ²⁾ |
| 28,7 | 25,4 | 19 | 25 | 6 | 3/4" - 16 UN | 14 | 25 | 1/4" - 20 UN | 14 | 1 1/2" - 16 UN | 28 | 1,0 | RC-51 |
| 28,7 | 25,4 | 19 | 25 | 6 | 3/4" - 16 UN | 14 | 25 | 1/4" - 20 UN | 14 | 1 1/2" - 16 UN | 28 | 1,5 | RC-53 |
| 28,7 | 25,4 | 19 | 25 | 6 | 3/4" - 16 UN | 14 | 25 | 1/4" - 20 UN | 14 | 1 1/2" - 16 UN | 28 | 1,9 | RC-55 ¹⁾ |
| 28,7 | 25,4 | 19 | 25 | 6 | 3/4" - 16 UN | 16 | 25 | 1/4" - 20 UN | 14 | 1 1/2" - 16 UN | 28 | 2,4 | RC-57 |
| 28,7 | 25,4 | 19 | 25 | 6 | 3/4" - 16 UN | 16 | 25 | 1/4" - 20 UN | 14 | 1 1/2" - 16 UN | 28 | 2,8 | RC-59 |
| 42,9 | 38,1 | 19 | — | — | #10 - 24 UN | 6 | 39 | 5/16" - 18 UN | 12 | 2 1/4" - 14 UN | 26 | 1,8 | RC-101 ⁴⁾ |
| 42,9 | 38,1 | 19 | 35 | 6 | 1" - 8 UN | 19 | 39 | 5/16" - 18 UN | 12 | 2 1/4" - 14 UN | 26 | 2,3 | RC-102 ¹⁾ |
| 42,9 | 38,1 | 19 | 35 | 6 | 1" - 8 UN | 19 | 39 | 5/16" - 18 UN | 12 | 2 1/4" - 14 UN | 26 | 3,3 | RC-104 |
| 42,9 | 38,1 | 19 | 35 | 6 | 1" - 8 UN | 19 | 39 | 5/16" - 18 UN | 12 | 2 1/4" - 14 UN | 26 | 4,4 | RC-106 ¹⁾ |
| 42,9 | 38,1 | 19 | 35 | 6 | 1" - 8 UN | 19 | 39 | 5/16" - 18 UN | 12 | 2 1/4" - 14 UN | 26 | 5,4 | RC-108 |
| 42,9 | 38,1 | 19 | 35 | 6 | 1" - 8 UN | 19 | 39 | 5/16" - 18 UN | 12 | 2 1/4" - 14 UN | 26 | 6,4 | RC-1010 ¹⁾ |
| 42,9 | 38,1 | 19 | 35 | 6 | 1" - 8 UN | 19 | 39 | 5/16" - 18 UN | 12 | 2 1/4" - 14 UN | 26 | 6,8 | RC-1012 |
| 42,9 | 38,1 | 19 | 35 | 6 | 1" - 8 UN | 19 | 39 | 5/16" - 18 UN | 12 | 2 1/4" - 14 UN | 26 | 8,2 | RC-1014 |
| 50,8 | 41,4 | 19 | 38 | 9 | 1" - 8 UN | 25 | 48 | 3/8" - 16 UN | 12 | 2 3/4" - 16 UN | 30 | 3,3 | RC-151 |
| 50,8 | 41,4 | 19 | 38 | 9 | 1" - 8 UN | 22 | 48 | 3/8" - 16 UN | 12 | 2 3/4" - 16 UN | 30 | 4,1 | RC-152 |
| 50,8 | 41,4 | 19 | 38 | 9 | 1" - 8 UN | 22 | 48 | 3/8" - 16 UN | 12 | 2 3/4" - 16 UN | 30 | 5,0 | RC-154 ¹⁾ |
| 50,8 | 41,4 | 25 | 38 | 9 | 1" - 8 UN | 25 | 48 | 3/8" - 16 UN | 12 | 2 3/4" - 16 UN | 30 | 6,8 | RC-156 ¹⁾ |
| 50,8 | 41,4 | 25 | 38 | 9 | 1" - 8 UN | 25 | 48 | 3/8" - 16 UN | 12 | 2 3/4" - 16 UN | 30 | 8,2 | RC-158 |
| 50,8 | 41,4 | 25 | 38 | 9 | 1" - 8 UN | 25 | 48 | 3/8" - 16 UN | 12 | 2 3/4" - 16 UN | 30 | 9,5 | RC-1510 |
| 50,8 | 41,4 | 25 | 38 | 9 | 1" - 8 UN | 25 | 48 | 3/8" - 16 UN | 12 | 2 3/4" - 16 UN | 30 | 10,9 | RC-1512 |
| 50,8 | 41,4 | 25 | 38 | 9 | 1" - 8 UN | 25 | 48 | 3/8" - 16 UN | 12 | 2 3/4" - 16 UN | 30 | 11,8 | RC-1514 |
| 65,0 | 57,2 | 25 | 50 | 10 | 1 1/2" - 16 UN | 25 | 58 | 1/2" - 13 UN | 19 | 3 5/16" - 12 UN | 49 | 5,9 | RC-251 |
| 65,0 | 57,2 | 25 | 50 | 10 | 1 1/2" - 16 UN | 25 | 58 | 1/2" - 13 UN | 19 | 3 5/16" - 12 UN | 49 | 6,4 | RC-252 ¹⁾ |
| 65,0 | 57,2 | 25 | 50 | 10 | 1 1/2" - 16 UN | 25 | 58 | 1/2" - 13 UN | 19 | 3 5/16" - 12 UN | 49 | 8,2 | RC-254 ¹⁾ |
| 65,0 | 57,2 | 25 | 50 | 10 | 1 1/2" - 16 UN | 25 | 58 | 1/2" - 13 UN | 19 | 3 5/16" - 12 UN | 49 | 10,0 | RC-256 ¹⁾ |
| 65,0 | 57,2 | 25 | 50 | 10 | 1 1/2" - 16 UN | 25 | 58 | 1/2" - 13 UN | 19 | 3 5/16" - 12 UN | 49 | 12,2 | RC-258 |
| 65,0 | 57,2 | 25 | 50 | 10 | 1 1/2" - 16 UN | 25 | 58 | 1/2" - 13 UN | 19 | 3 5/16" - 12 UN | 49 | 14,1 | RC-2510 |
| 65,0 | 57,2 | 25 | 50 | 10 | 1 1/2" - 16 UN | 25 | 58 | 1/2" - 13 UN | 19 | 3 5/16" - 12 UN | 49 | 16,3 | RC-2512 |
| 65,0 | 57,2 | 25 | 50 | 10 | 1 1/2" - 16 UN | 25 | 58 | 1/2" - 13 UN | 19 | 3 5/16" - 12 UN | 49 | 17,7 | RC-2514 ¹⁾ |
| 73,2 | 57,2 | 57 | 50 | 10 | 1 1/2" - 16 UN | 25 | — | — | — | 3 5/16" - 12 UN | 49 | 18,1 | RC-308 |
| 95,2 | 79,5 | 33 | 71 | 2 | — | — | 95 | 1/2" - 13 UN | 19 | 5" - 12 UN | 55 | 15,0 | RC-502 |
| 95,2 | 79,5 | 33 | 71 | 2 | — | — | 95 | 1/2" - 13 UN | 19 | 5" - 12 UN | 55 | 19,1 | RC-504 |
| 95,2 | 79,5 | 35 | 71 | 2 | — | — | 95 | 1/2" - 13 UN | 19 | 5" - 12 UN | 55 | 23,1 | RC-506 ¹⁾ |
| 95,2 | 79,5 | 35 | 71 | 2 | — | — | 95 | 1/2" - 13 UN | 19 | 5" - 12 UN | 55 | 37,6 | RC-5013 |
| 114,3 | 95,2 | 30 | 71 | 5 | — | — | — | — | — | 5 3/4" - 12 UN | 44 | 29,5 | RC-756 |
| 114,3 | 95,2 | 30 | 71 | 5 | — | — | — | — | — | 5 3/4" - 12 UN | 44 | 59,0 | RC-7513 |
| 130,3 | 104,9 | 41 | 71 | 2 | — | — | 140 | 3/4" - 10 UN | 25 | 6 7/8" - 12 UN | 44 | 59,0 | RC-1006 |
| 130,3 | 104,9 | 41 | 71 | 2 | — | — | 140 | 3/4" - 10 UN | 25 | 6 7/8" - 12 UN | 44 | 72,6 | RC-10010 |

Accessories for RC-Series Cylinders

▼ SELECTION CHART

| For use with Cylinder Capacity ton (kN) | Saddles | | | Base Plate | Mounting Block | Clevis Eyes | |
|--------------------------------------------|-------------------------------------------|-----------------------|----------------------|---------------------|-------------------------------------------------------------------|---------------------|----------------------|
| | Flat | Grooved ¹⁾ | Tilt | | | Base ⁴⁾ | Plunger |
| 5 (45) | A-53F ²⁾ | A-53G ²⁾ | - | - | RB-5 ²⁾ , AW-51 ²⁾ , AW-53 ²⁾ | REB-5 ²⁾ | REP-5 ²⁾ |
| 10 (101) | A-12 ³⁾ , A-102F ³⁾ | A-102G ³⁾ | CAT-10 ³⁾ | JB-10 ³⁾ | RB-10, AW-102 | REB-10 | REP-10 ³⁾ |
| 15 (142) | - | A-152G | CAT-10 | - | RB-15 | REB-15 | REP-10 |
| 25 (232) | A-29 ⁵⁾ | A-252G | CAT-50 | JB-25 | RB-25 | REB-25 | REP-25 |
| 30 (295) | A-29 ⁵⁾ | A-252G | CAT-50 | - | RB-25 | - | REP-25 |
| 50 (498) | - | - | CAT-100 | JB-50 | - | - | - |
| 75 (718) | - | - | CAT-100 | - | - | - | - |
| 95 (933) | - | - | CAT-100 | - | - | - | - |

¹⁾ Standard on 5-30 ton RC-cylinders ²⁾ Except RC-50 ³⁾ Except RC-101 ⁴⁾ Mounting screws are included. ⁵⁾ Used with Bender Sets.

▼ DIMENSION CHARTS

| Model Number | Saddle Dimensions (mm) | | | A-53F, A-102F A-12, A-29 | Model Number | Tilt Saddle Dimensions (mm) | | | Diagram |
|--------------|------------------------|----|---------------|-----------------------------|--------------|-----------------------------|----|----|---------|
| | A | B | C | | | A | B | C | |
| | Flat | | | | | Tilt | | | |
| A-53F | 25 | 6 | 17 | | CAT-10 | 35 | 20 | 22 | |
| A-102F | 35 | 6 | 22 | | CAT-50 | 50 | 23 | 35 | |
| A-12 | 51 | 48 | 1"-8 UNC | | | | | | |
| A-29 | 51 | 48 | 1 1/2"-16 UNC | | | | | | |
| | Grooved | | | | | Tilt | | | |
| A-53G | 25 | 6 | 17 | | CAT-100 | 71 | 24 | - | |
| A-102G | 35 | 6 | 22 | | | | | | |
| A-152G | 38 | 9 | 22 | | | | | | |
| A-252G | 50 | 9 | 35 | | | | | | |

| Model Number | Base Plate Dimensions (mm) | | | | | Diagram |
|--------------|----------------------------|-----|-----|-----|----|---------|
| | A | B | C | D | E | |
| JB-10 | 228 | 228 | 135 | 58 | 20 | |
| JB-25 | 279 | 279 | 140 | 86 | 26 | |
| JB-50 | 304 | 15 | 95 | 131 | 31 | |

| Model Number | Mounting Block Dimensions (mm) | | | | | | | | Diagram |
|--------------|--------------------------------|-----|-----|----|----|----|-------------|----|---------|
| | A | B | C | D | E | F | G | H | |
| RB-5 | 1 1/2"-16UN | 88 | 76 | - | 25 | - | - | - | |
| AW-51 | 1 1/2"-16UN | 70 | 59 | 10 | 24 | 54 | 1/4"-16 UN | 41 | |
| AW-53 | 1 1/2"-16UN | 72 | 7 | 7 | 19 | 57 | 1/4"-20 UN | 10 | |
| RB-10 | 2 1/4"-14UN | 114 | 88 | - | 25 | - | - | - | |
| AW-102 | 2 1/4"-14UN | 100 | 82 | 16 | 30 | 76 | 7/16"-20 UN | 58 | |
| RB-15 | 2 3/4"-16UN | 101 | 114 | - | 38 | - | - | - | |
| RB-25 | 3 5/16"-12UN | 127 | 165 | - | 50 | - | - | - | |

| Type | Model Number | Clevis Eye Dimensions (mm) | | | | | | Pin-to-Pin * (mm) | Diagram |
|--------------------|--------------|----------------------------|----|----|----|----|----|-------------------|---------|
| | | A | B | C | D | E | F | | |
| Base ⁴⁾ | REB-5 | 44 | 47 | 14 | 16 | 16 | 25 | 60,2 | |
| | REB-10 | 63 | 66 | 25 | 22 | 25 | 35 | 78,0 | |
| | REB-15 | 76 | 66 | 25 | 22 | 25 | 35 | 78,0 | |
| | REB-25 | 95 | 79 | 38 | 31 | 31 | 41 | 87,6 | |
| Plunger | REP-5 | 28 | 45 | 14 | 16 | 16 | 19 | - | |
| | REP-10 | 42 | 61 | 25 | 22 | 25 | 28 | - | |
| | REP-25 | 57 | 71 | 38 | 31 | 31 | 35 | - | |

⁴⁾ Mounting screws are included.

* Pin to Pin – REB and REP Clevises fitted. Add cylinder collapsed height.

The Enerpac Lightweight Aluminium Cylinders

▼ From left to right: RAC, RACL, RACH, RAR



- **Lightweight, easy to carry and position to allow a higher cylinder capacity-to-weight-ratio**
- **Non-corrosive by design, aluminium has always been a good material for use in many caustic environments**
- **Composite Bearings on all moving surfaces guarantee no metal-to-metal contact, to resist side loads and increase cylinder life.**



RA Series

Capacity:
20 - 150 ton

Stroke:
50 - 250 mm

Maximum Operating Pressure:
700 bar



Think Safety

Manufacturer's rating of load and stroke are maximum safe limits.

Good practice encourages using only 80% of these ratings.

Page: **264**



Aluminium versus Steel

Aluminium cylinders, while offering the most lightweight solution, also have some unique limitations due to material properties. It differs from steel in that it has a lower finite fatigue life. Aluminium cylinders should **NOT** be used in high-cycle applications such as production.

The Enerpac line of aluminium cylinders are designed to provide 5000 cycles at their recommended pressure. **This limit should not be exceeded.** In normal lifting and many maintenance applications, this should provide a lifetime of use.



Steel Base Plate

The steel base plate protects the cylinder from damage, it should not be removed.

The base holes in these aluminium cylinders are designed for securing the steel base plate. **They will not withstand the capacity of the cylinder.** Do not use the base holes in these aluminium cylinders to attach any device to the cylinder.

RAC-Series, Aluminium Cylinders

▼ Shown from left to right: RAC-5010, RAC-15010, RAC-304, RAC-208



Lightweight for Maximum Portability



Saddles

All RAC-cylinders are equipped with bolt-on removable hardened steel saddles. For Tilt Saddles see next page.

Page: **13**



Lightweight Hand Pumps

The Enerpac composite lightweight hand pumps P-392 or P-802 make the optimal lightweight set.

Page: **72**

- Composite bearings prevent metal-to-metal contact, increasing cylinder life and resistance to side-loads of up to 10%
- Hard-Coat finish on all surfaces resists damage and extends cylinder life
- Handles included on all models
- Steel base plate and saddle for protection against load-induced damage
- Integral stop ring prevents plunger over-travel and is capable of withstanding the full cylinder capacity
- High strength return spring for rapid cylinder retraction
- CR-400 coupler and dustcap included on all models
- All cylinders meet ASME B-30.1 and ISO 10100 standards.

| Cylinder Capacity @ 700 bar ton (kN) | Stroke (mm) | Model Number | Cylinder Effective Area (cm ²) |
|-----------------------------------------|----------------|--------------|-----------------------------------------------|
| 20 (218) | 50 | RAC-202 | 31,2 |
| | 100 | RAC-204 | 31,2 |
| | 150 | RAC-206 | 31,2 |
| | 200 | RAC-208 | 31,2 |
| | 250 | RAC-2010 | 31,2 |
| 30 (309) | 50 | RAC-302 | 44,2 |
| | 100 | RAC-304 | 44,2 |
| | 150 | RAC-306 | 44,2 |
| | 200 | RAC-308 | 44,2 |
| | 250 | RAC-3010 | 44,2 |
| 50 (496) | 50 | RAC-502 | 70,9 |
| | 100 | RAC-504 | 70,9 |
| | 150 | RAC-506 | 70,9 |
| | 200 | RAC-508 | 70,9 |
| | 250 | RAC-5010 | 70,9 |
| 100 (1002) | 50 | RAC-1002 | 143,1 |
| | 100 | RAC-1004 | 143,1 |
| | 150 | RAC-1006 | 143,1 |
| | 200 | RAC-1008 | 143,1 |
| | 250 | RAC-10010 | 143,1 |
| 150 (1589) | 50 | RAC-1502 | 227,0 |
| | 100 | RAC-1504 | 227,0 |
| | 150 | RAC-1506 | 227,0 |
| | 200 | RAC-1508 | 227,0 |
| | 250 | RAC-15010 | 227,0 |



◀ The unique Enerpac RA-Series cylinders – lightweight and made of aluminium alloy – these RAC-506 cylinders are ideal for the positioning of tunnel elements under the river (High Speed Train Line, The Netherlands).

Single-Acting, Aluminium Cylinders

| Optional Bolt-on Tilt Saddle Dimensions (mm) | | | |
|----------------------------------------------|----------------------------|-------------------------|-----------------------------------|
| For Cylinder Model / Capacity ton | Tilt Saddle * Model Number | Tilt Saddle Diameter J1 | Saddle Protrusion from Plunger K1 |
| RAC-50 | CATG-50 | 50 | 24 |
| RAC-100 | CATG-150 | 91 | 31 |
| RAC-150 | CATG-200 | 118 | 35 |

* Tilt saddles not available for less than 50 ton.

RAC Series



Capacity:

20 - 150 ton

Stroke:


50 - 250 mm

Maximum Operating Pressure:

700 bar

| Steel Base Plate Mounting Holes | | | |
|---------------------------------|--------------------|---------------|-----------------------------------|
| Cylinder Model / Capacity ton | Bolt Circle U (mm) | Thread V (mm) | Thread Depth ¹⁾ Z (mm) |
| RAC-20 | 70 | M6 | 12 |
| RAC-30 | 80 | M6 | 12 |
| RAC-50 | 110 | M6 | 12 |
| RAC-100 | 150 | M10 | 12 |
| RAC-150 | 200 | M10 | 12 |

¹⁾ Including Base Plate Height of 6 mm and four (4) base plate bolts M6.

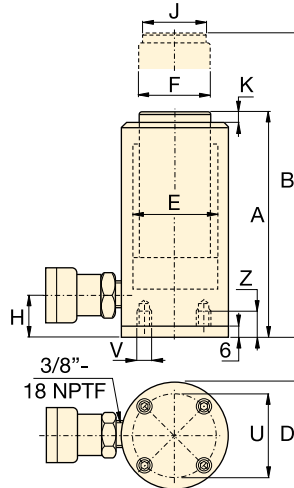

| Oil Capacity (cm ³) | Collapsed Height A (mm) | Extended Height B (mm) | Outside Diameter D (mm) | Cylinder Bore Diameter E (mm) | Plunger Diameter F (mm) | Bottom to Advance Port H (mm) | Saddle Diameter J (mm) | Saddle Protrusion from Plunger K (mm) | Weight (kg) | Model Number |
|---------------------------------|-------------------------|------------------------|-------------------------|-------------------------------|-------------------------|-------------------------------|------------------------|---------------------------------------|-------------|--------------|
| 156 | 174 | 224 | 85 | 63 | 50 | 27 | 40 | 3 | 3,6 | RAC-202 |
| 312 | 224 | 324 | 85 | 63 | 50 | 27 | 40 | 3 | 4,1 | RAC-204 |
| 468 | 274 | 424 | 85 | 63 | 50 | 27 | 40 | 3 | 4,6 | RAC-206 |
| 624 | 324 | 524 | 85 | 63 | 50 | 27 | 40 | 3 | 5,1 | RAC-208 |
| 780 | 374 | 624 | 85 | 63 | 50 | 27 | 40 | 3 | 5,6 | RAC-2010 |
| 221 | 181 | 231 | 100 | 75 | 60 | 32 | 40 | 3 | 4,5 | RAC-302 |
| 442 | 231 | 331 | 100 | 75 | 60 | 32 | 40 | 3 | 5,2 | RAC-304 |
| 663 | 281 | 431 | 100 | 75 | 60 | 32 | 40 | 3 | 5,9 | RAC-306 |
| 884 | 331 | 531 | 100 | 75 | 60 | 32 | 40 | 3 | 6,6 | RAC-308 |
| 1105 | 381 | 631 | 100 | 75 | 60 | 32 | 40 | 3 | 7,3 | RAC-3010 |
| 354 | 186 | 236 | 130 | 95 | 80 | 30 | 50 | 3 | 8,5 | RAC-502 |
| 709 | 236 | 336 | 130 | 95 | 80 | 30 | 50 | 3 | 9,8 | RAC-504 |
| 1063 | 286 | 436 | 130 | 95 | 80 | 30 | 50 | 3 | 11,1 | RAC-506 |
| 1417 | 336 | 536 | 130 | 95 | 80 | 30 | 50 | 3 | 12,4 | RAC-508 |
| 1771 | 386 | 636 | 130 | 95 | 80 | 30 | 50 | 3 | 13,7 | RAC-5010 |
| 715 | 221 | 271 | 180 | 135 | 110 | 46 | 94 | 3 | 17,3 | RAC-1002 |
| 1431 | 271 | 371 | 180 | 135 | 110 | 46 | 94 | 3 | 19,6 | RAC-1004 |
| 2147 | 321 | 471 | 180 | 135 | 110 | 46 | 94 | 3 | 21,9 | RAC-1006 |
| 2863 | 371 | 571 | 180 | 135 | 110 | 46 | 94 | 3 | 24,2 | RAC-1008 |
| 3578 | 421 | 671 | 180 | 135 | 110 | 46 | 94 | 3 | 26,5 | RAC-10010 |
| 1135 | 243 | 293 | 230 | 170 | 140 | 51 | 113 | 3 | 25,3 | RAC-1502 |
| 2270 | 293 | 393 | 230 | 170 | 140 | 51 | 113 | 3 | 29,3 | RAC-1504 |
| 3405 | 343 | 493 | 230 | 170 | 140 | 51 | 113 | 3 | 33,3 | RAC-1506 |
| 4540 | 393 | 593 | 230 | 170 | 140 | 51 | 113 | 3 | 37,3 | RAC-1508 |
| 5675 | 443 | 693 | 230 | 170 | 140 | 51 | 113 | 3 | 41,3 | RAC-15010 |

RACL-Series, Aluminium Lock Nut Cylinders

▼ Shown from left to right: RACL-1006, RACL-504, RACL-5010



- Aluminium Lock Nut provides mechanical load holding for extended periods
- Hardened steel stop ring increasing cylinder life and resistance to side-loads of up to 5%
- Hard-Coat finish on all surfaces resists damage and extends cylinder life
- Composite bearings increase cylinder life and side load resistance
- Handles included on all models
- Steel base plate and saddle for protection against load-induced damage
- Integral stop ring prevents plunger over-travel and is capable of withstanding the full cylinder capacity
- High strength return spring for rapid cylinder retraction
- CR-400 coupler and dustcap included on all models
- All cylinders meet ASME B-30.1 and ISO 10100 standards.



◀ The portable lock nut cylinder RACL-1506 used for extended load supports during epoxy injection for bridge reinforcement.



Saddles

All RACL-cylinders are equipped with bolt-on removable hardened steel saddles. For Tilt Saddles see next page.

Page: 15



Hoses

Enerpac offers a complete line of high quality hydraulic hoses. To ensure the integrity of your system, specify only Enerpac hydraulic hoses.

Page: 122

| Cylinder Capacity @ 700 bar ton (kN) | Stroke (mm) | Model Number | Cylinder Effective Area (cm ²) |
|-----------------------------------------|----------------|--------------|-----------------------------------------------|
| 20 (218) | 50 | RACL-202 | 31,2 |
| | 100 | RACL-204 | 31,2 |
| | 150 | RACL-206 | 31,2 |
| | 200 | RACL-208 | 31,2 |
| | 250 | RACL-2010 | 31,2 |
| 30 (309) | 50 | RACL-302 | 44,2 |
| | 100 | RACL-304 | 44,2 |
| | 150 | RACL-306 | 44,2 |
| | 200 | RACL-308 | 44,2 |
| | 250 | RACL-3010 | 44,2 |
| 50 (496) | 50 | RACL-502 | 70,9 |
| | 100 | RACL-504 | 70,9 |
| | 150 | RACL-506 | 70,9 |
| | 200 | RACL-508 | 70,9 |
| | 250 | RACL-5010 | 70,9 |
| 100 (1002) | 50 | RACL-1002 | 143,1 |
| | 100 | RACL-1004 | 143,1 |
| | 150 | RACL-1006 | 143,1 |
| | 200 | RACL-1008 | 143,1 |
| | 250 | RACL-10010 | 143,1 |
| 150 (1589) | 50 | RACL-1502 | 227,0 |
| | 100 | RACL-1504 | 227,0 |
| | 150 | RACL-1506 | 227,0 |
| | 200 | RACL-1508 | 227,0 |
| | 250 | RACL-15010 | 227,0 |


Single-Acting, Aluminium Lock Nut Cylinders

| Optional Bolt-on Tilt Saddle Dimensions (mm) | | | | |
|----------------------------------------------|----------------------------|-------------------------|-----------------------------------|--|
| For Cylinder Model / Capacity ton | Tilt Saddle * Model Number | Tilt Saddle Diameter J1 | Saddle Protrusion from Plunger K1 | |
| RACL-50 | CATG-50 | 50 | 24 | |
| RACL-100 | CATG-150 | 91 | 31 | |
| RACL-150 | CATG-200 | 118 | 35 | |


* Tilt saddles not available for less than 50 ton.

| Steel Base Plate Mounting Holes | | | |
|---------------------------------|--------------------|---------------|-----------------------------------|
| Cylinder Model / Capacity ton | Bolt Circle U (mm) | Thread V (mm) | Thread Depth ¹⁾ Z (mm) |
| RACL-20 | 70 | M6 | 12 |
| RACL-30 | 80 | M6 | 12 |
| RACL-50 | 110 | M6 | 12 |
| RACL-100 | 150 | M10 | 12 |
| RACL-150 | 200 | M10 | 12 |

¹⁾ Including Base Plate Height of 6 mm and four (4) base plate bolts M6.

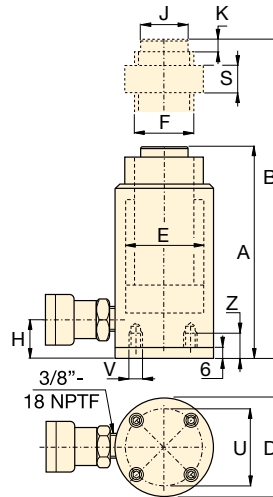

RACL Series



Capacity:

20 - 150 ton

Stroke:

50 - 250 mm

Maximum Operating Pressure:

700 bar

| Oil Capacity (cm ³) | Collapsed Height A (mm) | Extended Height B (mm) | Outside Diameter D (mm) | Cylinder Bore Diameter E (mm) | Plunger Diameter (Threaded) F (mm) | Bottom to Advance Port H (mm) | Saddle Diameter J (mm) | Saddle Protrusion from Plunger K (mm) | Lock Nut Height S (mm) | Weight (kg) | Model Number |
|---------------------------------|-------------------------|------------------------|-------------------------|-------------------------------|------------------------------------|-------------------------------|------------------------|---------------------------------------|------------------------|-------------|--------------|
| 156 | 224 | 274 | 85 | 63 | Tr 55 x 4 | 27 | 40 | 3 | 50 | 4,0 | RACL-202 |
| 312 | 274 | 374 | 85 | 63 | Tr 55 x 4 | 27 | 40 | 3 | 50 | 4,6 | RACL-204 |
| 468 | 324 | 474 | 85 | 63 | Tr 55 x 4 | 27 | 40 | 3 | 50 | 5,2 | RACL-206 |
| 624 | 374 | 574 | 85 | 63 | Tr 55 x 4 | 27 | 40 | 3 | 50 | 5,8 | RACL-208 |
| 780 | 424 | 674 | 85 | 63 | Tr 55 x 4 | 27 | 40 | 3 | 50 | 6,4 | RACL-2010 |
| 221 | 231 | 281 | 100 | 75 | Tr 60 x 4 | 33 | 40 | 3 | 50 | 5,4 | RACL-302 |
| 442 | 281 | 381 | 100 | 75 | Tr 60 x 4 | 33 | 40 | 3 | 50 | 6,1 | RACL-304 |
| 663 | 331 | 481 | 100 | 75 | Tr 60 x 4 | 33 | 40 | 3 | 50 | 6,8 | RACL-306 |
| 883 | 381 | 581 | 100 | 75 | Tr 60 x 4 | 33 | 40 | 3 | 50 | 7,5 | RACL-308 |
| 1105 | 431 | 681 | 100 | 75 | Tr 60 x 4 | 33 | 40 | 3 | 50 | 8,2 | RACL-3010 |
| 354 | 236 | 286 | 130 | 95 | Tr 80 x 4 | 30 | 50 | 3 | 50 | 9,3 | RACL-502 |
| 709 | 286 | 386 | 130 | 95 | Tr 80 x 4 | 30 | 50 | 3 | 50 | 10,6 | RACL-504 |
| 1063 | 336 | 486 | 130 | 95 | Tr 80 x 4 | 30 | 50 | 3 | 50 | 11,9 | RACL-506 |
| 1417 | 386 | 586 | 130 | 95 | Tr 80 x 4 | 30 | 50 | 3 | 50 | 13,2 | RACL-508 |
| 1771 | 436 | 686 | 130 | 95 | Tr 80 x 4 | 30 | 50 | 3 | 50 | 14,5 | RACL-5010 |
| 716 | 296 | 346 | 180 | 135 | Tr 110 x 6 | 46 | 94 | 3 | 75 | 21,9 | RACL-1002 |
| 1431 | 346 | 446 | 180 | 135 | Tr 110 x 6 | 46 | 94 | 3 | 75 | 24,2 | RACL-1004 |
| 2147 | 396 | 546 | 180 | 135 | Tr 110 x 6 | 46 | 94 | 3 | 75 | 26,5 | RACL-1006 |
| 2863 | 446 | 646 | 180 | 135 | Tr 110 x 6 | 46 | 94 | 3 | 75 | 28,8 | RACL-1008 |
| 3578 | 496 | 746 | 180 | 135 | Tr 110 x 6 | 46 | 94 | 3 | 75 | 31,1 | RACL-10010 |
| 1135 | 323 | 373 | 230 | 170 | Tr 140 x 6 | 51 | 113 | 3 | 80 | 32,2 | RACL-1502 |
| 2270 | 373 | 473 | 230 | 170 | Tr 140 x 6 | 51 | 113 | 3 | 80 | 36,2 | RACL-1504 |
| 3405 | 423 | 573 | 230 | 170 | Tr 140 x 6 | 51 | 113 | 3 | 80 | 40,2 | RACL-1506 |
| 4540 | 473 | 673 | 230 | 170 | Tr 140 x 6 | 51 | 113 | 3 | 80 | 44,2 | RACL-1508 |
| 5675 | 523 | 773 | 230 | 170 | Tr 140 x 6 | 51 | 113 | 3 | 80 | 48,2 | RACL-15010 |

▼ Shown from left to right: RACH-1504, RACH-15010, RACH-206, RACH-306



The Lightweight Solution for Tensioning and Testing



Saddles

All RACH-cylinders are equipped with bolt-on hollow removable saddles of hardened steel.



Lightweight Hand Pumps

The Enerpac composite lightweight hand pumps **P-392** or **P-802** make the optimal lightweight set.

Page: 72

- Hollow plunger design allows for both pull and push forces
- Composite bearings increase cylinder life and sideload resistance
- Hard-Coat finish on all surfaces resists damage and extends cylinder life
- Floating center tube increases seal and product life
- Handles standard on all models
- Steel base plate and saddle for protection against load-induced damage
- Integral stop ring prevents plunger over-travel and is capable of withstanding the full cylinder capacity
- High strength return spring for rapid cylinder retraction
- CR-400 coupler and dustcap included on all models
- All cylinders meet ASME B-30.1 and ISO 10100 standards.



◀ An RACH-306 powered by a P-392 hand pump used to extract corroded carriage pins of refuse collection vehicles.


| Cylinder Capacity @ 700 bar ton (kN) | Stroke (mm) | Model Number | Cylinder Effective Area (cm ²) |
|-----------------------------------------|----------------|--------------|-----------------------------------------------|
| 20 (229) | 50 | RACH-202 | 32,7 |
| | 100 | RACH-204 | 32,7 |
| | 150 | RACH-206 | 32,7 |
| | 200 | RACH-208 | 32,7 |
| | 250 | RACH-2010 | 32,7 |
| 30 (358) | 50 | RACH-302 | 51,1 |
| | 100 | RACH-304 | 51,1 |
| | 150 | RACH-306 | 51,1 |
| | 200 | RACH-308 | 51,1 |
| | 250 | RACH-3010 | 51,1 |
| 60 (596) | 50 | RACH-602 | 84,7 |
| | 100 | RACH-604 | 84,7 |
| | 150 | RACH-606 | 84,7 |
| | 200 | RACH-608 | 84,7 |
| | 250 | RACH-6010 | 84,7 |
| 100 (1157) | 50 | RACH-1002 | 164,6 |
| | 100 | RACH-1004 | 164,6 |
| | 150 | RACH-1006 | 164,6 |
| | 200 | RACH-1008 | 164,6 |
| | 250 | RACH-10010 | 164,6 |
| 150 (1588) | 50 | RACH-1502 | 225,8 |
| | 100 | RACH-1504 | 225,8 |
| | 150 | RACH-1506 | 225,8 |
| | 200 | RACH-1508 | 225,8 |
| | 250 | RACH-15010 | 225,8 |

Single-Acting, Aluminium Hollow Plunger Cylinders


Steel Base Plate Mounting Holes

| Cylinder Model / Capacity ton | Bolt Circle U (mm) | Thread V (mm) | Thread Depth ¹⁾ Z (mm) |
|-------------------------------|--------------------|---------------|-----------------------------------|
| RACH-20 | 80 | M6 | 12 |
| RACH-30 | 110 | M6 | 12 |
| RACH-60 | 160 | M6 | 12 |
| RACH-100 | 220 | M10 | 12 |
| RACH-150 | 245 | M10 | 12 |

¹⁾ Including Base Plate Height of 6 mm and four (4) base plate bolts M6.

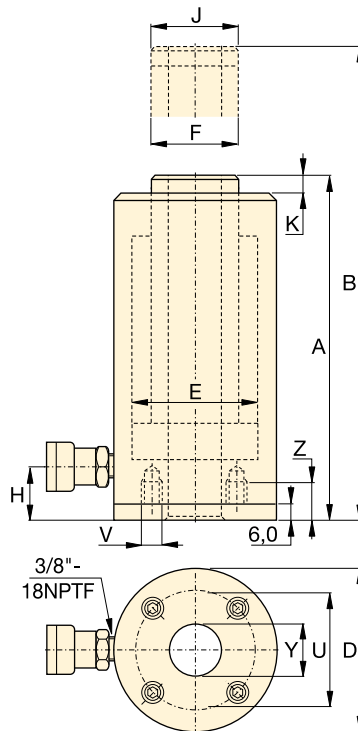

RACH Series



Capacity:

20 - 150 ton

Stroke:

50 - 250 mm

Center Hole Diameter:

27 - 79 mm

Maximum Operating Pressure:

700 bar

| Oil Capacity (cm ³) | Collapsed Height A (mm) | Extended Height B (mm) | Outside Diameter C (mm) | Cylinder Bore Diameter D (mm) | Plunger Diameter E (mm) | Bottom to Advance Port H (mm) | Saddle Diameter G (mm) | Saddle Protrusion from Plunger K (mm) | Center Hole Diameter Y (mm) | Weight (kg) | Model Number |
|---------------------------------|-------------------------|------------------------|-------------------------|-------------------------------|-------------------------|-------------------------------|------------------------|---------------------------------------|-----------------------------|-------------|--------------|
| 164 | 188 | 238 | 100 | 75 | 55 | 29 | 55 | 10 | 27 | 5,2 | RACH-202 |
| 327 | 251 | 351 | 100 | 75 | 55 | 29 | 55 | 10 | 27 | 6,1 | RACH-204 |
| 491 | 315 | 465 | 100 | 75 | 55 | 29 | 55 | 10 | 27 | 7,1 | RACH-206 |
| 654 | 378 | 578 | 100 | 75 | 55 | 29 | 55 | 10 | 27 | 8,0 | RACH-208 |
| 818 | 442 | 692 | 100 | 75 | 55 | 29 | 55 | 10 | 27 | 9,0 | RACH-2010 |
| 256 | 208 | 258 | 130 | 95 | 70 | 29 | 70 | 10 | 34 | 8,0 | RACH-302 |
| 511 | 267 | 367 | 130 | 95 | 70 | 29 | 70 | 10 | 34 | 9,5 | RACH-304 |
| 766 | 333 | 483 | 130 | 95 | 70 | 29 | 70 | 10 | 34 | 11,2 | RACH-306 |
| 1022 | 395 | 595 | 130 | 95 | 70 | 29 | 70 | 10 | 34 | 12,9 | RACH-308 |
| 1277 | 458 | 708 | 130 | 95 | 70 | 29 | 70 | 10 | 34 | 14,5 | RACH-3010 |
| 423 | 251 | 301 | 180 | 130 | 100 | 61 | 100 | 12 | 54 | 16,2 | RACH-602 |
| 847 | 315 | 415 | 180 | 130 | 100 | 61 | 100 | 12 | 54 | 19,5 | RACH-604 |
| 1270 | 380 | 530 | 180 | 130 | 100 | 61 | 100 | 12 | 54 | 25,6 | RACH-606 |
| 1694 | 445 | 645 | 180 | 130 | 100 | 61 | 100 | 12 | 54 | 26,0 | RACH-608 |
| 2117 | 510 | 760 | 180 | 130 | 100 | 61 | 100 | 12 | 54 | 29,6 | RACH-6010 |
| 823 | 258 | 308 | 250 | 185 | 145 | 61 | 145 | 14 | 79 | 33,8 | RACH-1002 |
| 1646 | 325 | 425 | 250 | 185 | 145 | 61 | 145 | 14 | 79 | 39,8 | RACH-1004 |
| 2487 | 391 | 541 | 250 | 185 | 145 | 61 | 145 | 14 | 79 | 46,2 | RACH-1006 |
| 3291 | 459 | 659 | 250 | 185 | 145 | 61 | 145 | 14 | 79 | 52,2 | RACH-1008 |
| 4114 | 527 | 777 | 250 | 185 | 145 | 61 | 145 | 14 | 79 | 58,8 | RACH-10010 |
| 1129 | 280 | 330 | 275 | 205 | 150 | 61 | 145 | 14 | 79 | 48,9 | RACH-1502 |
| 2258 | 360 | 460 | 275 | 205 | 150 | 61 | 145 | 14 | 79 | 55,7 | RACH-1504 |
| 3387 | 430 | 580 | 275 | 205 | 150 | 61 | 145 | 14 | 79 | 63,0 | RACH-1506 |
| 4517 | 500 | 700 | 275 | 205 | 150 | 61 | 145 | 14 | 79 | 70,1 | RACH-1508 |
| 5646 | 570 | 820 | 275 | 205 | 150 | 61 | 145 | 14 | 79 | 77,2 | RACH-15010 |

RAR, Double-Acting Aluminium Cylinders

▼ Shown from left to right: RAR-5010, RAR-308, RAR-204



Saddles

All RAR-cylinders are equipped with bolt-on removable hardened steel saddles.

For Tilt Saddles see next page.

Page: **19**



Hoses

Enerpac offers a complete line of high quality hydraulic hoses. To ensure the integrity of your system, specify only Enerpac hydraulic hoses.

Page: **122**

- Double-acting for rapid retraction, regardless of hose lengths or system losses
- Composite bearings increase cylinder life and sideload resistance
- Hard-Coat finish on all surfaces resists damage and extends cylinder life
- Handles included on all models
- Steel base plate and saddle for protection against load-induced damage
- Integral stop ring prevents plunger over-travel and is capable of withstanding the full cylinder capacity
- Built-in safety valve prevents accidental over-pressurization.

| Cylinder Capacity @ 700 bar ton | Stroke (mm) | Model Number | Max. Cylinder Capacity (kN) Push | Cylinder Effective Area (cm ²) | | Oil Capacity (cm ³) | |
|------------------------------------|----------------|--------------|-------------------------------------|--------------------------------------------|-------|---------------------------------|------|
| | | | | Push | Pull | Push | Pull |
| 20 | 50 | RAR-202 | 218 | 31,2 | 18,6 | 156 | 93 |
| | 100 | RAR-204 | 218 | 31,2 | 18,6 | 312 | 186 |
| | 150 | RAR-206 | 218 | 31,2 | 18,6 | 468 | 279 |
| | 200 | RAR-208 | 218 | 31,2 | 18,6 | 624 | 372 |
| | 250 | RAR-2010 | 218 | 31,2 | 18,6 | 780 | 465 |
| 30 | 50 | RAR-302 | 309 | 44,2 | 24,5 | 221 | 123 |
| | 100 | RAR-304 | 309 | 44,2 | 24,5 | 442 | 245 |
| | 150 | RAR-306 | 309 | 44,2 | 24,5 | 663 | 368 |
| | 200 | RAR-308 | 309 | 44,2 | 24,5 | 884 | 490 |
| | 250 | RAR-3010 | 309 | 44,2 | 24,5 | 1105 | 613 |
| 50 | 50 | RAR-502 | 496 | 70,9 | 26,7 | 354 | 134 |
| | 100 | RAR-504 | 496 | 70,9 | 26,7 | 709 | 267 |
| | 150 | RAR-506 | 496 | 70,9 | 26,7 | 1063 | 401 |
| | 200 | RAR-508 | 496 | 70,9 | 26,7 | 1417 | 534 |
| | 250 | RAR-5010 | 496 | 70,9 | 26,7 | 1771 | 668 |
| 100 | 50 | RAR-1002 | 1002 | 143,1 | 79,5 | 715 | 398 |
| | 100 | RAR-1004 | 1002 | 143,1 | 79,5 | 1431 | 795 |
| | 150 | RAR-1006 | 1002 | 143,1 | 79,5 | 2147 | 1193 |
| | 200 | RAR-1008 | 1002 | 143,1 | 79,5 | 2863 | 1590 |
| | 250 | RAR-10010 | 1002 | 143,1 | 79,5 | 3578 | 1988 |
| 150 | 50 | RAR-1502 | 1589 | 227,0 | 132,0 | 1135 | 660 |
| | 100 | RAR-1504 | 1589 | 227,0 | 132,0 | 2270 | 1320 |
| | 150 | RAR-1506 | 1589 | 227,0 | 132,0 | 3405 | 1980 |
| | 200 | RAR-1508 | 1589 | 227,0 | 132,0 | 4540 | 2640 |
| | 250 | RAR-15010 | 1589 | 227,0 | 132,0 | 5675 | 3300 |

▼ An RAR-506 was easy to position under a bulldozer for repair of frame member.



Double-Acting, Aluminium Cylinders

| Optional Bolt-on Tilt Saddle Dimensions (mm) | | | |
|----------------------------------------------|----------------------------|-------------------------|-----------------------------------|
| For Cylinder Model / Capacity ton | Tilt Saddle * Model Number | Tilt Saddle Diameter J1 | Saddle Protrusion from Plunger K1 |
| RAR-50 | CATG-50 | 50 | 24 |
| RAR-100 | CATG-100 | 73 | 29 |
| RAR-150 | CATG-150 | 91 | 31 |

* Tilt saddles not available for less than 50 ton.

RAR Series




Capacity:
20 - 150 ton

Stroke:
50 - 250 mm

Maximum Operating Pressure:
700 bar

| Steel Base Plate Mounting Holes | | | |
|---------------------------------|--------------------|---------------|-----------------------------------|
| Cylinder Model / Capacity ton | Bolt Circle U (mm) | Thread V (mm) | Thread Depth ¹⁾ Z (mm) |
| RAR-20 | 93 | M6 | 12 |
| RAR-30 | 105 | M6 | 12 |
| RAR-50 | 110 | M6 | 12 |
| RAR-100 | 165 | M6 | 12 |
| RAR-150 | 200 | M6 | 12 |

¹⁾ Including Base Plate Height of 6 mm and four (4) base plate bolts M6.

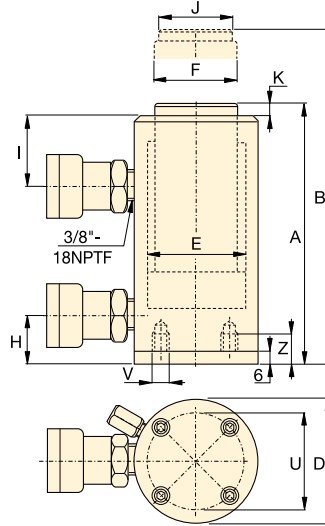

| Collapsed Height A (mm) | Extended Height B (mm) | Outside Diameter D (mm) | Cylinder Bore Diameter E (mm) | Plunger Diameter F (mm) | Bottom to Advance Port H (mm) | Top to Retract Port I (mm) | Saddle Diameter J (mm) | Saddle Protrusion from Plunger K (mm) | (kg) | Model Number |
|-------------------------|------------------------|-------------------------|-------------------------------|-------------------------|-------------------------------|----------------------------|------------------------|---------------------------------------|------|--------------|
| 189 | 239 | 113 | 63 | 40 | 30 | 50 | 30 | 3 | 7,4 | RAR-202 |
| 239 | 339 | 113 | 63 | 40 | 30 | 50 | 30 | 3 | 8,0 | RAR-204 |
| 289 | 439 | 113 | 63 | 40 | 30 | 50 | 30 | 3 | 8,6 | RAR-206 |
| 339 | 539 | 113 | 63 | 40 | 30 | 50 | 30 | 3 | 9,2 | RAR-208 |
| 389 | 639 | 113 | 63 | 40 | 30 | 50 | 30 | 3 | 9,8 | RAR-2010 |
| 201 | 251 | 125 | 75 | 50 | 30 | 55 | 40 | 3 | 8,6 | RAR-302 |
| 251 | 351 | 125 | 75 | 50 | 30 | 55 | 40 | 3 | 9,5 | RAR-304 |
| 301 | 451 | 125 | 75 | 50 | 30 | 55 | 40 | 3 | 10,4 | RAR-306 |
| 351 | 551 | 125 | 75 | 50 | 30 | 55 | 40 | 3 | 11,3 | RAR-308 |
| 401 | 651 | 125 | 75 | 50 | 30 | 55 | 40 | 3 | 12,2 | RAR-3010 |
| 201 | 251 | 145 | 95 | 75 | 30 | 56 | 50 | 3 | 11,1 | RAR-502 |
| 251 | 351 | 145 | 95 | 75 | 30 | 56 | 50 | 3 | 12,7 | RAR-504 |
| 301 | 451 | 145 | 95 | 75 | 30 | 56 | 50 | 3 | 14,3 | RAR-506 |
| 351 | 551 | 145 | 95 | 75 | 30 | 56 | 50 | 3 | 15,9 | RAR-508 |
| 401 | 651 | 145 | 95 | 75 | 30 | 56 | 50 | 3 | 17,5 | RAR-5010 |
| 251 | 301 | 185 | 135 | 90 | 43 | 80 | 75 | 3 | 16,4 | RAR-1002 |
| 301 | 401 | 185 | 135 | 90 | 43 | 80 | 75 | 3 | 19,3 | RAR-1004 |
| 351 | 501 | 185 | 135 | 90 | 43 | 80 | 75 | 3 | 22,2 | RAR-1006 |
| 401 | 601 | 185 | 135 | 90 | 43 | 80 | 75 | 3 | 25,1 | RAR-1008 |
| 451 | 701 | 185 | 135 | 90 | 43 | 80 | 75 | 3 | 28,0 | RAR-10010 |
| 248 | 298 | 230 | 170 | 110 | 38 | 75 | 113 | 3 | 24,2 | RAR-1502 |
| 298 | 398 | 230 | 170 | 110 | 38 | 75 | 113 | 3 | 28,9 | RAR-1504 |
| 348 | 498 | 230 | 170 | 110 | 38 | 75 | 113 | 3 | 33,2 | RAR-1506 |
| 398 | 598 | 230 | 170 | 110 | 38 | 75 | 113 | 3 | 37,9 | RAR-1508 |
| 448 | 698 | 230 | 170 | 110 | 38 | 75 | 113 | 3 | 42,6 | RAR-15010 |

RT-Series, Telescopic Cylinders

▼ RT-2111 Telescopic Cylinder (shown with plunger extended and retracted)



- Nitrocarburized surface treatment inside and out provides corrosion protection
- 3% side-load of full capacity
- Double or triple wear bearings support lifting stages
- Tilting saddles with 5 degrees of maximum tilt standard on all models
- Design Safety factor complies with ASME B30.1 & EN1494
- Certified lifting eyes for safe handling and positioning
- CR-400 coupler for compatibility with standard product
- Steel cylinder base for maximum strength.

Moving a load a greater distance



RT-Series, Multi-Stage Cylinders

Enerpac compact, multi-stage telescopic cylinders are available with two or three pistons, and can lift loads up to 600 mm in a single movement.

Nitrocarburized surface treatment inside and out provides unparalleled sideload resistance and corrosion protection for safe use in the harshest conditions. The longer stroke length of telescopic cylinders will save you time and simplify projects by moving a load a greater distance and eliminating the use of temporary cribbing.



Tilt Saddles


All RT-Series cylinders include integral tilt saddles with maximum tilt angles up to 5 degree.



◀ *The longer stroke length of telescopic cylinders will save you time and simplify projects by moving a load a greater distance and eliminating the use of temporary cribbing.*

| Cylinder Capacity at Maximum Stroke ton (kN) | Maximum Stroke (mm) | Model Number | Collapsed Height (mm) | Extended Height (mm) |
|-------------------------------------------------|------------------------|--------------|--------------------------|-------------------------|
| 14,0 (137) | 270 | RT-1510 | 283 | 553 |
| | 435 | RT-1817 | 345 | 780 |
| 20,2 (198) | 300 | RT-2111 | 317 | 617 |
| | 500 | RT-2119 | 395 | 895 |
| 31,5 (309) | 300 | RT-3311 | 352 | 652 |
| | 600 | RT-3323 | 476 | 1076 |

Multi-Stage Telescopic Cylinders, Single-Acting, Load Return

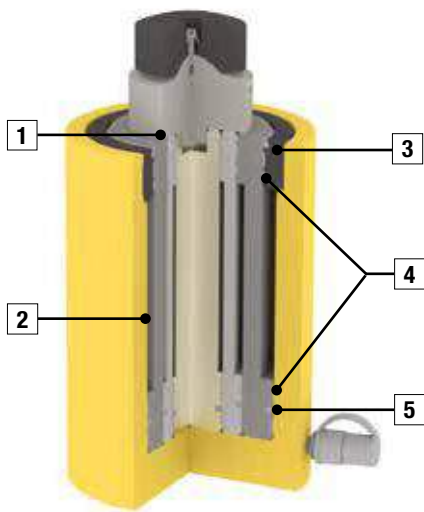

- 1 **Wiper Ring** on each stage to minimize contamination.
- 2 **Nitrocarburized Coating** for maximum corrosion protection and surface hardness. Exterior in nitrided and Enerpac yellow epoxy.
- 3 **Stop Ring** full load capable to prevent plunger overstroke.
- 4 **Wear Bearings**. Double or triple wear bearings for maximum sideload capability and wear resistance.
- 5 **Seals** for maximum compliance and high wear resistance.




RT Series



Capacity:
14 - 31,5 ton

Stroke:
270 - 600 mm

Maximum Operating Pressure:
700 bar

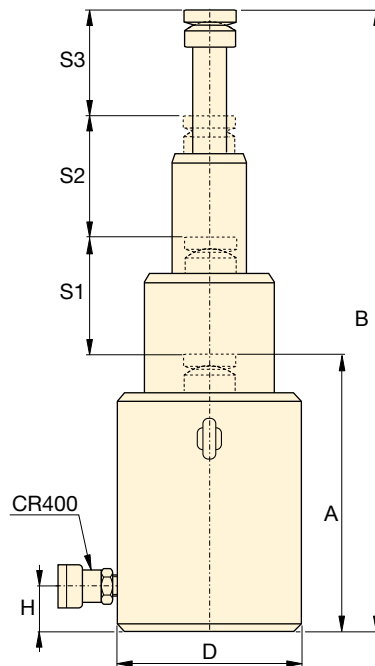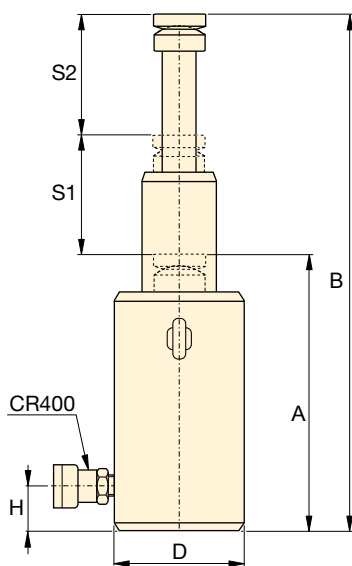

Multi-Stage Cylinders

- 1st Stage:** maximum load capacity at lowest maximum stroke
- 2nd Stage:** extended stroke but at lower maximum capacity than the 1st stage
- Final Stage:** maximum stroke extension but lowest maximum capacity.



Hoses

Enerpac offers a complete line of high quality hydraulic hoses. To ensure the integrity of your system, specify only Enerpac

hydraulic hoses.

Page: 122

| Oil Capacity (cm ³) | 1st Stage | | 2nd Stage | | 3rd Stage | | Outside Diameter D (mm) | Bottom to Advance Port H (mm) | Saddle Diameter J (mm) | Saddle Height K (mm) | Saddle Support Diameter L (mm) | Model Number | |
|------------------------------------|----------------------|-------------------|----------------------|-------------------|----------------------|-------------------|----------------------------|----------------------------------|---------------------------|-------------------------|-----------------------------------|--------------|---------|
| | Capacity ton (kN) | Stroke S1 (mm) | Capacity ton (kN) | Stroke S2 (mm) | Capacity ton (kN) | Stroke S3 (mm) | | | | | | | |
| 944 | 36 (352) | 135 | 14 (137) | 135 | - | - | 110 | 20 | 60 | 49 | 60 | 15,1 | RT-1510 |
| 3092 | 95 (929) | 145 | 41 (397) | 145 | 17,0 (166) | 145 | 170 | 27 | 80 | 73 | 85 | 40,3 | RT-1817 |
| 1487 | 51 (496) | 150 | 20 (198) | 150 | - | - | 125 | 23 | 60 | 53 | 66 | 21,8 | RT-2111 |
| 4661 | 126 (1237) | 170 | 51 (496) | 170 | 20,2 (198) | 160 | 200 | 34 | 90 | 83 | 100 | 67,3 | RT-2119 |
| 2359 | 81 (792) | 150 | 32 (309) | 150 | - | - | 160 | 25 | 80 | 66 | 89 | 39,9 | RT-3311 |
| 8816 | 202 (1985) | 200 | 81 (792) | 200 | 31,5 (309) | 200 | 250 | 44 | 110 | 111 | 123 | 124,0 | RT-3323 |

▼ Shown from left to right: RSM-1000, RSM-300, RSM-50, RCS-1002, RCS-302



Maximum Power-to-Height Ratio



Saddles

All RCS-Series cylinders have plunger mounting holes for installation of tilt saddles. See table for selection and dimensional information.

Page: **23**



Low Clearance Lifting

The LW-16 Lifting Wedge and SOH-Series Machine Lifts are the perfect choice for lifting the first few millimeters.

Page: **172**

RSM-series, Flat-Jac® Cylinders

- Compact, flat design for use where most other cylinders will not fit
- Single-acting, spring return
- RSM-750, 1000 and 1500 have handles for easy carrying
- Mounting holes permit easy fixturing
- Baked enamel finish for increased corrosion resistance
- CR-400 coupler and dust cap included on all models¹⁾
- Hard chrome plated high quality steel plungers
- Grooved plunger ends require no saddle.

RCS-series, Low-Height Cylinders

- Lightweight, low profile design for use in confined spaces
- Single-acting, spring return
- Baked enamel finish for increased corrosion resistance
- Plunger wiper reduces contamination, extending cylinder life
- CR-400 coupler and dust cap included on all models
- Grooved plunger end with threaded holes for mounting tilt saddles
- Integral handle on RCS-1002 for easy carrying
- Plated steel plungers.

▼ Only a couple of centimeters will do for an RSM-cylinder to lift a large construction.




| Cyl. Capacity | Stroke | Model Number | Cylinder Effective Area | Oil Capacity |
|---------------|--------|----------------------|-------------------------|--------------------|
| ton (kN) | (mm) | | (cm ²) | (cm ³) |
| 5 (45) | 6 | RSM-50 ¹⁾ | 6,5 | 4 |
| 10 (101) | 11 | RSM-100 * | 14,5 | 18 |
| 20 (201) | 11 | RSM-200 * | 28,7 | 32 |
| 30 (295) | 13 | RSM-300 * | 42,1 | 55 |
| 45 (435) | 16 | RSM-500 * | 62,1 | 99 |
| 75 (718) | 16 | RSM-750 | 102,6 | 164 |
| 90 (887) | 16 | RSM-1000 | 126,7 | 203 |
| 150 (1386) | 16 | RSM-1500 | 198,1 | 317 |
| 10 (101) | 38 | RCS-101 * | 14,5 | 55 |
| 20 (201) | 45 | RCS-201 * | 28,7 | 129 |
| 30 (295) | 62 | RCS-302 * | 42,1 | 261 |
| 45 (435) | 60 | RCS-502 * | 62,1 | 373 |
| 90 (887) | 57 | RCS-1002 * | 126,7 | 722 |

¹⁾ RSM-50 is fitted with an AR-400 coupler.

* Available as set, see note on next page.

Single-Acting, Low-Height Cylinders



Cylinder-Pump Sets

All cylinders marked with an * are available as (cylinder, gauge, couplers, hose and pump) for your ordering convenience.

Page: **58**

RSM, RCS Series



Capacity:

5 - 150 ton

Stroke:


6 - 62 mm

Maximum Operating Pressure:


700 bar

Optional Bolt On Tilt Saddle Dimensions (mm)

| For Cylinder Model: | Model Number | A | B | C* |
|---------------------|--------------|----|----|----|
| RCS-101 | CAT-11 | 35 | 11 | 21 |
| RCS-201, -302, -502 | CAT-51 | 50 | 15 | 29 |
| RCS-1002 | CAT-101 | 71 | 17 | 35 |



* 'C' dimension equals saddle protrusion from plunger. Mounting screws are included.

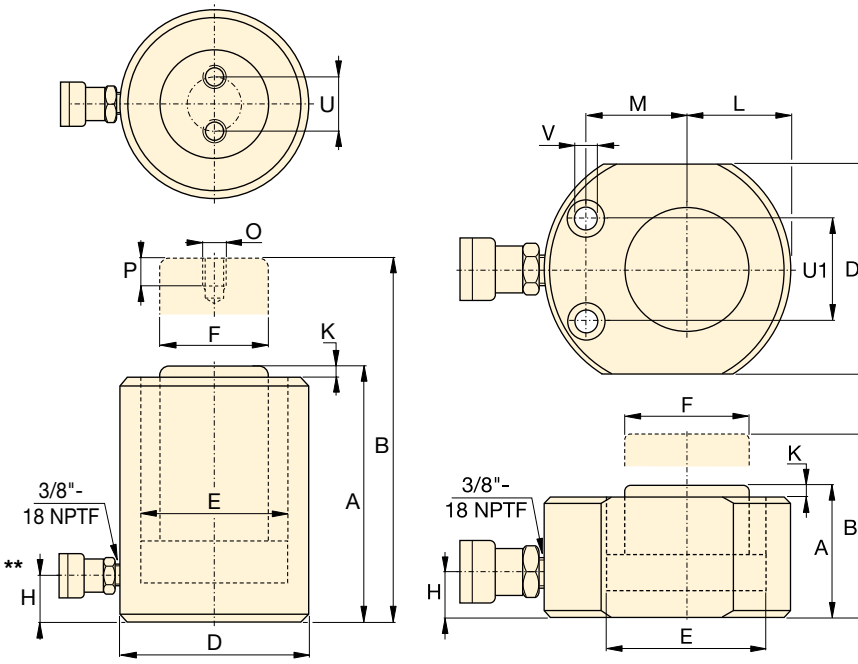

RCS-Series

RSM-Series



Power Box

Tool box with hand pump, gauge adaptor assembly, hose and RSM or RCS-cylinders.

Page: **61**

RSM Cylinder Mounting Hole Dimensions (mm)

| Model Number | Bolt Circle U1 | Hole Dia. V | Counter Bore Dia. | Counter Bore Depth |
|--------------|----------------|-------------|-------------------|--------------------|
| RSM-50 | 28,5 | 5,5 | 9,1 | 4,3 |
| RSM-100 | 36,6 | 7,1 | 10,7 | 7,9 |
| RSM-200 | 49,3 | 10,0 | 15,1 | 9,9 |
| RSM-300 | 52,3 | 10,0 | 15,9 | 11,2 |
| RSM-500 | 66,5 | 11,0 | 19,0 | 12,7 |
| RSM-750 | 76,2 | 13,5 | 20,6 | 14,2 |
| RSM-1000 | 76,2 | 13,5 | 20,6 | 14,2 |
| RSM-1500 | 117,3 | 13,5 | 20,6 | 14,2 |

| Collapsed Height | Extended Height | Outside Diameter | Cylinder Bore Dia. | Plunger Dia. | Base to Advance Port | Plunger Protrusion from Base | Plunger to Base | Plunger to Mtg. Hole | Thread | Thread Depth | Bolt Circle | Weight | Model Number |
|------------------|-----------------|------------------|--------------------|--------------|----------------------|------------------------------|-----------------|----------------------|--------|--------------|-------------|--------|----------------------|
| A (mm) | B (mm) | D (mm) | E (mm) | F (mm) | H (mm) | K (mm) | L (mm) | M (mm) | O (mm) | P (mm) | U (mm) | (kg) | |
| 32 | 38 | 58 x 41 | 28,7 | 25,4 | 16 | 1 | 20 | 22 | - | - | - | 1,0 | RSM-50 ¹⁾ |
| 43 | 54 | 82 x 55 | 42,9 | 38,1 | 19 | 1 | 27 | 34 | - | - | - | 1,4 | RSM-100 * |
| 51 | 62 | 101 x 76 | 60,5 | 50,8 | 19 | 1 | 39 | 39 | - | - | - | 3,1 | RSM-200 * |
| 58 | 71 | 117 x 95 | 73,2 | 63,4 | 19 | 2 | 47 | 44 | - | - | - | 4,5 | RSM-300 * |
| 66 | 82 | 140 x 114 | 88,9 | 69,8 | 19 | 2 | 57 | 53 | - | - | - | 6,8 | RSM-500 * |
| 79 | 95 | 165 x 139 | 114,3 | 82,6 | 19 | 2 | 69 | 66 | - | - | - | 11,3 | RSM-750 |
| 85 | 101 | 178 x 153 | 127,0 | 92,2 | 19 | 2 | 76 | 74 | - | - | - | 14,5 | RSM-1000 |
| 100 | 116 | 215 x 190 | 158,8 | 114,3 | 23 | 2 | 95 | 82 | - | - | - | 26,3 | RSM-1500 |
| 88 | 126 | 69 | 42,9 | 38,1 | 17 | 5 | - | - | M4 | 8 | 26 | 2,7 | RCS-101 * |
| 98 | 143 | 92 | 60,5 | 50,8 | 17 | 3 | - | - | M5 | 8 | 40 | 5,0 | RCS-201 * |
| 117 | 179 | 101 | 73,2 | 66,5 | 19 | 3 | - | - | M5 | 8 | 40 | 6,8 | RCS-302 * |
| 122 | 182 | 124 | 88,9 | 69,8 | 23 | 2 | - | - | M5 | 8 | 40 | 10,0 | RCS-502 * |
| 141 | 198 | 165 | 127,0 | 92,2 | 31 | 1 | - | - | M8 | 10 | 55 | 20,7 | RCS-1002 * |


** 5° angle position of coupler on RCS-101, 201, 302.


Ultra-Flat Cylinders with Stop Ring

▼ CULP-Cylinder, Ultra-Flat Cylinder, with Stop Ring




- Up to 4% side load of maximum capacity
- Stop ring for maximum stroke limitation
- Extremely low collapsed height
- Nitrocarburized surface treatment for harsh conditions.

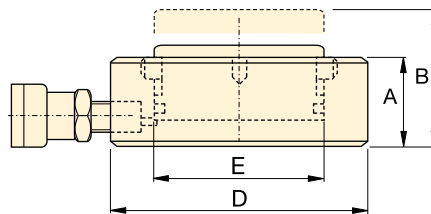

| Cylinder Capacity @ 700 bar ton (kN) | Stroke (mm) | Model Number | Cyl. Effective Area (cm ²) | Oil Capacity (cm ³) | Collapsed Height A (mm) | Extended Height B (mm) | Outside Diam. D (mm) | Cyl. Bore Diam. E (mm) |  (kg) |
|-----------------------------------------|----------------|----------------------|-------------------------------------------|------------------------------------|----------------------------|---------------------------|-------------------------|---------------------------|------------------------------------------------------------------------------------------|
| 10 (97) | 6 | CULP10 ¹⁾ | 13,9 | 8,3 | 27,5 | 33,5 | 72 | 42 | 1,0 |
| 20 (198) | 6 | CULP20 ¹⁾ | 28,3 | 17,0 | 32,0 | 38,0 | 90 | 60 | 1,7 |
| 30 (310) | 6 | CULP30 ¹⁾ | 44,2 | 26,5 | 35,0 | 41,0 | 105 | 75 | 2,5 |
| 50 (550) | 6 | CULP50 ¹⁾ | 78,5 | 47,1 | 44,5 | 50,5 | 140 | 100 | 5,4 |

¹⁾ Coupler AR630 including dustcap: Use HB7206 hose including AH630 coupler to connect to your pump.

CULP Series



Capacity:

10 - 50 ton

Stroke:

6 mm

Maximum Operating Pressure:

700 bar




IMPORTANT!

All Ultra-Flat Cylinders require a solid lifting surface for correct support. The use of these flat cylinders on surfaces such as sand, mud or dirt, may result in cylinder damage.




INCORRECT!



Rough soil



CORRECT!



Flat lifting surface

For more safety instructions see our 'Yellow Pages'.

Page: 264



Hoses

Enerpac offers a complete line of high quality hydraulic hoses. To ensure the integrity of your system, specify only Enerpac

hydraulic hoses.

Page: 122

- ▼ The Ultra-Flat cylinders are designed for applications where high lifting forces are required in confined spaces starting at 2,8 cm.




High Tonnage, Ultra-Flat Cylinders


▼ CUSP-Series, Ultra-Flat High Tonnage Cylinders, integrated tilting function.



- Up to 4% side load of maximum capacity
- Extremely low collapsed height
- Integrated tilting function up to 4 degrees to evenly distribute the load
- Nitrocarburized surface treatment for harsh conditions
- “Red Line” for visual maximum stroke limitation.

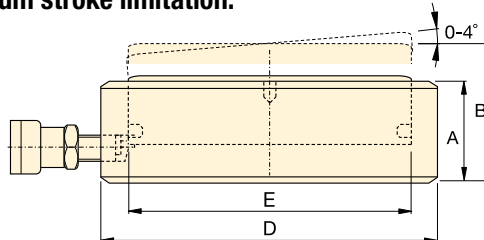

CUSP Series



Capacity:

10 - 1000 ton

Stroke Straight / Tilted Stroke:

7 - 17 mm / 6 - 10 mm

Integrated:

Tilting Function

Maximum Operating Pressure:

700 bar



IMPORTANT!

CUSP-Cylinders DO NOT have a Stop Ring for stroke limitation!




IMPORTANT!

All Ultra-Flat Cylinders require a solid lifting surface for correct support. The use of these flat cylinders on surfaces such as sand, mud or dirt, may result in cylinder damage.

See instructions on page 24 or more safety instructions in our Yerlow Pages.

Page: **264**

| Cylinder Capacity @ 700 bar | Tilted Stroke | Straight Stroke | Model Number | Tilting +/- | Cylinder Effective Area A | Oil Capacity | Collapsed Height | Extended Height | Cylinder Outside Diameter D | Cylinder Bore Diameter E |  |
|-----------------------------|---------------|-----------------|------------------------|-------------|---------------------------|--------------------|------------------|-----------------|-----------------------------|--------------------------|---------------------------------------------------------------------------------------|
| ton (kN) | (mm) | (mm) | | (degree) | (cm ²) | (cm ³) | A (mm) | B (mm) | (mm) | (mm) | (kg) |
| 10 (97) | 6 | 6,7 | CUSP10 ¹⁾ | 2 | 13,9 | 9,3 | 35,5 | 41,5 | 72 | 42 | 1,2 |
| 20 (198) | 6 | 7,0 | CUSP20 ¹⁾ | 2 | 28,3 | 19,8 | 40,5 | 46,5 | 90 | 60 | 1,9 |
| 30 (310) | 6 | 7,3 | CUSP30 ¹⁾ | 2 | 44,2 | 32,1 | 42,5 | 48,5 | 105 | 75 | 2,7 |
| 50 (550) | 10 | 13,3 | CUSP50 ¹⁾ | 4 | 78,5 | 104 | 57,0 | 67,0 | 130 | 100 | 5,6 |
| 75 (792) | 10 | 14,0 | CUSP75 ¹⁾ | 4 | 113,1 | 158 | 60,5 | 70,5 | 150 | 120 | 8,0 |
| 100 (1078) | 10 | 14,7 | CUSP100 ²⁾ | 4 | 153,9 | 226 | 63,5 | 73,5 | 170 | 140 | 10,8 |
| 150 (1589) | 10 | 14,3 | CUSP150 ²⁾ | 3 | 227,0 | 324 | 65,0 | 75,0 | 200 | 170 | 15,3 |
| 200 (2090) | 10 | 14,9 | CUSP200 ²⁾ | 3 | 298,6 | 446 | 69,0 | 79,0 | 229 | 195 | 21,5 |
| 250 (2542) | 10 | 15,5 | CUSP250 ²⁾ | 3 | 363,1 | 569 | 72,5 | 82,5 | 252 | 215 | 27,3 |
| 300 (3167) | 10 | 14,1 | CUSP300 ²⁾ | 2 | 452,4 | 637 | 72,5 | 82,5 | 282 | 240 | 34,4 |
| 400 (4008) | 10 | 14,6 | CUSP400 ²⁾ | 2 | 572,6 | 837 | 77,5 | 87,5 | 316 | 270 | 46,2 |
| 500 (5115) | 10 | 15,2 | CUSP500 ²⁾ | 2 | 730,6 | 1111 | 82,5 | 92,5 | 356 | 305 | 62,7 |
| 600 (5987) | 10 | 15,6 | CUSP600 ²⁾ | 2 | 855,3 | 1334 | 87,5 | 97,5 | 386 | 330 | 78,4 |
| 800 (7527) | 10 | 16,3 | CUSP750 ²⁾ | 2 | 1075,2 | 1757 | 93,5 | 103,5 | 432 | 370 | 105,2 |
| 1000 (10.165) | 10 | 17,4 | CUSP1000 ²⁾ | 2 | 1452,2 | 2531 | 103,0 | 113,0 | 502 | 430 | 157,0 |

¹⁾ Coupler AR630 including dustcap: Use HB7206 hose including AH630 coupler to connect to your pump.

²⁾ Coupler CR400 including dustcap: Use HC-Series hose including CH604 coupler to connect to your pump.

LPL-Series, Low-Height Lock Nut Cylinders

▼ LPL-Series, Low-Height Lock Nut Cylinders



- Lock nut provides mechanical load holding for a safe work environment
- Integrated tilt saddle allows for up to 5 degrees of misalignment
- Extreme low height for use in confined areas
- Side-load resistance 5-10% of maximum capacity
- Overflow port as stroke limiter to prevent plunger blow-out
- Single-acting, gravity-return.

▼ Only the extreme low-height LPL-cylinder fits in this confined area to lift the construction. The lock nut provides positive and safe mechanical load holding over a long period of time.



Integrated Tilt Saddles

All LPL-Series cylinders include integral tilt saddles with maximum tilt angles up to 5°.



The Summit Edition

Innovation is at the heart of the new Summit Edition of cylinders, delivering the high quality construction that you expect from Enerpac. The durability ensures your job gets done safely and reliably.

- Replaceable plunger support bearing adds support for eccentric loads *
- Nitrocarburization surface treatment for improved load and wear resistance and corrosion protection
- Low wear, high pressure seals provide longer service life.

* Eccentric load (or "side-load") is inevitable in heavy lifting. Our unique Summit Edition features provide the ultimate protection against side load. Increased bearing surface maintains stability and nitrocarburization treatment prevents scoring on the inside of the cylinder. Side-load poses a real problem.... our new cylinder features are the solution!


| Cylinder Capacity | Stroke | Model Number | Maximum Cylinder Capacity at 700 bar ton (kN) | Side-load Resistance of Maximum Capacity | Cylinder Effective Area |
|-------------------|--------|--------------|-----------------------------------------------|------------------------------------------|-------------------------|
| ton | (mm) | | | | (cm ²) |
| 60 | 50 | LPL-602 | 62 (606) | 10% | 86,6 |
| 100 | 50 | LPL-1002 | 102 (1002) | 10% | 143,1 |
| 150 | 45 | LPL-1602 | 162 (1589) | 8% | 227,0 |
| 200 | 45 | LPL-2002 | 202 (1985) | 8% | 283,5 |
| 250 | 45 | LPL-2502 | 259 (2541) | 5% | 363,1 |
| 400 | 45 | LPL-4002 | 409 (4008) | 5% | 572,6 |
| 500 | 45 | LPL-5002 | 522 (5114) | 5% | 730,6 |

Single-Acting, Low-Height Lock Nut Cylinders




IMPORTANT!

All LPL-Series cylinders require a solid lifting surface for correct support. The use of these cylinders on surfaces such as sand, mud or dirt, may result in cylinder damage.

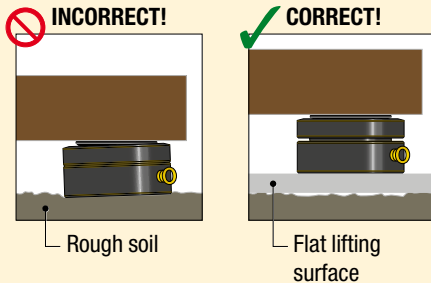

For more safety instructions see our 'Learning Center' on www.enerpac.com

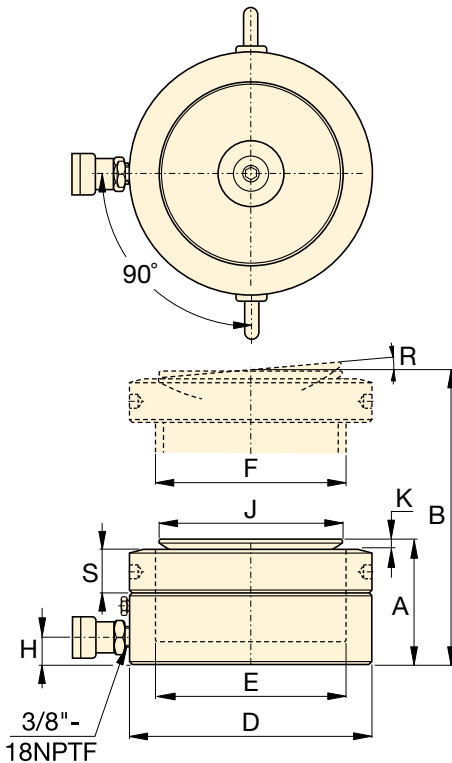

LPL Series



Capacity:

60 - 500 ton

Stroke:

45 - 50 mm

Maximum Operating Pressure:

700 bar



Longer Stroke Lock Nut Cylinders

For longer stroke applications **HCL and HCRL-Series** lock nut cylinders are the perfect choice.

Page: 42



Split-Flow Pumps

SFP-Series Pumps with multiple outlets with equal oil flow. For lifting and lowering applications on multiple points

these pumps are a far better alternative than using separately operated pumps.

Page: 240



Synchronous Lifting Systems

Pumps for multiple lift point capabilities. The economical **EVOB-Series** for basic applications and the multi-functional **EVO-Series** lifting system.

Page: 242

| Oil Capacity | Collapsed Height | Extended Height | Outside Diameter | Cylinder Bore Diameter | Plunger Diameter | Base to Advance Port | Saddle Diameter | Saddle Protrusion from Plgr. | Saddle Max. Tilt Angle | Lock Nut Height | | Model Number |
|--------------------|------------------|-----------------|------------------|------------------------|------------------|----------------------|-----------------|------------------------------|------------------------|-----------------|------|--------------|
| (cm ³) | A (mm) | B (mm) | D (mm) | E (mm) | F (mm) | H (mm) | J (mm) | K (mm) | R | S (mm) | (kg) | |
| 433,0 | 126 | 176 | 140 | 105 | Tr 105 x 4 | 19 | 96 | 7 | 5° | 28 | 15 | LPL-602 |
| 715,7 | 137 | 187 | 173 | 135 | Tr 135 x 6 | 21 | 126 | 8 | 5° | 31 | 25 | LPL-1002 |
| 1021,4 | 148 | 193 | 220 | 170 | Tr 170 x 6 | 27 | 160 | 9 | 5° | 40 | 43 | LPL-1602 |
| 1275,9 | 155 | 200 | 245 | 190 | Tr 190 x 6 | 30 | 180 | 10 | 5° | 43 | 55 | LPL-2002 |
| 1633,7 | 159 | 204 | 275 | 215 | Tr 215 x 6 | 32 | 200 | 12 | 5° | 43 | 70 | LPL-2502 |
| 2576,5 | 178 | 223 | 350 | 270 | Tr 270 x 6 | 40 | 250 | 12 | 4° | 55 | 129 | LPL-4002 |
| 3287,8 | 192 | 237 | 400 | 305 | Tr 305 x 6 | 49 | 290 | 10 | 3° | 61,5 | 183 | LPL-5002 |

▼ Shown from left to right: BRC-25, BRC-46, BRP-306, BRP-606, BRP-106C



- High strength alloy steel construction
- Hard chrome-plated plunger for long life
- Replaceable links on BRP-models
- Baked enamel finish for increased corrosion resistance
- CR-400 coupler and dust cap included on all models
- Plunger wiper reduces contamination, extending cylinder life
- Single-acting, spring return.

▼ Lifting mining conveyor belt using pull cylinders for bearing maintenance.



The Ultimate in Pulling Power



Gauges

Minimize the risk of overloading and ensure long, dependable service from your equipment. Refer to the System Components Section for a full range of gauges.

Page: 121



Attachments and Accessories

BRC-25 and BRC-46 units have base, collar and plunger threads to affix a range of optional attachments and accessories, such as chains, saddles and extension tubes.


Page: 165

▼ To lift a load bearing mast into place, BRP-series cylinders were used to tension the supporting cables.



Single-Acting, Pull Cylinders

| BRC Cylinder Mounting Dimensions (mm) | | | | |
|---------------------------------------|----------------------|-----------------|---------------------|-------------------|
| Model Number | Base Mounting Hole V | Collar Thread W | Collar Thd. Lgth. X | Mtg. Thd. Lgth. Z |
| BRC-25 | 3/4" - 14 NPT | 1 1/2" - 16 UN | 24 | 17 |
| BRC-46 | 1 1/4" - 11 1/2 NPT | 2 1/4" - 14 UN | 26 | 24 |
| BRC-106 | M30 x 2 | M85 x 2 | 25 | 24 |

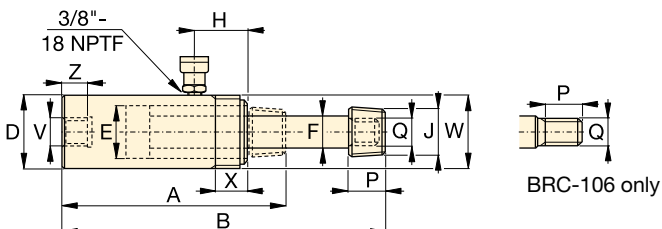

BRC-25, -46, 106

**BRC,
BRP
Series**




Capacity:
2,5 - 50 ton


Stroke:
127 - 154 mm

Maximum Operating Pressure:
700 bar


| Cylinder Capacity | Stroke | Model Number | Cylinder Effective Area | Oil Capacity | Coll. Height | Ext. Height | Outside Dia. | Cylinder Bore Dia. | Plunger Dia. | Top to Inlet Port | Saddle Diameter | Plunger Thread Length | Plunger Outside Thread | |
|-------------------|--------|----------------|-------------------------|--------------------|--------------|-------------|--------------|--------------------|--------------|-------------------|-----------------|-----------------------|------------------------|------|
| ton (kN) | (mm) | | (cm ²) | (cm ³) | A (mm) | B (mm) | D (mm) | E (mm) | F (mm) | H (mm) | J (NPT) | P (mm) | Q | (kg) |
| 2,5 (24) | 127 | BRC-25 | 3,5 | 45 | 264 | 391 | 48 | 28,4 | 19,0 | 45 | 3/4" - 14 | 28 | 1 1/16" - 24 | 1,8 |
| 5 (51) | 140 | BRC-46 | 7,3 | 101 | 301 | 441 | 57 | 42,9 | 30,2 | 42 | 1 1/4" - 11 1/2 | 32 | 1 3/16" - 16 | 4,5 |
| 10 (105) | 151 | BRC-106 | 15,0 | 228 | 289 | 440 | 85 | 54,1 | 31,8 | 39 | - | 25 | M30x2 | 9,5 |

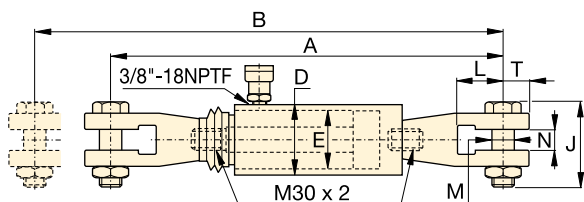


BRP-106C

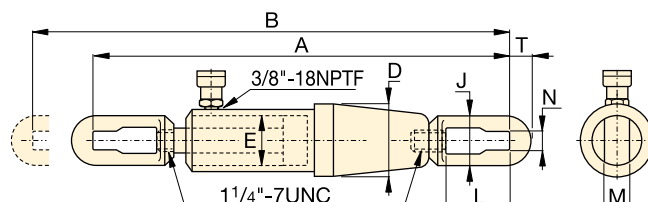

BRP-306

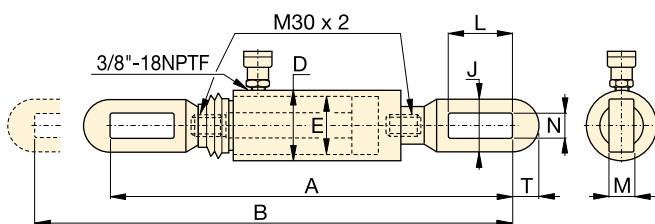

BRP-106L

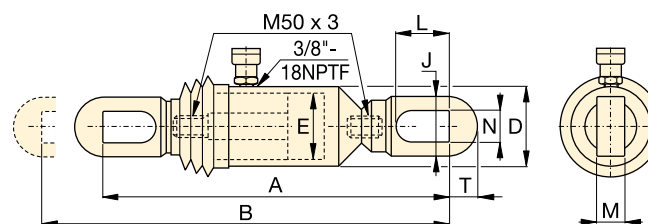

BRP-606

| Cylinder Capacity | Stroke | Model Number | Cylinder Effective Area | Oil Capacity | Coll. Height | Ext. Height | Outside Dia. | Cyl. Bore Dia. | Link Height | Link Opening | Link Thickness | Link Width | Slot to Link End | |
|-------------------|--------|-----------------|-------------------------|--------------------|--------------|-------------|--------------|----------------|-------------|--------------|----------------|------------|------------------|------|
| ton (kN) | (mm) | | (cm ²) | (cm ³) | A (mm) | B (mm) | D (mm) | E (mm) | J (mm) | L (mm) | M (mm) | N (mm) | T (mm) | (kg) |
| 10 (110) | 150 | BRP-106C | 15,8 | 238 | 601 | 751 | 85 | 54,1 | 105 | 87 | 30 | 35 | 32 | 15,3 |
| | 150 | BRP-106L | 15,8 | 238 | 581 | 751 | 85 | 54,1 | 64 | 119 | 22 | 34 | 32 | 13,3 |
| 30 (325) | 154 | BRP-306 | 46,4 | 715 | 1110 | 1264 | 137 | 88,9 | 114 | 155 | 35 | 43 | 55 | 63,1 |
| 50 (506) | 153 | BRP-606 | 72,1 | 1096 | 718 | 871 | 140 | 110,1 | 130 | 151 | 40 | 48 | 65 | 58,3 |

▼ Shown from left to right: RCH-306, RCH-120, RCH-1003




- Hollow plunger design allows for both, pull and push forces
- Single-acting, spring return
- Nickel-plated, floating center tube on models over 20 ton increases product life
- Baked enamel finish for increased corrosion resistance
- Collar threads for easy fixturing
- RCH-120 includes AR-630 coupler and has 1/4" NPTF port
- RCH-121 and RCH-1211 have FZ-1630 reducer and AR-630 coupler, all other models feature CR-400 coupler.

▼ Hollow plunger cylinder RCH-1003 used in an application for intermediate boom suspension on a dragline.



Versatility in Testing, Maintenance and Tensioning Applications



Cylinder-Pump Sets

All cylinders marked with an * are available as **sets** (cylinder, gauge, couplers, hose and pump) for your ordering convenience.

Page: **58**



Ultra-Lightweight Aluminium Cylinders

If you need a higher cylinder capacity-to-weight-ratio the lightweight **RACH-Series** are the perfect choice.

Page: **16**



Saddles

Most RCH-Series cylinders are equipped with smooth saddles. See table at next page for optional threaded saddles and all dimensional information.

Page: **31**

| Cylinder Capacity | Stroke | Model Number | Cylinder Effective Area | Oil Capacity |
|-------------------|--------|------------------|-------------------------|--------------------|
| ton (kN) | (mm) | | (cm ²) | (cm ³) |
| 13 (125) | 8 | RCH-120 | 17,9 | 14 |
| | 42 | RCH-121* | 17,9 | 75 |
| | 42 | RCH-1211 | 17,9 | 75 |
| | 76 | RCH-123 | 17,9 | 136 |
| 20 (215) | 49 | RCH-202* | 30,7 | 150 |
| | 155 | RCH-206 | 30,7 | 476 |
| 30 (326) | 64 | RCH-302* | 46,6 | 298 |
| | 155 | RCH-306 | 46,6 | 722 |
| 60 (576) | 76 | RCH-603* | 82,3 | 626 |
| | 153 | RCH-606 | 82,3 | 1259 |
| 95 (931) | 76 | RCH-1003* | 133,0 | 1011 |

* Available as set, see note on this page.

Single-Acting, Hollow Plunger Cylinders




Hoses

Enerpac offers a complete line of high quality hydraulic hoses. To ensure the integrity of your system, specify only Enerpac hydraulic hoses.

Page: **122**

RCH Series



Capacity:

13-95 ton

Stroke:

8-155 mm

Center Hole Diameter:


17,3-79,0 mm

Maximum Operating Pressure:

700 bar


Optional Threaded Hollow Saddles

| Saddle Type | Cylinder Model Number | Saddle Model Nr. | Saddle Dimensions (mm) | | |
|-----------------|-----------------------|------------------|------------------------|----------------|----|
| | | | A | B | C |
| Threaded Hollow | RCH-202, 206 | HP-2015 | 53 | 1" - 8 | 9 |
| | RCH-302, 306 | HP-3015 | 63 | 1 1/4" - 7 | 9 |
| | RCH-603, 606 | HP-5016 | 91 | 1 5/8" - 5 1/2 | 12 |
| | RCH-1003 | HP-10016 | 126 | 2 1/2" - 8 | 13 |




Smooth hollow saddles are standard on all RCH-models (except RCH-120, RCH-1211).

RCH-121 and RCH-1211 have a 47 mm dia. boss that protrudes 6 mm from base.

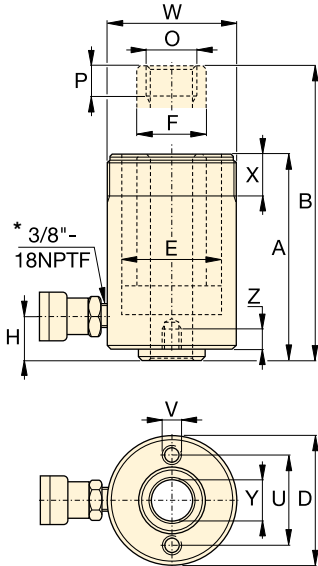

RCH-120 to RCH-123 models

* 1/4" NPTF for RCH-120 only

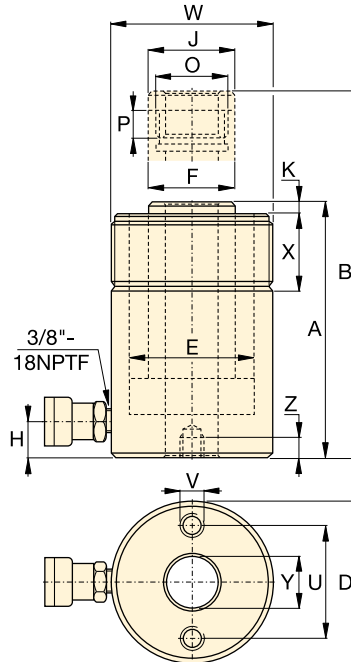

RCH-202 to RCH-1003 models

Base Mounting Hole Dimensions (mm)

| Model Number | Bolt Circle U | Thread V | Thread Depth Z |
|--------------|---------------|----------------|----------------|
| RCH-120 | 50,8 | 5/16" - 18 UNC | 9,0 |
| RCH-121 | - | - | - |
| RCH-1211 | - | - | - |
| RCH-123 | 50,8 | 5/16" - 18 UNC | 12,7 |
| RCH-202 | 82,6 | 3/8" - 16 UNC | 9,4 |
| RCH-206 | 82,6 | 3/8" - 16 UNC | 9,4 |
| RCH-302 | 92,2 | 3/8" - 16 UNC | 14,0 |
| RCH-306 | 92,2 | 3/8" - 16 UNC | 14,0 |
| RCH-603 | 130,3 | 1/2" - 13 UNC | 14,0 |
| RCH-606 | 130,3 | 1/2" - 13 UNC | 14,0 |
| RCH-1003 | 177,8 | 5/8" - 11 UNC | 19,0 |

| Coll. Height A (mm) | Ext. Height B (mm) | Outside Dia. D (mm) | Cyl. Bore Dia. E (mm) | Plgr. Dia. F (mm) | Cyl. Base to Advance Port H (mm) | Saddle Dia. J (mm) | Saddle Protrusion from Plgr. K (mm) | Plunger Internal Thread O | Plunger Thread Length P (mm) | Collar Thread W | Collar Thread Length X (mm) | Center Hole Dia. Y (mm) | Weight (kg) | Model Number |
|---------------------|--------------------|---------------------|-----------------------|-------------------|----------------------------------|--------------------|-------------------------------------|---------------------------|------------------------------|-----------------|-----------------------------|-------------------------|-------------|--------------|
| 55 | 63 | 69 | 54,1 | 35,1 | 9 | - | - | 3/4" - 16 UN | 16 | 2 3/4" - 16 | 30 | 17,3 | 1,5 | RCH-120 |
| 120 | 162 | 69 | 54,1 | 35,1 | 25 | - | - | - | - | 2 3/4" - 16 | 30 | 19,5 | 2,8 | RCH-121* |
| 120 | 162 | 69 | 54,1 | 35,1 | 25 | - | - | 3/4" - 16 UN | 16 | 2 3/4" - 16 | 30 | 17,3 | 2,8 | RCH-1211 |
| 184 | 260 | 69 | 54,1 | 35,1 | 25 | - | - | - | - | 2 3/4" - 16 | 30 | 19,5 | 4,4 | RCH-123 |
| 162 | 211 | 98 | 73,1 | 54,1 | 19 | 54 | 9,7 | 1 9/16" - 16 UN | 19 | 3 7/8" - 12 | 38 | 26,9 | 7,7 | RCH-202* |
| 306 | 461 | 98 | 73,1 | 54,1 | 25 | 54 | 9,7 | 1 9/16" - 16 UN | 19 | 3 7/8" - 12 | 38 | 26,9 | 14,1 | RCH-206 |
| 178 | 242 | 114 | 88,9 | 63,5 | 21 | 63 | 9,0 | 1 13/16" - 16 UN | 22 | 4 1/2" - 12 | 42 | 33,3 | 10,9 | RCH-302* |
| 330 | 485 | 114 | 88,9 | 63,5 | 25 | 63 | 9,0 | 1 13/16" - 16 UN | 22 | 4 1/2" - 12 | 42 | 33,3 | 21,8 | RCH-306 |
| 247 | 323 | 159 | 123,9 | 91,9 | 31 | 91 | 12,0 | 2 3/4" - 16 UN | 19 | 6 1/4" - 12 | 48 | 53,8 | 28,1 | RCH-603* |
| 323 | 476 | 159 | 123,9 | 91,9 | 31 | 91 | 12,0 | 2 3/4" - 16 UN | 19 | 6 1/4" - 12 | 48 | 53,8 | 35,4 | RCH-606 |
| 254 | 330 | 212 | 165,1 | 127,0 | 38 | 126 | 12,0 | 4" - 16 UN | 25 | 8 3/8" - 12 | 60 | 79,0 | 63,0 | RCH-1003* |

▼ Shown from left to right: RRH-3010, RRH-1001, RRH-6010



- Relief valves prevent damage in case of over-pressurisation
- Baked enamel finish for increased corrosion resistance
- Collar threads enable easy fixturing (except RRH-1001 and RRH-1508)
- Double-acting version for fast retraction
- Nickel-plated, floating center tube increases product life
- Hollow plunger allows for both pull and push forces
- CR-400 coupler and dust cap included on all models
- Plunger wiper reduces contamination, extending cylinder life.

Versatility in Testing, Maintenance and Tensioning Applications



Pump Selection

A double-acting cylinder must be powered by a pump with a 4-way valve.

Page: 115



Gauges

Minimize the risk of overloading and ensure long, dependable service from your equipment. Refer to the System Components Section for a full range of gauges.

Page: 121



Saddles

All RRH-Series cylinders are equipped with smooth saddles. See table at next page for optional threaded saddles and all dimensional information.

Page: 33

▼ Double-acting hollow plunger cylinders are applied for bridge launching systems.



| Cylinder Capacity ton | Stroke (mm) | Model Number | Max. Cylinder Capacity (kN) | | Cylinder Effective Area (cm ²) | | Oil Capacity (cm ³) | |
|--------------------------|----------------|--------------|-----------------------------|---------|--------------------------------------------|---------|---------------------------------|---------|
| | | | Advance | Retract | Advance | Retract | Advance | Retract |
| 30 | 178 | RRH-307 | 326 | 213 | 46,6 | 30,4 | 829 | 541 |
| | 258 | RRH-3010 | 326 | 213 | 46,6 | 30,4 | 1202 | 784 |
| 60 | 89 | RRH-603 | 576 | 380 | 82,3 | 54,2 | 733 | 482 |
| | 166 | RRH-606 | 576 | 380 | 82,3 | 54,2 | 1366 | 900 |
| | 257 | RRH-6010 | 576 | 380 | 82,3 | 54,2 | 2115 | 1393 |
| 95 | 38 | RRH-1001 | 931 | 612 | 133,0 | 87,4 | 505 | 333 |
| | 76 | RRH-1003 | 931 | 612 | 133,0 | 87,4 | 1011 | 666 |
| | 153 | RRH-1006 | 931 | 612 | 133,0 | 87,4 | 2035 | 1337 |
| | 257 | RRH-10010 | 931 | 612 | 133,0 | 87,4 | 3420 | 2246 |
| 145 | 203 | RRH-1508 | 1429 | 718 | 204,1 | 102,6 | 4144 | 2083 |

Double-Acting, Hollow Plunger Cylinders



Hoses

Enerpac offers a complete line of high quality hydraulic hoses. To ensure the integrity of your system, specify only Enerpac hydraulic hoses.

Page: **122**

RRH Series



Capacity:

30 - 145 ton

Stroke:

38 - 258 mm

Center Hole Diameter:


33,3-79,2 mm

Maximum Operating Pressure:

700 bar

| Optional Threaded Hollow Saddles | | | | | | |
|----------------------------------|---------------------------------|------------------|------------------------|----------------|----|--|
| Saddle Type | Cylinder Model Number | Saddle Model Nr. | Saddle Dimensions (mm) | | | |
| | | | A | B | C | |
| Threaded Hollow | RRH-307, 3010 | HP-3015 | 63 | 1 1/4" - 7 | 9 | |
| | RRH-603, 606, 6010 | HP-5016 | 91 | 1 5/8" - 5 1/2 | 12 | |
| | RRH-1001, 1003, RRH-1006, 10010 | HP-10016 | 126 | 2 1/2" - 8 | 13 | |

Smooth hollow saddles are standard on all RRH-models.

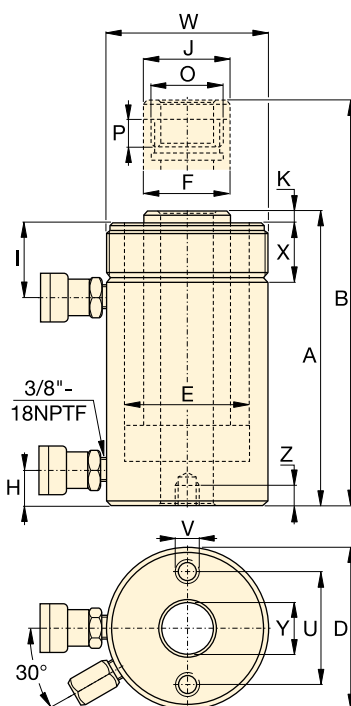

| Base Mounting Hole Dimensions (mm) | | | |
|------------------------------------|---------------|-----------|----------------|
| Model Number | Bolt Circle U | Thread V | Thread Depth Z |
| RRH-307 | 92,2 | 3/8" - 16 | 15,7 |
| RRH-3010 | 92,2 | 3/8" - 16 | 15,7 |
| RRH-603 | 130,0 | 1/2" - 13 | 14,0 |
| RRH-606 | 130,0 | 1/2" - 13 | 14,0 |
| RRH-6010 | 130,0 | 1/2" - 13 | 14,0 |
| RRH-1001 | 177,8 | 5/8" - 11 | 19,0 |
| RRH-1003 | 177,8 | 5/8" - 11 | 19,0 |
| RRH-1006 | 177,8 | 5/8" - 11 | 19,0 |
| RRH-10010 | 177,8 | 5/8" - 11 | 19,0 |
| RRH-1508 | - | - | - |

| Coll. Height A (mm) | Ext. Height B (mm) | Out. Dia. D (mm) | Cyl. Bore Dia. E (mm) | Plgr. Dia. F (mm) | Cyl. Base to Adv. Port H (mm) | Cyl. Top to Return Port I (mm) | Saddle Dia. J (mm) | Saddle Protr. fr. Plgr. K (mm) | Thread O | Plunger Thread Length P (mm) | Collar Thread W | Collar Thread Length X (mm) | Center Hole Dia. Y (mm) | (kg) | Model Number |
|---------------------|--------------------|------------------|-----------------------|-------------------|-------------------------------|--------------------------------|--------------------|--------------------------------|---------------|------------------------------|-----------------|-----------------------------|-------------------------|------|--------------|
| 330 | 508 | 114 | 88,9 | 63,5 | 25 | 60 | 63 | 9 | 1 13/16" - 16 | 22 | 4 1/2" - 12 | 42 | 33,3 | 21 | RRH-307 |
| 431 | 689 | 114 | 88,9 | 63,5 | 25 | 60 | 63 | 9 | 1 13/16" - 16 | 22 | 4 1/2" - 12 | 42 | 33,3 | 27 | RRH-3010 |
| 247 | 336 | 159 | 123,9 | 91,9 | 31 | 66 | 91 | 12 | 2 3/4" - 16 | 19 | 6 1/4" - 12 | 48 | 53,8 | 28 | RRH-603 |
| 323 | 489 | 159 | 123,9 | 91,9 | 31 | 66 | 91 | 12 | 2 3/4" - 16 | 19 | 6 1/4" - 12 | 48 | 53,8 | 35 | RRH-606 |
| 438 | 695 | 159 | 123,9 | 91,9 | 31 | 66 | 91 | 12 | 2 3/4" - 16 | 19 | 6 1/4" - 12 | 48 | 53,8 | 45 | RRH-6010 |
| 165 | 203 | 212 | 165,1 | 127,0 | 38 | 44 | 126 | 12 | 4" - 16 | 25 | - | - | 79,2 | 33 | RRH-1001 |
| 254 | 330 | 212 | 165,1 | 127,0 | 38 | 85 | 126 | 12 | 4" - 16 | 25 | 8 3/8" - 12 | 60 | 79,2 | 61 | RRH-1003 |
| 342 | 495 | 212 | 165,1 | 127,0 | 38 | 85 | 126 | 12 | 4" - 16 | 25 | 8 3/8" - 12 | 60 | 79,2 | 79 | RRH-1006 |
| 460 | 717 | 212 | 165,1 | 127,0 | 38 | 85 | 126 | 12 | 4" - 16 | 25 | 8 3/8" - 12 | 60 | 79,2 | 106 | RRH-10010 |
| 349 | 552 | 247 | 190,5 | 152,4 | 38 | 60 | 127 | 4 | 4 1/4" - 12 | 25 | - | - | 79,2 | 111 | RRH-1508 |

▼ Shown from left to right: BRD-2510, BRD-96, BRD-256, BRD-41, BRD-166



High Precision and High Cycle Performance



Speed Chart

See the Enerpac Cylinder Speed Chart in our 'Yellow Pages' to determine your approximate cylinder speed.

Page: **273**

- Designed for long life, the best choice for production applications
- Unique mounting configurations simplify fixturing
- Baked enamel finish for increased corrosion resistance
- Double-acting operation develops force in both directions, providing maximum versatility
- Plunger wiper reduces contamination, extending cylinder life
- Imperial models (RD-series) available on request.


▼ Clamping application using Enerpac BRD cylinders (with clevis eye attachments on both ends) for their high pressure capability and mounting flexibility.



| Cylinder Capacity (ton) | Stroke (mm) | Model Number | Max. Cylinder Capacity (kN) | | Cylinder Effective Area (cm ²) | | Oil Capacity (cm ³) | | Coll. Height A (mm) | Extended Height B (mm) | Body Length C (mm) | Outside Dia. D (mm) | Cylinder Bore Dia. E (mm) | Plunger Dia. F (mm) |
|----------------------------|----------------|--------------|-----------------------------|---------|--------------------------------------------|---------|---------------------------------|---------|------------------------|---------------------------|-----------------------|------------------------|------------------------------|------------------------|
| | | | Advance | Retract | Advance | Retract | Advance | Retract | | | | | | |
| 4 | 28 | BRD-41 | 35 | 16 | 5,1 | 2,2 | 14 | 6 | 186 | 214 | 162 | 50 | 25,4 | 19,0 |
| | 79 | BRD-43 | 35 | 16 | 5,1 | 2,2 | 40 | 17 | 237 | 316 | 213 | 50 | 25,4 | 19,0 |
| | 155 | BRD-46 | 35 | 16 | 5,1 | 2,2 | 79 | 34 | 313 | 468 | 289 | 50 | 25,4 | 19,0 |
| 8 | 28 | BRD-91 | 80 | 44 | 11,4 | 6,3 | 32 | 18 | 223 | 251 | 198 | 63,5 | 38,1 | 25,4 |
| | 79 | BRD-93 | 80 | 44 | 11,4 | 6,3 | 90 | 50 | 274 | 353 | 249 | 63,5 | 38,1 | 25,4 |
| | 155 | BRD-96 | 80 | 44 | 11,4 | 6,3 | 177 | 98 | 350 | 505 | 325 | 63,5 | 38,1 | 25,4 |
| | 257 | BRD-910 | 80 | 44 | 11,4 | 6,3 | 293 | 162 | 452 | 709 | 427 | 63,5 | 38,1 | 25,4 |
| 15 | 159 | BRD-166 | 142 | 77 | 20,3 | 10,6 | 323 | 169 | 389 | 548 | 359 | 80 | 50,8 | 35,0 |
| | 260 | BRD-1610 | 142 | 77 | 20,3 | 10,6 | 528 | 276 | 491 | 751 | 461 | 80 | 50,8 | 35,0 |
| 23 | 159 | BRD-256 | 222 | 98 | 31,7 | 13,7 | 504 | 218 | 424 | 583 | 397 | 92 | 63,5 | 47,8 |
| | 260 | BRD-2510 | 222 | 98 | 31,7 | 13,7 | 824 | 356 | 526 | 786 | 499 | 92 | 63,5 | 47,8 |


Double-Acting, Precision Production Cylinders

▼ BRD CYLINDER ATTACHMENTS




Retainer Nut

For locking foot or flange mountings. Tightens onto cylinder collar threads (Included with foot and flange mounting kits).




Foot Mounting

Mounts onto cylinder collar.



Flange Mounting

Mounts onto cylinder collar.



Clevis Eye

Threads onto plunger or into cylinder base.

| Model Number | BRD-Cyl. (ton) | Dimensions (mm) | | | | | | |
|-------------------------------------------------------------------------|----------------|-----------------|-----------|-------|------|------|-------|------|
| | | A | B | C | D | E | F | H |
| Foot Mounting with Retainer Nut | | | | | | | | |
| BAD-141 | 4 | 42,1 | 80 | 58,0 | 10,5 | 20,0 | 57,0 | 31,8 |
| BAD-171 | 8 | 56,1 | 105 | 78,0 | 13,5 | 25,0 | 82,5 | 44,5 |
| BAD-181 | 15 | 70,1 | 127 | 95,2 | 20,0 | 35,0 | 100,0 | 52,4 |
| BAD-191 | 23 | 85,1 | 159 | 117,5 | 26,5 | 45,0 | 125,0 | 63,5 |
| Flange Mounting with Retainer Nut | | | | | | | | |
| BAD-142 | 4 | 42,1 | 98,4 | 78,6 | 11,0 | 19,0 | - | - |
| BAD-172 | 8 | 56,1 | 121 | 98,4 | 11,0 | 25,4 | - | - |
| BAD-182 | 15 | 70,1 | 143 | 115,9 | 16,0 | 35,0 | - | - |
| BAD-192 | 23 | 85,1 | 165 | 135,7 | 17,0 | 44,5 | - | - |
| Retainer Nut | | | | | | | | |
| BAD-143 | 4 | M42 x 1,5 | 57 | 49,5 | 6,3 | 9,5 | - | - |
| BAD-173 | 8 | M56 x 2 | 75 | 65,5 | 6,7 | 12,7 | - | - |
| BAD-183 | 15 | M70 x 2 | 92 | 81,0 | 6,7 | 19,0 | - | - |
| BAD-193 | 23 | M85 x 2 | 108 | 96,5 | 6,7 | 25,4 | - | - |
| Clevis Eye (See chart below for mounting dimensions L, L1 and M) | | | | | | | | |
| BAD-150 | 4 | M16 x 1,5 | M30 x 1,5 | 52,4 | 16,0 | 15,9 | 19,1 | 23,8 |
| BAD-151 | 8 | M22 x 1,5 | M42 x 1,5 | 57,1 | 20,0 | 25,4 | 25,4 | 23,8 |
| BAD-152 | 15 | M30 x 1,5 | M56 x 2 | 77,8 | 25,0 | 31,8 | 25,4 | 30,2 |
| BAD-153 | 23 | M42 x 1,5 | M70 x 2 | 77,8 | 32,0 | 38,2 | 25,4 | 27,0 |

BRD Series



Capacity:


4 - 23 ton

Stroke:

28 - 260 mm

Maximum Operating Pressure:

700 bar

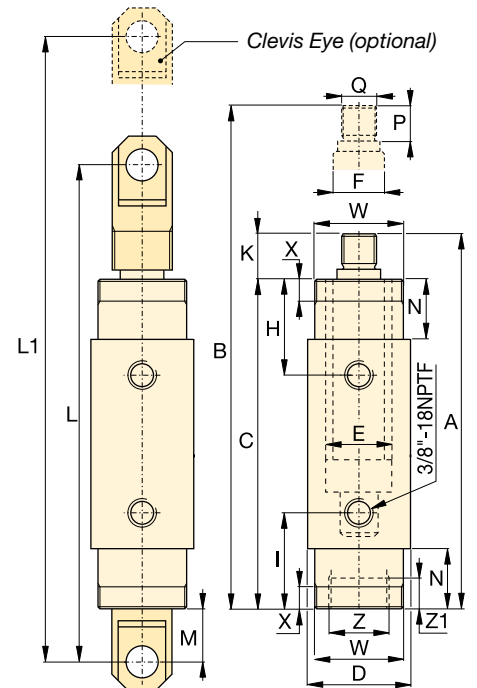

| | Top to Retract Port H (mm) | Bottom to Advance Port I (mm) | Plunger Protrusion K (mm) | Clevis Eye Mounting Dimensions | | | Neck Length N (mm) | Plunger Thread Length P (mm) | Plunger External Thread Q (mm) | Cylinder Mounting Dimensions (mm) | | | | Model Number | |
|--|----------------------------|-------------------------------|---------------------------|--------------------------------|---------|--------|--------------------|------------------------------|--------------------------------|-----------------------------------|------------------------|------------------------|----------------------------|--------------|----------|
| | | | | L (mm) | L1 (mm) | M (mm) | | | | Collar Thread W | Collar Thread Length X | Internal Base Thread Z | Int. Base Thread Length Z1 | | |
| | 47 | 47 | 24 | 258 | 286 | 41 | 29 | 22 | M16 x 1,5 | M42 x 1,5 | 11 | M30 x 1,5 | 9 | 2,0 | BRD-41 |
| | 47 | 47 | 24 | 308 | 387 | 41 | 29 | 22 | M16 x 1,5 | M42 x 1,5 | 11 | M30 x 1,5 | 9 | 2,6 | BRD-43 |
| | 47 | 47 | 24 | 385 | 540 | 41 | 29 | 22 | M16 x 1,5 | M42 x 1,5 | 11 | M30 x 1,5 | 9 | 3,6 | BRD-46 |
| | 57 | 57 | 25 | 295 | 323 | 38 | 38 | 22 | M22 x 1,5 | M56 x 2 | 14 | M42 x 1,5 | 14 | 3,0 | BRD-91 |
| | 57 | 57 | 25 | 346 | 425 | 38 | 38 | 22 | M22 x 1,5 | M56 x 2 | 14 | M42 x 1,5 | 14 | 4,2 | BRD-93 |
| | 57 | 57 | 25 | 422 | 577 | 38 | 38 | 22 | M22 x 1,5 | M56 x 2 | 14 | M42 x 1,5 | 14 | 5,6 | BRD-96 |
| | 57 | 57 | 25 | 524 | 781 | 38 | 38 | 22 | M22 x 1,5 | M56 x 2 | 14 | M42 x 1,5 | 14 | 7,3 | BRD-910 |
| | 73 | 73 | 30 | 492 | 651 | 52 | 54 | 28 | M30 x 1,5 | M70 x 2 | 22 | M56 x 2 | 24 | 10,2 | BRD-166 |
| | 73 | 73 | 30 | 593 | 853 | 52 | 54 | 28 | M30 x 1,5 | M70 x 2 | 22 | M56 x 2 | 24 | 14,5 | BRD-1610 |
| | 89 | 89 | 27 | 524 | 683 | 53 | 70 | 25 | M42 x 1,5 | M85 x 2 | 29 | M70 x 2 | 26 | 16,0 | BRD-256 |
| | 89 | 89 | 27 | 626 | 886 | 53 | 70 | 25 | M42 x 1,5 | M85 x 2 | 29 | M70 x 2 | 26 | 20,3 | BRD-2510 |

RR-Series, Double-Acting Cylinders

▼ Shown from left to right: RR-10013, RR-1502, RR-20013, RR-1010, RR-7513



- Collar threads, plunger threads and base mounting holes for easy fixturing (on most models)
- Baked enamel finish for increased corrosion resistance
- Removable hardened saddles protect plunger during lifting and pressing
- Built-in safety valve prevents accidental over-pressurization
- CR-400 couplers and dust caps included on all models
- Plunger wiper reduces contamination, extending cylinder life.

▼ A lateral bridge slide method was utilized to slide the new bridge into position. Two RR-Series double acting hydraulic cylinders with ZU4-Series electric pumps were used to push the bridge into position over PTFE sliding elements.



Most Versatile Performers

Rugged enough for the toughest job site uses and precision designed for high-cycle industrial uses.



Saddles

RR-Series cylinders up to 75 ton have plunger mounting holes for installation of CAT-Series tilt saddles.

Page: **37**



Optimum Performance

Enerpac's range of Z-Class electric pumps, fitted with manual or solenoid operated 4-way valves, offer optimum combinations with RR-Series cylinders.

Page: **90**

▼ RR-cylinders provide power and precision in a special hydraulic press.



Double-Acting Long Stroke Cylinders



Pump Selection

A double-acting cylinder must be powered by a pump with a 4-way valve.

Page: **71**

▼ QUICK SELECTION CHART

For complete technical information see next page.

| Cylinder Capacity ton (kN) | Stroke (mm) | Model Number | Cylinder Effective Area (cm ²) | | Oil Capacity (cm ³) | | Coll. Height (mm) |
|----------------------------------|----------------|-----------------|-----------------------------------------------|-------|------------------------------------|-------|----------------------|
| | | | Push | Pull | Push | Pull | |
| 10 (101) | 254 | RR-1010 | 14,5 | 4,8 | 368 | 122 | 409 |
| | 305 | RR-1012 | 14,5 | 4,8 | 442 | 147 | 457 |
| 30 (295) | 209 | RR-308 | 42,1 | 19,1 | 879 | 400 | 395 |
| | 368 | RR-3014 | 42,1 | 19,1 | 1549 | 703 | 549 |
| 50 (498) | 156 | RR-506 | 71,2 | 21,5 | 1111 | 335 | 331 |
| | 334 | RR-5013 | 71,2 | 21,5 | 2378 | 718 | 509 |
| | 511 | RR-5020 | 71,2 | 21,5 | 3638 | 1099 | 733 |
| 75 (718) | 156 | RR-756 | 102,6 | 31,4 | 1601 | 490 | 347 |
| | 333 | RR-7513 | 102,6 | 31,4 | 3417 | 1046 | 525 |
| 95 (933) | 168 | RR-1006 | 133,3 | 62,2 | 2238 | 1045 | 357 |
| | 333 | RR-10013 | 133,3 | 62,2 | 4439 | 2071 | 524 |
| | 460 | RR-10018 | 133,3 | 62,2 | 6132 | 2861 | 687 |
| 140 (1386) | 57 | RR-1502 | 198,1 | 95,4 | 1129 | 544 | 196 |
| | 156 | RR-1506 | 198,1 | 95,4 | 3090 | 1488 | 385 |
| | 333 | RR-15013 | 198,1 | 95,4 | 6597 | 3177 | 582 |
| | 815 | RR-15032 | 198,1 | 95,4 | 16145 | 7775 | 1116 |
| 200 (1995) | 152 | RR-2006 | 285,0 | 145,3 | 4332 | 2209 | 430 |
| | 330 | RR-20013 | 285,0 | 145,3 | 9405 | 4795 | 608 |
| | 457 | RR-20018 | 285,0 | 145,3 | 13025 | 6640 | 765 |
| | 610 | RR-20024 | 285,0 | 145,3 | 17385 | 8863 | 917 |
| | 914 | RR-20036 | 285,0 | 145,3 | 26049 | 13280 | 1222 |
| 325 (3201) | 1219 | RR-20048 | 285,0 | 145,3 | 34741 | 17712 | 1527 |
| | 153 | RR-3006 | 457,3 | 243,2 | 6997 | 3721 | 485 |
| | 305 | RR-30012 | 457,3 | 243,2 | 13947 | 7418 | 638 |
| | 457 | RR-30018 | 457,3 | 243,2 | 20889 | 11114 | 790 |
| | 609 | RR-30024 | 457,3 | 243,2 | 27850 | 14811 | 943 |
| | 915 | RR-30036 | 457,3 | 243,2 | 41843 | 22253 | 1247 |
| 440 (4292) | 1219 | RR-30048 | 457,3 | 243,2 | 55745 | 29646 | 1552 |
| | 152 | RR-4006 | 613,1 | 328,1 | 9319 | 4987 | 538 |
| | 305 | RR-40012 | 613,1 | 328,1 | 18700 | 10007 | 690 |
| | 457 | RR-40018 | 613,1 | 328,1 | 28018 | 14995 | 843 |
| | 610 | RR-40024 | 613,1 | 328,1 | 37400 | 20014 | 995 |
| | 914 | RR-40036 | 613,1 | 328,1 | 56037 | 29988 | 1300 |
| | 1219 | RR-40048 | 613,1 | 328,1 | 74737 | 39996 | 1605 |
| 520 (5108) | 153 | RR-5006 | 729,7 | 405,4 | 11164 | 6203 | 577 |
| | 305 | RR-50012 | 729,7 | 405,4 | 22256 | 12365 | 730 |
| | 457 | RR-50018 | 729,7 | 405,4 | 33347 | 18526 | 882 |
| | 609 | RR-50024 | 729,7 | 405,4 | 44440 | 24689 | 1035 |
| | 915 | RR-50036 | 729,7 | 405,4 | 66768 | 36973 | 1339 |
| | 1219 | RR-50048 | 729,7 | 405,4 | 88951 | 49418 | 1644 |

RR Series



Capacity:

10 - 520 ton

Stroke:

57 - 1219 mm

Maximum Operating Pressure:

700 bar



Energpac HCR-Series

If your application does not require high cycle, Energpac HCR-Series cylinders may be the right alternative.

Page: **48**



Speed Chart

See the Energpac Cylinder Speed Chart in our 'Yellow Pages' to determine your approximate cylinder speed.

Page: **273**



Optional Snap-in Saddles

Optional snap-in saddles for RR-Series double-acting cylinders:

| Saddle Type | Cylinder Model Number | Saddle Model Number |
|-------------|-----------------------|---------------------|
| Flat | RR-1010, 1012 | A-102F |
| | RR-1010, 1012 | CAT-10 |
| Tilt | RR-308, 3014 | CAT-50 |
| | RR-506, 5013 | CAT-100 |
| | RR-5020, 756 | |
| | RR-7513 | |


Standard Saddles:

| | | |
|---------|---------------|---------------|
| Grooved | RR-1010, 1012 | A-102G |
| | RR-308, 3014 | A-252G |


For additional information on saddles:

Page: **10**


RR-Series, Double-Acting Cylinders

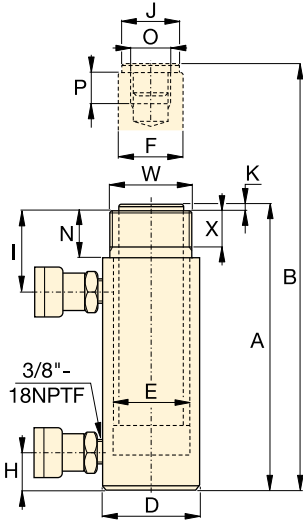

RR-1010 - RR-3014

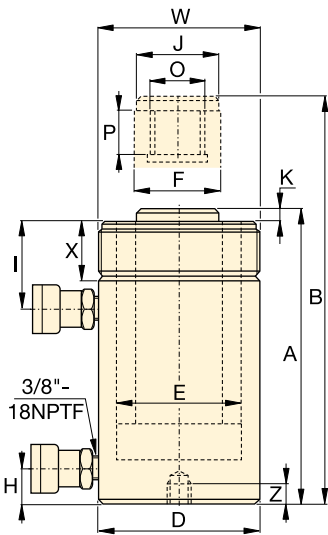


RR-506 - RR-50048



RR-1006 - RR-30048

No mounting holes on:
RR-506, 5013
RR-756, 7513
RR-1502, 15032



RR-4006 - RR-50048

Base mounting hole location is for reference only, as it is affected by assembly.



Cylinder retract capacity for certain RR cylinders may be less than theoretical values, as a result of reduced relief valve pressure settings:

RR-308/3014: 275 bar
RR-506/5013/5020: 480 bar
RR-756/7513: 495 bar

◀ For full features see previous page.

| Cylinder Capacity | Stroke | Model Number | Max. Cylinder Capacity (kN) | | Cylinder Effective Area (cm ²) | | Oil Capacity (cm ³) | | Coll. Height | Ext. Height | Outside Dia. |
|-------------------|--------|--------------|-----------------------------|------|--------------------------------------------|-------|---------------------------------|-------|--------------|-------------|--------------|
| | | | Push | Pull | Push | Pull | Push | Pull | A (mm) | B (mm) | D (mm) |
| 10 ton | 254 | RR-1010 * | 101 | 33 | 14,5 | 4,8 | 368 | 122 | 409 | 663 | 73 |
| | 305 | RR-1012 * | 101 | 33 | 14,5 | 4,8 | 442 | 147 | 457 | 762 | 73 |
| 30 | 209 | RR-308 * | 295 | 53 | 42,1 | 19,1 | 879 | 400 | 395 | 604 | 101 |
| | 368 | RR-3014 * | 295 | 53 | 42,1 | 19,1 | 1549 | 703 | 549 | 917 | 101 |
| 50 | 156 | RR-506 | 498 | 103 | 71,2 | 21,5 | 1111 | 335 | 331 | 487 | 127 |
| | 334 | RR-5013 | 498 | 103 | 71,2 | 21,5 | 2378 | 718 | 509 | 843 | 127 |
| | 511 | RR-5020 | 498 | 103 | 71,2 | 21,5 | 3638 | 1099 | 733 | 1244 | 127 |
| 75 | 156 | RR-756 | 718 | 156 | 102,6 | 31,4 | 1601 | 490 | 347 | 503 | 146 |
| | 333 | RR-7513 | 718 | 156 | 102,6 | 31,4 | 3417 | 1046 | 525 | 858 | 146 |
| 95 | 168 | RR-1006 | 933 | 435 | 133,3 | 62,2 | 2238 | 1045 | 357 | 525 | 177 |
| | 333 | RR-10013 | 933 | 435 | 133,3 | 62,2 | 4439 | 2071 | 524 | 857 | 177 |
| | 460 | RR-10018 | 933 | 435 | 133,3 | 62,2 | 6132 | 2861 | 687 | 1147 | 177 |
| 140 | 57 | RR-1502 | 1386 | 668 | 198,1 | 95,4 | 1129 | 544 | 196 | 253 | 203 |
| | 156 | RR-1506 | 1386 | 668 | 198,1 | 95,4 | 3090 | 1488 | 385 | 541 | 203 |
| | 333 | RR-15013 | 1386 | 668 | 198,1 | 95,4 | 6597 | 3177 | 582 | 915 | 203 |
| | 815 | RR-15032 | 1386 | 668 | 198,1 | 95,4 | 16145 | 7775 | 1116 | 1931 | 203 |
| 200 | 152 | RR-2006 | 1995 | 1017 | 285,0 | 145,3 | 4332 | 2209 | 430 | 582 | 247 |
| | 330 | RR-20013 | 1995 | 1017 | 285,0 | 145,3 | 9405 | 4795 | 608 | 938 | 247 |
| | 457 | RR-20018 | 1995 | 1017 | 285,0 | 145,3 | 13025 | 6640 | 765 | 1222 | 247 |
| | 610 | RR-20024 | 1995 | 1017 | 285,0 | 145,3 | 17385 | 8863 | 917 | 1527 | 247 |
| | 914 | RR-20036 | 1995 | 1017 | 285,0 | 145,3 | 26049 | 13280 | 1222 | 2136 | 247 |
| | 1219 | RR-20048 | 1995 | 1017 | 285,0 | 145,3 | 34741 | 17712 | 1527 | 2746 | 247 |
| 325 | 153 | RR-3006 | 3201 | 1703 | 457,3 | 243,2 | 6997 | 3721 | 485 | 638 | 311 |
| | 305 | RR-30012 | 3201 | 1703 | 457,3 | 243,2 | 13947 | 7418 | 638 | 943 | 311 |
| | 457 | RR-30018 | 3201 | 1703 | 457,3 | 243,2 | 20889 | 11114 | 790 | 1247 | 311 |
| | 609 | RR-30024 | 3201 | 1703 | 457,3 | 243,2 | 27850 | 14811 | 943 | 1552 | 311 |
| | 915 | RR-30036 | 3201 | 1703 | 457,3 | 243,2 | 41843 | 22253 | 1247 | 2162 | 311 |
| | 1219 | RR-30048 | 3201 | 1703 | 457,3 | 243,2 | 55745 | 29646 | 1552 | 2771 | 311 |
| 440 | 152 | RR-4006 | 4292 | 2297 | 613,1 | 328,1 | 9319 | 4987 | 538 | 690 | 358 |
| | 305 | RR-40012 | 4292 | 2297 | 613,1 | 328,1 | 18700 | 10007 | 690 | 995 | 358 |
| | 457 | RR-40018 | 4292 | 2297 | 613,1 | 328,1 | 28018 | 14995 | 843 | 1300 | 358 |
| | 610 | RR-40024 | 4292 | 2297 | 613,1 | 328,1 | 37400 | 20014 | 995 | 1605 | 358 |
| | 914 | RR-40036 | 4292 | 2297 | 613,1 | 328,1 | 56037 | 29988 | 1300 | 2214 | 358 |
| | 1219 | RR-40048 | 4292 | 2297 | 613,1 | 328,1 | 74737 | 39996 | 1605 | 2824 | 358 |
| 520 | 153 | RR-5006 | 5108 | 2838 | 729,7 | 405,4 | 11164 | 6203 | 577 | 730 | 397 |
| | 305 | RR-50012 | 5108 | 2838 | 729,7 | 405,4 | 22256 | 12365 | 730 | 1035 | 397 |
| | 457 | RR-50018 | 5108 | 2838 | 729,7 | 405,4 | 33347 | 18526 | 882 | 1339 | 397 |
| | 609 | RR-50024 | 5108 | 2838 | 729,7 | 405,4 | 44440 | 24689 | 1035 | 1644 | 397 |
| | 915 | RR-50036 | 5108 | 2838 | 729,7 | 405,4 | 66768 | 36973 | 1339 | 2254 | 397 |
| | 1219 | RR-50048 | 5108 | 2838 | 729,7 | 405,4 | 88951 | 49418 | 1644 | 2863 | 397 |

* For RR-1010 and RR-1012: N = 32 mm; for RR-308 and RR-3014: N = 55 mm.

Double-Acting Long Stroke Cylinders

Capacity:
10 - 520 ton

Stroke:
57 - 1219 mm

Maximum Operating Pressure:
700 bar

RR
Series



| Cyl. Bore Dia. E (mm) | Plgr. Dia. F (mm) | Base to Adv. Port H (mm) | Top to Ret. Port I (mm) | Saddle Dia. J (mm) | Saddle Protr. fr. Plgr. K (mm) | Plunger Internal Thread O | Plunger Thread Length P (mm) | Base Mounting Holes | | | Collar Thread W | Collar Thread Length X (mm) | Model Number | |
|-----------------------|-------------------|--------------------------|-------------------------|--------------------|--------------------------------|---------------------------|------------------------------|---------------------|------------|---------------------|-----------------|-----------------------------|--------------|----------|
| | | | | | | | | Bolt Circle U (mm) | Thread V | Thread Depth Z (mm) | | | | |
| 42,9 | 34,9 | 36 | 57 | 35 | 6 | 1" - 8 | 25 | - | - | - | 2 1/4" - 14 | 26 | 12 | RR-1010* |
| 42,9 | 34,9 | 36 | 57 | 35 | 6 | 1" - 8 | 25 | - | - | - | 2 1/4" - 14 | 26 | 14 | RR-1012* |
| 73,2 | 54,1 | 39 | 81 | 50 | 10 | 1 1/2" - 16 | 25 | - | - | - | 3 5/16" - 12 | 49 | 18 | RR-308* |
| 73,2 | 54,1 | 39 | 81 | 50 | 10 | 1 1/2" - 16 | 25 | - | - | - | 3 5/16" - 12 | 49 | 29 | RR-3014* |
| 95,2 | 79,5 | 28 | 76 | 71 | 2 | 1" - 12 | 25 | - | - | - | 5" - 12 | 44 | 30 | RR-506 |
| 95,2 | 79,5 | 28 | 76 | 71 | 2 | 1" - 12 | 25 | - | - | - | 5" - 12 | 44 | 52 | RR-5013 |
| 95,2 | 79,5 | 57 | 76 | 71 | 2 | 1" - 12 | 25 | 76 | 1/2" - 13 | 25 | 5" - 12 | 44 | 68 | RR-5020 |
| 114,3 | 95,2 | 30 | 76 | 71 | 6 | 1" - 12 | 38 | - | - | - | 5 3/4" - 12 | 38 | 41 | RR-756 |
| 114,3 | 95,2 | 30 | 81 | 71 | 6 | 1" - 12 | 38 | - | - | - | 5 3/4" - 12 | 38 | 68 | RR-7513 |
| 130,3 | 95,2 | 38 | 71 | 76 | 3 | 1 3/4" - 12 | 35 | 139 | 3/4" - 10 | 25 | 6 7/8" - 12 | 50 | 61 | RR-1006 |
| 130,3 | 95,2 | 38 | 71 | 76 | 3 | 1 3/4" - 12 | 35 | 139 | 3/4" - 10 | 25 | 6 7/8" - 12 | 50 | 93 | RR-10013 |
| 130,3 | 95,2 | 41 | 92 | 76 | 3 | 1 3/4" - 12 | 35 | 139 | 3/4" - 10 | 25 | 6 7/8" - 12 | 50 | 117 | RR-10018 |
| 158,8 | 114,3 | 22 | 66 | 95 | 19 | - | - | - | - | - | - | - | 49 | RR-1502 |
| 158,8 | 114,3 | 49 | 84 | 114 | 19 | 3 3/8" - 16 | 35 | 158 | 3/4" - 16 | 28 | 8" - 12 | 55 | 93 | RR-1506 |
| 158,8 | 114,3 | 49 | 84 | 114 | 19 | 3 3/8" - 16 | 35 | 158 | 3/4" - 16 | 28 | 8" - 12 | 55 | 124 | RR-15013 |
| 158,8 | 114,3 | 76 | 88 | 114 | 19 | 3 3/8" - 16 | 35 | - | - | - | 8" - 12 | 55 | 238 | RR-15032 |
| 190,5 | 133,4 | 57 | 96 | 133 | 22 | - | - | 127 | 1" - 8 | 25 | - | - | 147 | RR-2006 |
| 190,5 | 133,4 | 57 | 96 | 133 | 22 | 2 1/2" - 12 | 63 | 127 | 1" - 8 | 25 | 9 3/4" - 12 | 54 | 199 | RR-20013 |
| 190,5 | 133,4 | 85 | 101 | 133 | 22 | 2 1/2" - 12 | 63 | 127 | 1" - 8 | 25 | 9 3/4" - 12 | 54 | 204 | RR-20018 |
| 190,5 | 133,4 | 85 | 101 | 133 | 22 | 2 1/2" - 12 | 63 | 127 | 1" - 8 | 25 | 9 3/4" - 12 | 54 | 279 | RR-20024 |
| 190,5 | 133,4 | 85 | 101 | 133 | 22 | 2 1/2" - 12 | 63 | 127 | 1" - 8 | 25 | 9 3/4" - 12 | 54 | 383 | RR-20036 |
| 190,5 | 133,4 | 85 | 101 | 133 | 22 | 2 1/2" - 12 | 63 | 127 | 1" - 8 | 25 | 9 3/4" - 12 | 54 | 483 | RR-20048 |
| 241,3 | 165,1 | 88 | 114 | 165 | 28 | 2 1/2" - 12 | 82 | 158 | 1 1/4" - 7 | 44 | 12 1/4" - 12 | 58 | 200 | RR-3006 |
| 241,3 | 165,1 | 88 | 114 | 165 | 28 | 2 1/2" - 12 | 82 | 158 | 1 1/4" - 7 | 44 | 12 1/4" - 12 | 58 | 312 | RR-30012 |
| 241,3 | 165,1 | 88 | 114 | 165 | 28 | 2 1/2" - 12 | 82 | 158 | 1 1/4" - 7 | 44 | 12 1/4" - 12 | 58 | 385 | RR-30018 |
| 241,3 | 165,1 | 88 | 114 | 165 | 28 | 2 1/2" - 12 | 82 | 158 | 1 1/4" - 7 | 44 | 12 1/4" - 12 | 58 | 469 | RR-30024 |
| 241,3 | 165,1 | 88 | 114 | 165 | 28 | 2 1/2" - 12 | 82 | 158 | 1 1/4" - 7 | 44 | 12 1/4" - 12 | 58 | 628 | RR-30036 |
| 241,3 | 165,1 | 88 | 114 | 165 | 28 | 2 1/2" - 12 | 82 | 158 | 1 1/4" - 7 | 44 | 12 1/4" - 12 | 58 | 780 | RR-30048 |
| 279,4 | 190,5 | 108 | 133 | 190 | 28 | 3" - 12 | 95 | 203 | 1 1/2" - 6 | 50 | 14 1/8" - 8 | 65 | 303 | RR-4006 |
| 279,4 | 190,5 | 108 | 133 | 190 | 28 | 3" - 12 | 95 | 203 | 1 1/2" - 6 | 50 | 14 1/8" - 8 | 65 | 399 | RR-40012 |
| 279,4 | 190,5 | 108 | 133 | 190 | 28 | 3" - 12 | 95 | 203 | 1 1/2" - 6 | 50 | 14 1/8" - 8 | 65 | 453 | RR-40018 |
| 279,4 | 190,5 | 108 | 133 | 190 | 28 | 3" - 12 | 95 | 203 | 1 1/2" - 6 | 50 | 14 1/8" - 8 | 65 | 597 | RR-40024 |
| 279,4 | 190,5 | 108 | 133 | 190 | 28 | 3" - 12 | 95 | 203 | 1 1/2" - 6 | 50 | 14 1/8" - 8 | 65 | 792 | RR-40036 |
| 279,4 | 190,5 | 108 | 133 | 190 | 28 | 3" - 12 | 95 | 203 | 1 1/2" - 6 | 50 | 14 1/8" - 8 | 65 | 980 | RR-40048 |
| 304,8 | 203,2 | 120 | 152 | 203 | 28 | 3 1/4" - 12 | 108 | 203 | 1 3/4" - 5 | 57 | 15 5/8" - 8 | 79 | 432 | RR-5006 |
| 304,8 | 203,2 | 120 | 152 | 203 | 28 | 3 1/4" - 12 | 108 | 203 | 1 3/4" - 5 | 57 | 15 5/8" - 8 | 79 | 589 | RR-50012 |
| 304,8 | 203,2 | 120 | 152 | 203 | 28 | 3 1/4" - 12 | 108 | 203 | 1 3/4" - 5 | 57 | 15 5/8" - 8 | 79 | 680 | RR-50018 |
| 304,8 | 203,2 | 120 | 152 | 203 | 28 | 3 1/4" - 12 | 108 | 203 | 1 3/4" - 5 | 57 | 15 5/8" - 8 | 79 | 816 | RR-50024 |
| 304,8 | 203,2 | 120 | 152 | 203 | 28 | 3 1/4" - 12 | 108 | 203 | 1 3/4" - 5 | 57 | 15 5/8" - 8 | 79 | 1002 | RR-50036 |
| 304,8 | 203,2 | 120 | 152 | 203 | 28 | 3 1/4" - 12 | 108 | 203 | 1 3/4" - 5 | 57 | 15 5/8" - 8 | 79 | 1224 | RR-50048 |

▼ HCL-2006, HCG-2002, HCR-2006



Reaching the Summit Edition:

- Nitrocarburized hardened surfaces offers improved protection against side-load scoring and cyclic wear
- Weather protected, inside and out
- Low-friction locking rings spin easy, save time and effort ¹⁾
- State of the art bearing materials reduce wear and avoid bore damage even in high side-load conditions

Low wear, high pressure seals

- Improved seal design and material selection increases seal performance even in harsh conditions
- Low friction for faster retraction, longer life

Versatile

- Over 220 models in 5 configurations ¹⁾
- Certified lifting eyes, base mounting holes and collar threads are included for secure handling and cylinder mounting ¹⁾

¹⁾ See specific models technical data for more information.

Highest Level of Durability



The Summit Edition

Innovation is at the heart of the new Summit Edition cylinders, delivering the high quality construction you expect from Enerpac. The design and durability add safety and reliability to your job.

- Plunger support bearing adds support for eccentric loads ²⁾
- Nitrocarburization surface treatment for improved wear resistance and corrosion protection
- Low wear, high pressure seals provide longer service life.

²⁾ Eccentric load (or "side-load") is inevitable in heavy lifting. Our unique Summit Edition features provide the ultimate protection against side-load. Increased bearing surface maintains stability and nitrocarburization treatment prevents scoring on the inside of the cylinder. Side-load poses a real problem.... our new cylinder features are the solution!

▼ Bridge lifting and launching system. The load is balanced on groups of lock nut cylinders. The hydraulic movements are synchronised using the Enerpac PLC-controlled synchronous lift system.





High Tonnage Cylinders

The Enerpac High Tonnage Cylinders are particularly suitable for (multipoint) lifting applications.

HCG, HCR, HCL-Series Cylinders

- 50 - 1000 ton lifting capacity
- 50 - 300 mm stroke

HCG-Series - single-acting

- gravity return
- stop ring to prevent plunger blow-out
- designed to withstand up to 10% side-load of maximum capacity.

HCR-Series - double-acting

- hydraulic advance and retract for controlled movement
- designed to withstand up to 10% side-load of maximum capacity.

HCL-Series - lock nut, single-acting

- gravity return
- lock nut for mechanical load holding
- overflow port to prevent plunger blow out
- designed to withstand 10% side-load up to 90% of maximum stroke.

HCRL-Series - lock nut, double-acting


- hydraulic advance and retract
- designed to withstand up to 10% side-load of maximum capacity
- integrated tilt saddle
- lock nut for mechanical load holding
- 50 - 300 ton lifting capacity
- 150 - 300 mm stroke

LPL-Series - lock nut, low height, single-acting (see page 26)

- 60 - 500 ton lifting capacity;
- 45 - 50 mm lifting stroke
- integrated tilt saddle
- gravity return
- lock nut for mechanical load holding
- 5-10% side-load of maximum capacity.

In combination with our state of the art power packs, you will have a world class hydraulic system to perform the most challenging lifting jobs in a safe and professional manner. See page 71 for more information on our pump offering.

Page: 42

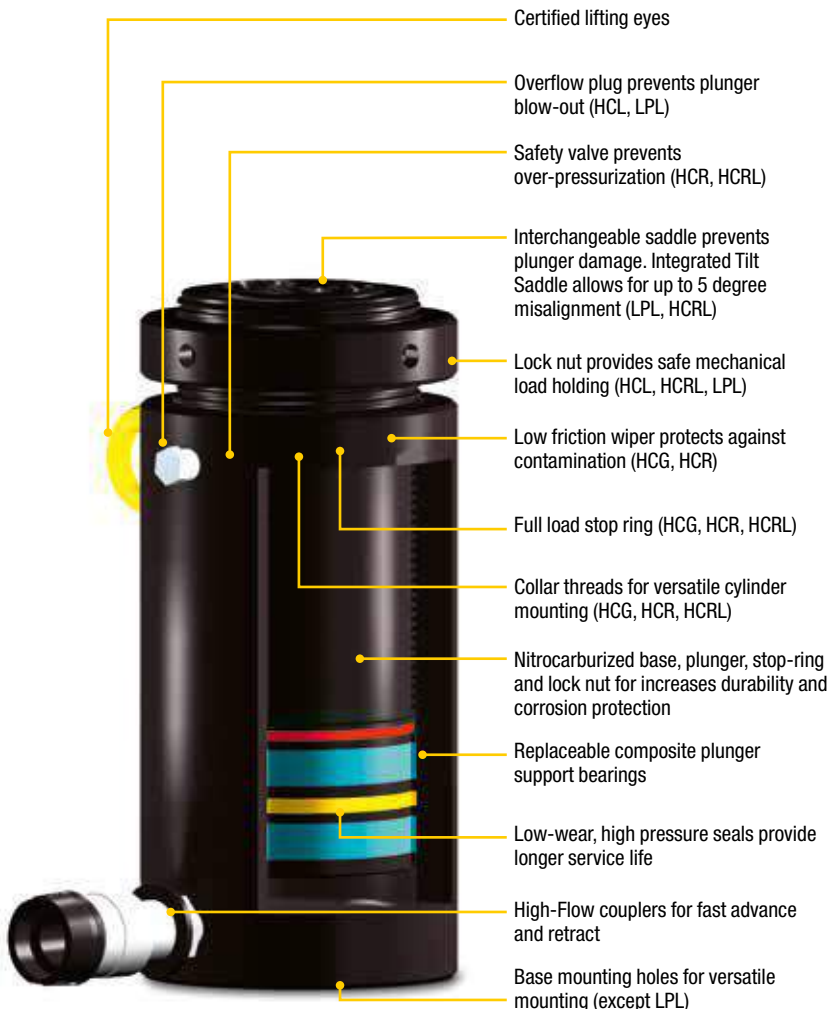

HCG HCR HCL HCRL Series



Capacity:

50 - 1000 ton

Stroke:

50 - 300 mm

Maximum Operating Pressure:

700 bar



Assisted Return Pumps

Enerpac HCG, HCL and LPL-Series cylinders are hydraulic advance and gravity return. To improve productivity and plunger retraction

Enerpac offers assisted return on ZU4 and ZE-Series pumps featuring Enerpac Venturi valve technology, specifically to facilitate the faster return of single-acting, spring and gravity return cylinders. See enerpac.com for details.

Page: 91



Split-Flow Pumps

SFP-Series pumps with multiple outlets with equal oil flow. For lifting and lowering applications on multiple points these pumps

are a far better alternative than using separately operated pumps.

Page: 240



Synchronous Lifting Systems

Pumps for multiple lift point capabilities. The economical **EVOB-Series** for basic applications and the multi-functional **EVO-Series** lifting system.

Page: 242



QUICK SELECTION

| Cylinder Capacity ton | Stroke (mm) | Maximum Cylinder Capacity at 700 bar ton (kN) | HCG-Series | | HCR-Series | | HCL-Series | | HCRL-Series * | |
|--------------------------|----------------|-----------------------------------------------|-----------------------------------------------|--------------------------|-----------------------------------------------|--------------------------|-------------------------------------------------------------|--------------------------|-------------------------------------------------------------|--------------------------|
| | | | Model Number Single-Acting <i>Page: 44</i> | Collapsed Height (mm) | Model Number Double-Acting <i>Page: 48</i> | Collapsed Height (mm) | Model Number Single-Acting With Lock Nut <i>Page: 52</i> | Collapsed Height (mm) | Model Number Double-Acting With Lock Nut <i>Page: 56</i> | Collapsed Height (mm) |
| 50 | 50 | 56 (550) | HCG-502 | 183 | HCR-502 | 183 | HCL-502 | 164 | — | — |
| | 100 | | HCG-504 | 233 | HCR-504 | 233 | HCL-504 | 214 | — | — |
| | 150 | | HCG-506 | 283 | HCR-506 | 283 | HCL-506 | 264 | HCRL-506 | 310 |
| | 200 | | HCG-508 | 346 | HCR-508 | 346 | HCL-508 | 314 | HCRL-508 | 377 |
| | 250 | | HCG-5010 | 396 | HCR-5010 | 396 | HCL-5010 | 364 | HCRL-5010 | 427 |
| | 300 | | HCG-5012 | 446 | HCR-5012 | 446 | HCL-5012 | 414 | HCRL-5012 | 477 |
| 100 | 50 | 102 (1002) | HCG-1002 | 202 | HCR-1002 | 202 | HCL-1002 | 187 | — | — |
| | 100 | | HCG-1004 | 252 | HCR-1004 | 252 | HCL-1004 | 237 | — | — |
| | 150 | | HCG-1006 | 302 | HCR-1006 | 302 | HCL-1006 | 287 | HCRL-1006 | 346 |
| | 200 | | HCG-1008 | 379 | HCR-1008 | 379 | HCL-1008 | 337 | HCRL-1008 | 421 |
| | 250 | | HCG-10010 | 429 | HCR-10010 | 429 | HCL-10010 | 387 | HCRL-10010 | 471 |
| | 300 | | HCG-10012 | 479 | HCR-10012 | 479 | HCL-10012 | 437 | HCRL-10012 | 521 |
| 150 | 50 | 153 (1497) | HCG-1502 | 220 | HCR-1502 | 220 | HCL-1502 | 209 | — | — |
| | 100 | | HCG-1504 | 270 | HCR-1504 | 270 | HCL-1504 | 259 | — | — |
| | 150 | | HCG-1506 | 320 | HCR-1506 | 320 | HCL-1506 | 309 | HCRL-1506 | 359 |
| | 200 | | HCG-1508 | 397 | HCR-1508 | 397 | HCL-1508 | 359 | HCRL-1508 | 434 |
| | 250 | | HCG-15010 | 447 | HCR-15010 | 447 | HCL-15010 | 409 | HCRL-15010 | 484 |
| | 300 | | HCG-15012 | 497 | HCR-15012 | 497 | HCL-15012 | 459 | HCRL-15012 | 534 |
| 200 | 50 | 202 (1985) | HCG-2002 | 231 | HCR-2002 | 231 | HCL-2002 | 238 | — | — |
| | 100 | | HCG-2004 | 281 | HCR-2004 | 281 | HCL-2004 | 288 | — | — |
| | 150 | | HCG-2006 | 331 | HCR-2006 | 331 | HCL-2006 | 338 | HCRL-2006 | 399 |
| | 200 | | HCG-2008 | 408 | HCR-2008 | 408 | HCL-2008 | 388 | HCRL-2008 | 469 |
| | 250 | | HCG-20010 | 458 | HCR-20010 | 458 | HCL-20010 | 438 | HCRL-20010 | 519 |
| | 300 | | HCG-20012 | 508 | HCR-20012 | 508 | HCL-20012 | 488 | HCRL-20012 | 569 |
| 250 | 50 | 259 (2541) | HCG-2502 | 241 | HCR-2502 | 241 | HCL-2502 | 249 | — | — |
| | 100 | | HCG-2504 | 291 | HCR-2504 | 291 | HCL-2504 | 299 | — | — |
| | 150 | | HCG-2506 | 341 | HCR-2506 | 341 | HCL-2506 | 349 | HCRL-2506 | 416 |
| | 200 | | HCG-2508 | 431 | HCR-2508 | 431 | HCL-2508 | 399 | HCRL-2508 | 491 |
| | 250 | | HCG-25010 | 481 | HCR-25010 | 481 | HCL-25010 | 449 | HCRL-25010 | 541 |
| | 300 | | HCG-25012 | 531 | HCR-25012 | 531 | HCL-25012 | 499 | HCRL-25012 | 591 |
| 300 | 50 | 310 (3036) | HCG-3002 | 296 | HCR-3002 | 296 | HCL-3002 | 278 | — | — |
| | 100 | | HCG-3004 | 346 | HCR-3004 | 346 | HCL-3004 | 328 | — | — |
| | 150 | | HCG-3006 | 396 | HCR-3006 | 396 | HCL-3006 | 378 | HCRL-3006 | 421 |
| | 200 | | HCG-3008 | 446 | HCR-3008 | 446 | HCL-3008 | 428 | HCRL-3008 | 496 |
| | 250 | | HCG-30010 | 496 | HCR-30010 | 496 | HCL-30010 | 478 | HCRL-30010 | 546 |
| | 300 | | HCG-30012 | 546 | HCR-30012 | 546 | HCL-30012 | 528 | HCRL-30012 | 596 |

* See page 56 for HCRL-cylinder maximum capacity.

Enerpac High Tonnage Cylinders

Capacity:
50 - 1000 ton

Stroke:
50 - 300 mm

Maximum Operating Pressure:
700 bar


**HCG
HCR
HCL
HCRL
Series**



QUICK SELECTION

| Cylinder Capacity ton | Stroke (mm) | Maximum Cylinder Capacity at 700 bar ton (kN) | HCG-Series | | HCR-Series | | HCL-Series | |
|--------------------------|----------------|--------------------------------------------------|-----------------------------------------------|--------------------------|-----------------------------------------------|--------------------------|-------------------------------------------------------------|--------------------------|
| | | | Model Number Single-Acting <i>Page: 46</i> | Collapsed Height (mm) | Model Number Double-Acting <i>Page: 50</i> | Collapsed Height (mm) | Model Number Single-Acting With Lock Nut <i>Page: 54</i> | Collapsed Height (mm) |
| 400 | 50 | 409 (4008) | HCG-4002 | 321 | HCR-4002 | 321 | HCL-4002 | 317 |
| | 100 | | HCG-4004 | 371 | HCR-4004 | 371 | HCL-4004 | 367 |
| | 150 | | HCG-4006 | 421 | HCR-4006 | 421 | HCL-4006 | 417 |
| | 200 | | HCG-4008 | 471 | HCR-4008 | 471 | HCL-4008 | 467 |
| | 250 | | HCG-40010 | 521 | HCR-40010 | 521 | HCL-40010 | 517 |
| | 300 | | HCG-40012 | 571 | HCR-40012 | 571 | HCL-40012 | 567 |
| 500 | 50 | 522 (5114) | HCG-5002 | 344 | HCR-5002 | 344 | HCL-5002 | 357 |
| | 100 | | HCG-5004 | 394 | HCR-5004 | 394 | HCL-5004 | 407 |
| | 150 | | HCG-5006 | 444 | HCR-5006 | 444 | HCL-5006 | 457 |
| | 200 | | HCG-5008 | 494 | HCR-5008 | 494 | HCL-5008 | 507 |
| | 250 | | HCG-50010 | 544 | HCR-50010 | 544 | HCL-50010 | 557 |
| | 300 | | HCG-50012 | 594 | HCR-50012 | 594 | HCL-50012 | 607 |
| 600 | 50 | 611 (5987) | HCG-6002 | 352 | HCR-6002 | 352 | HCL-6002 | 380 |
| | 100 | | HCG-6004 | 402 | HCR-6004 | 402 | HCL-6004 | 430 |
| | 150 | | HCG-6006 | 452 | HCR-6006 | 452 | HCL-6006 | 480 |
| | 200 | | HCG-6008 | 502 | HCR-6008 | 502 | HCL-6008 | 530 |
| | 250 | | HCG-60010 | 552 | HCR-60010 | 552 | HCL-60010 | 580 |
| | 300 | | HCG-60012 | 602 | HCR-60012 | 602 | HCL-60012 | 630 |
| 800 | 50 | 831 (8149) | HCG-8002 | 404 | HCR-8002 | 404 | HCL-8002 | 430 |
| | 100 | | HCG-8004 | 454 | HCR-8004 | 454 | HCL-8004 | 480 |
| | 150 | | HCG-8006 | 504 | HCR-8006 | 504 | HCL-8006 | 530 |
| | 200 | | HCG-8008 | 554 | HCR-8008 | 554 | HCL-8008 | 580 |
| | 250 | | HCG-80010 | 604 | HCR-80010 | 604 | HCL-80010 | 630 |
| | 300 | | HCG-80012 | 654 | HCR-80012 | 654 | HCL-80012 | 680 |
| 1000 | 50 | 1085 (10.644) | HCG-10002 | 442 | HCR-10002 | 442 | HCL-10002 | 484 |
| | 100 | | HCG-10004 | 492 | HCR-10004 | 492 | HCL-10004 | 534 |
| | 150 | | HCG-10006 | 542 | HCR-10006 | 542 | HCL-10006 | 584 |
| | 200 | | HCG-10008 | 592 | HCR-10008 | 592 | HCL-10008 | 634 |
| | 250 | | HCG-100010 | 642 | HCR-100010 | 642 | HCL-100010 | 684 |
| | 300 | | HCG-100012 | 692 | HCR-100012 | 692 | HCL-100012 | 734 |

HCG-Series, High Tonnage Cylinders

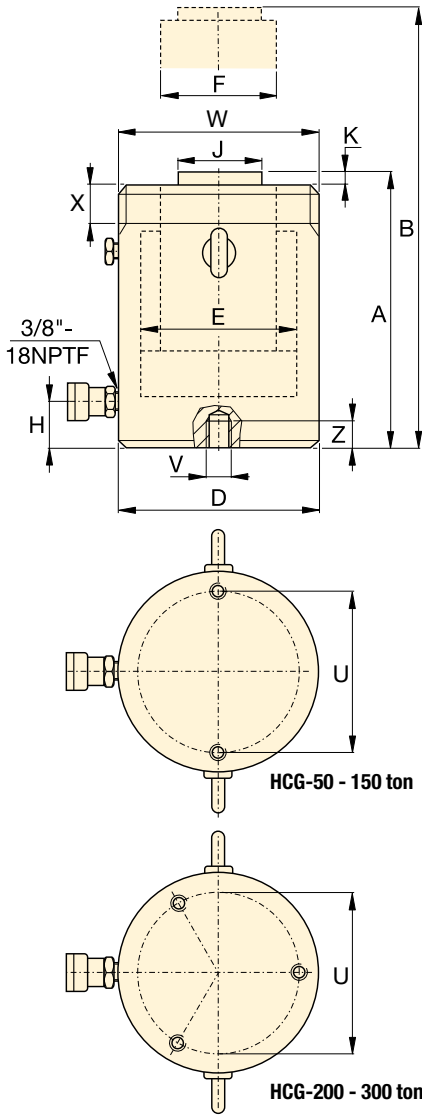

HCG-Series, Single-Acting, Gravity Return Cylinders

- Hardened surface resists side-loading and cyclic wear
- Designed to withstand 10% side-load of maximum capacity ¹⁾
- Stop ring to prevent plunger blow-out
- Weather protected, inside and out
- Upper and lower replaceable bearings enclose the cylinder plunger for support throughout the stroke
- Certified lifting eyes, base mounting holes and collar threads.

SELECTION CHART 50 - 300 TON HCG-MODELS

For 400 - 1000 ton models, see pages 46-47.

For full product features see pages 40-41.

| Cylinder Capacity ton | Stroke (mm) | Model Number | Maximum Cylinder Capacity at 700 bar ton (kN) | Cylinder Effective Area (cm ²) | Oil Capacity (cm ³) | Collapsed Height A (mm) |
|--------------------------|----------------|------------------------|-----------------------------------------------|-----------------------------------------------|------------------------------------|-------------------------------|
| 50 | 50 | HCG-502 | 56 (550) | 78,5 | 393 | 183 |
| | 100 | HCG-504 | | | 785 | 233 |
| | 150 | HCG-506 ¹⁾ | | | 1178 | 283 |
| | 200 | HCG-508 | | | 1571 | 346 |
| | 250 | HCG-5010 | | | 1963 | 396 |
| | 300 | HCG-5012 ¹⁾ | | | 2356 | 446 |
| 100 | 50 | HCG-1002 | 102 (1002) | 143,1 | 716 | 202 |
| | 100 | HCG-1004 | | | 1431 | 252 |
| | 150 | HCG-1006 | | | 2147 | 302 |
| | 200 | HCG-1008 | | | 2863 | 379 |
| | 250 | HCG-10010 | | | 3578 | 429 |
| | 300 | HCG-10012 | | | 4294 | 479 |
| 150 | 50 | HCG-1502 | 153 (1497) | 213,8 | 1069 | 220 |
| | 100 | HCG-1504 | | | 2138 | 270 |
| | 150 | HCG-1506 | | | 3207 | 320 |
| | 200 | HCG-1508 | | | 4276 | 397 |
| | 250 | HCG-15010 | | | 5346 | 447 |
| | 300 | HCG-15012 | | | 6415 | 497 |
| 200 | 50 | HCG-2002 | 202 (1985) | 283,5 | 1418 | 231 |
| | 100 | HCG-2004 | | | 2835 | 281 |
| | 150 | HCG-2006 | | | 4253 | 331 |
| | 200 | HCG-2008 | | | 5671 | 408 |
| | 250 | HCG-20010 | | | 7088 | 458 |
| | 300 | HCG-20012 | | | 8506 | 508 |
| 250 | 50 | HCG-2502 | 259 (2541) | 363,1 | 1815 | 241 |
| | 100 | HCG-2504 | | | 3631 | 291 |
| | 150 | HCG-2506 | | | 5446 | 341 |
| | 200 | HCG-2508 | | | 7261 | 431 |
| | 250 | HCG-25010 | | | 9076 | 481 |
| | 300 | HCG-25012 | | | 10.892 | 531 |
| 300 | 50 | HCG-3002 | 310 (3036) | 433,7 | 2169 | 296 |
| | 100 | HCG-3004 | | | 4337 | 346 |
| | 150 | HCG-3006 | | | 6506 | 396 |
| | 200 | HCG-3008 | | | 8675 | 446 |
| | 250 | HCG-30010 | | | 10.843 | 496 |
| | 300 | HCG-30012 | | | 13.012 | 546 |

| Collar Thread (mm) | | |
|----------------------|-------------|---------------|
| Model / Capacity ton | Thread Size | Thread Length |
| | W | X |
| HCG-50 | M130 x 2 | 30 |
| HCG-100 | M175 x 3 | 46 |
| HCG-150 | M215 x 3 | 55 |
| HCG-200 | M250 x 3 | 63 |
| HCG-250 | M280 x 3 | 64 |
| HCG-300 | M305 x 3 | 73 |

The collar thread length is designed for the full rated cylinder capacity.

| Base Mounting Holes (mm) | | | | | |
|--------------------------|-------------|-------------|----------------------|-----------------|--------------------|
| Model / Capacity ton | Bolt Circle | Thread Size | Minimum Thread Depth | Number of Holes | Angle from Coupler |
| | U | V | Z | | |
| HCG-50 | 105 | M12 x 1,75 | 22 | 2 | 90° |
| HCG-100 | 150 | M12 x 1,75 | 22 | 2 | 90° |
| HCG-150 | 185 | M12 x 1,75 | 22 | 2 | 90° |
| HCG-200 | 215 | M12 x 1,75 | 22 | 3 | 60° |
| HCG-250 | 245 | M12 x 1,75 | 22 | 3 | 60° |
| HCG-300 | 260 | M16 x 2 | 25 | 3 | 60° |

¹⁾ HCG-506 and HCG-5012: 7% side-load of maximum capacity.


Single-Acting, High Tonnage Cylinders

Capacity:
50 - 300 ton


Stroke:
50 - 300 mm

Maximum Operating Pressure:
700 bar

HCG
Series




CATG-Serie Tilt Saddle

| | Extended Height B (mm) | Outside Diameter D (mm) | Cylinder Bore Diameter E (mm) | Plunger Diameter F (mm) | Base to Advance Port H (mm) | Standard Saddle Diameter J (mm) | Saddle Protrusion from Plunger K (mm) |  (kg) | Model Number | Optional Tilt Saddle | | |
|--|------------------------------|-------------------------------|-------------------------------------|-------------------------------|-----------------------------------|---------------------------------------|---------------------------------------------|------------------------------------------------------------------------------------------|------------------------|------------------------|----------------------|---------------------|
| | | | | | | | | | | Diameter J1 (mm) | Height K1 (mm) | Saddle Model Number |
| | 233 | 130 | 100 | 70 | 38 | 50 | 3 | 17 | HCG-502 | 50 | 24 | CATG-50 |
| | 333 | | | | | | | 20 | HCG-504 | | | |
| | 433 | | | | | | | 24 | HCG-506 ¹⁾ | | | |
| | 546 | | | | | | | 29 | HCG-508 | | | |
| | 646 | | | | | | | 32 | HCG-5010 | | | |
| | 746 | | | | | | | 36 | HCG-5012 ¹⁾ | | | |
| | 252 | 175 | 135 | 95 | 38 | 75 | 3 | 33 | HCG-1002 | 73 | 29 | CATG-100 |
| | 352 | | | | | | | 40 | HCG-1004 | | | |
| | 452 | | | | | | | 46 | HCG-1006 | | | |
| | 579 | | | | | | | 58 | HCG-1008 | | | |
| | 679 | | | | | | | 65 | HCG-10010 | | | |
| | 779 | | | | | | | 71 | HCG-10012 | | | |
| | 270 | 215 | 165 | 120 | 41 | 94 | 3 | 56 | HCG-1502 | 91 | 31 | CATG-150 |
| | 370 | | | | | | | 66 | HCG-1504 | | | |
| | 470 | | | | | | | 76 | HCG-1506 | | | |
| | 597 | | | | | | | 94 | HCG-1508 | | | |
| | 697 | | | | | | | 104 | HCG-15010 | | | |
| | 797 | | | | | | | 115 | HCG-15012 | | | |
| | 281 | 250 | 190 | 140 | 47 | 113 | 3 | 81 | HCG-2002 | 118 | 35 | CATG-200 |
| | 381 | | | | | | | 95 | HCG-2004 | | | |
| | 481 | | | | | | | 109 | HCG-2006 | | | |
| | 608 | | | | | | | 136 | HCG-2008 | | | |
| | 708 | | | | | | | 150 | HCG-20010 | | | |
| | 808 | | | | | | | 164 | HCG-20012 | | | |
| | 291 | 280 | 215 | 170 | 53 | 145 | 4 | 107 | HCG-2502 | 144 | 47 | CATG-250 |
| | 391 | | | | | | | 125 | HCG-2504 | | | |
| | 491 | | | | | | | 144 | HCG-2506 | | | |
| | 631 | | | | | | | 182 | HCG-2508 | | | |
| | 731 | | | | | | | 201 | HCG-25010 | | | |
| | 831 | | | | | | | 219 | HCG-25012 | | | |
| | 346 | 305 | 235 | 200 | 58 | 177 | 4 | 158 | HCG-3002 | 160 | 64 | CATG-300 |
| | 446 | | | | | | | 182 | HCG-3004 | | | |
| | 546 | | | | | | | 206 | HCG-3006 | | | |
| | 646 | | | | | | | 230 | HCG-3008 | | | |
| | 746 | | | | | | | 254 | HCG-30010 | | | |
| | 846 | | | | | | | 278 | HCG-30012 | | | |

HCG-Series, Single-Acting, Gravity Return Cylinders

- Hardened surface resists side-loading and cyclic wear
- Designed to withstand 10% side-load of maximum capacity
- Stop ring to prevent plunger blow-out
- Weather protected, inside and out
- Upper and lower replaceable bearings enclose the cylinder plunger for support throughout the stroke
- Certified lifting eyes, base mounting holes
- Optional collar threads on 400 ton models and higher capacities.

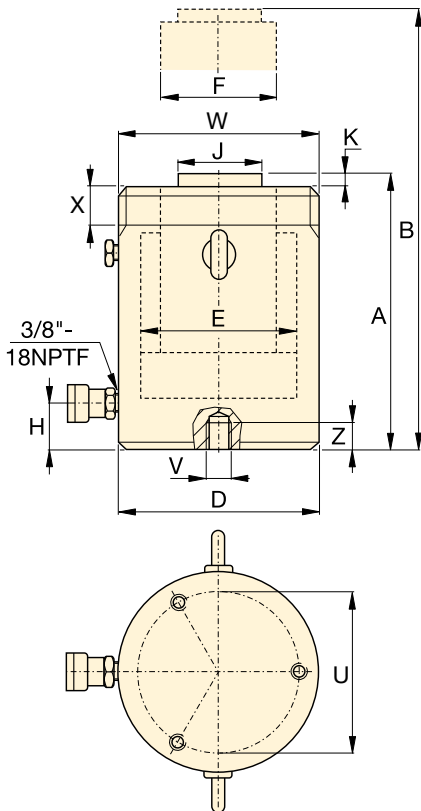

| Optional Collar Thread (mm) | | |
|-----------------------------|-------------|---------------|
| Model / Capacity ton | Thread Size | Thread Length |
| | W | X |
| HCG-400 | M350 x 3 | 83 |
| HCG-500 | M400 x 4 | 90 |
| HCG-600 | M430 x 4 | 100 |
| HCG-800 | M505 x 5 | 122 |
| HCG-1000 | M570 x 5 | 137 |

Collar thread is optional on 400 ton models and higher. For collar thread on cylinder add suffix "E002" to model number. Example: **HCG4006E002**

The collar thread length is designed for the full rated cylinder capacity.

| Base Mounting Holes (mm) | | | | | |
|--------------------------|-------------|-------------|----------------------|-----------------|--------------------|
| Model / Capacity ton | Bolt Circle | Thread Size | Minimum Thread Depth | Number of Holes | Angle from Coupler |
| | U | V | Z | | |
| HCG-400 | 300 | M16 x 2 | 25 | 3 | 60° |
| HCG-500 | 340 | M24 x 3 | 36 | 3 | 60° |
| HCG-600 | 370 | M24 x 3 | 36 | 3 | 60° |
| HCG-800 | 440 | M24 x 3 | 36 | 3 | 60° |
| HCG-1000 | 500 | M24 x 3 | 36 | 3 | 60° |

SELECTION CHART 400 - 1000 TON HCG-MODELS

For 50 - 300 ton models, see pages 44-45.

For full product features see pages 40-41.

| Cylinder Capacity ton | Stroke (mm) | Model Number | Maximum Cylinder Capacity at 700 bar ton (kN) | Cylinder Effective Area (cm ²) | Oil Capacity (cm ³) | Collapsed Height A (mm) |
|-----------------------|-------------|--------------|-----------------------------------------------|--------------------------------------------|---------------------------------|-------------------------|
| 400 | 50 | HCG-4002 | 409 (4008) | 572,6 | 2863 | 321 |
| | 100 | HCG-4004 | | | 5726 | 371 |
| | 150 | HCG-4006 | | | 8588 | 421 |
| | 200 | HCG-4008 | | | 11.451 | 471 |
| | 250 | HCG-40010 | | | 14.314 | 521 |
| | 300 | HCG-40012 | | | 17.177 | 571 |
| 500 | 50 | HCG-5002 | 522 (5114) | 730,6 | 3653 | 344 |
| | 100 | HCG-5004 | | | 7306 | 394 |
| | 150 | HCG-5006 | | | 10.959 | 444 |
| | 200 | HCG-5008 | | | 14.612 | 494 |
| | 250 | HCG-50010 | | | 18.265 | 544 |
| | 300 | HCG-50012 | | | 21.918 | 594 |
| 600 | 50 | HCG-6002 | 611 (5987) | 855,3 | 4276 | 352 |
| | 100 | HCG-6004 | | | 8553 | 402 |
| | 150 | HCG-6006 | | | 12.829 | 452 |
| | 200 | HCG-6008 | | | 17.106 | 502 |
| | 250 | HCG-60010 | | | 21.382 | 552 |
| | 300 | HCG-60012 | | | 25.659 | 602 |
| 800 | 50 | HCG-8002 | 831 (8149) | 1164,2 | 5821 | 404 |
| | 100 | HCG-8004 | | | 11.642 | 454 |
| | 150 | HCG-8006 | | | 17.462 | 504 |
| | 200 | HCG-8008 | | | 23.283 | 554 |
| | 250 | HCG-80010 | | | 29.104 | 604 |
| | 300 | HCG-80012 | | | 34.925 | 654 |
| 1000 | 50 | HCG-10002 | 1085 (10.644) | 1520,5 | 7603 | 442 |
| | 100 | HCG-10004 | | | 15.205 | 492 |
| | 150 | HCG-10006 | | | 22.808 | 542 |
| | 200 | HCG-10008 | | | 30.411 | 592 |
| | 250 | HCG-100010 | | | 38.013 | 642 |
| | 300 | HCG-100012 | | | 45.616 | 692 |

Single-Acting, High Tonnage Cylinders



▲ Offshore wind turbines levelling: Enerpac's synchronous lifting system was the solution for levelling support cross pieces on 80 wind turbines.


HCG Series



Capacity:
400 - 1000 ton

Stroke:
50 - 300 mm




Maximum Operating Pressure:
700 bar



CATG-Series Tilt Saddle

| Extended Height B (mm) | Outside Diameter D (mm) | Cylinder Bore Diameter E (mm) | Plunger Diameter F (mm) | Base to Advance Port H (mm) | Standard Saddle Diameter J (mm) | Saddle Protrusion from Plunger K (mm) | Model Number | Optional Tilt Saddle | | |
|------------------------------|-------------------------------|-------------------------------------|-------------------------------|-----------------------------------|---------------------------------------|---------------------------------------------|--------------|------------------------|----------------------|---------------------|
| | | | | | | | | Diameter J1 (mm) | Height K1 (mm) | Saddle Model Number |
| 371 | 350 | 270 | 220 | 74 | 196 | 4 | 227 | 193 | 59 | CATG-400 |
| 471 | | | | | | | 257 | | | |
| 571 | | | | | | | 287 | | | |
| 671 | | | | | | | 317 | | | |
| 771 | | | | | | | 347 | | | |
| 871 | | | | | | | 378 | | | |
| 394 | 400 | 305 | 250 | 79 | 228 | 4 | 319 | 228 | 63 | CATG-500 |
| 494 | | | | | | | 359 | | | |
| 594 | | | | | | | 399 | | | |
| 694 | | | | | | | 439 | | | |
| 794 | | | | | | | 479 | | | |
| 894 | | | | | | | 519 | | | |
| 402 | 430 | 330 | 270 | 85 | 247 | 4 | 378 | 241 | 78 | CATG-600 |
| 502 | | | | | | | 424 | | | |
| 602 | | | | | | | 470 | | | |
| 702 | | | | | | | 516 | | | |
| 802 | | | | | | | 562 | | | |
| 902 | | | | | | | 608 | | | |
| 454 | 505 | 385 | 320 | 100 | 297 | 4 | 606 | 287 | 87 | CATG-800 |
| 554 | | | | | | | 671 | | | |
| 654 | | | | | | | 735 | | | |
| 754 | | | | | | | 800 | | | |
| 854 | | | | | | | 864 | | | |
| 954 | | | | | | | 929 | | | |
| 492 | 570 | 440 | 340 | 114 | 323 | 4 | 840 | 311 | 93 | CATG-1000 |
| 592 | | | | | | | 916 | | | |
| 692 | | | | | | | 992 | | | |
| 792 | | | | | | | 1068 | | | |
| 892 | | | | | | | 1145 | | | |
| 992 | | | | | | | 1221 | | | |

HCR-Series, High Tonnage Cylinders

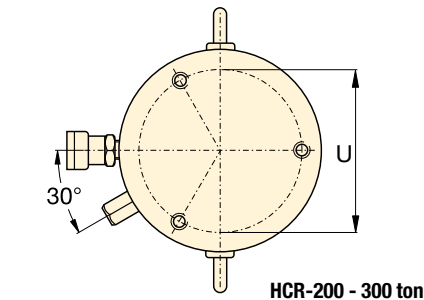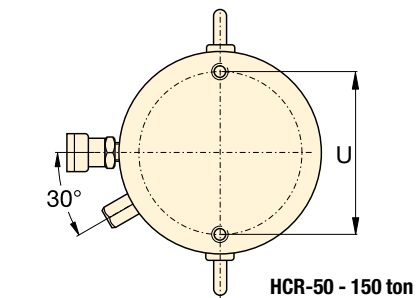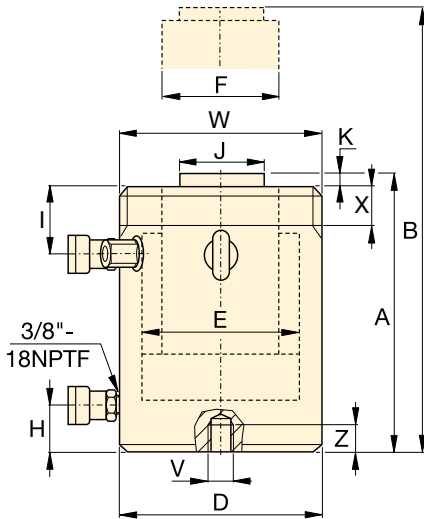

| Collar Thread (mm) | | |
|----------------------|-------------|---------------|
| Model / Capacity ton | Thread Size | Thread Length |
| | W | X |
| HCR-50 | M130 x 2 | 30 |
| HCR-100 | M175 x 3 | 46 |
| HCR-150 | M215 x 3 | 55 |
| HCR-200 | M250 x 3 | 63 |
| HCR-250 | M280 x 3 | 64 |
| HCR-300 | M305 x 3 | 73 |

The collar thread length is designed for the full rated cylinder capacity.

| Base Mounting Holes (mm) | | | | | |
|--------------------------|-------------|-------------|----------------------|-----------------|--------------------|
| Model / Capacity ton | Bolt Circle | Thread Size | Minimum Thread Depth | Number of Holes | Angle from Coupler |
| | U | V | Z | | |
| HCR-50 | 105 | M12 x 1,75 | 22 | 2 | 90° |
| HCR-100 | 150 | M12 x 1,75 | 22 | 2 | 90° |
| HCR-150 | 185 | M12 x 1,75 | 22 | 2 | 90° |
| HCR-200 | 215 | M12 x 1,75 | 22 | 3 | 60° |
| HCR-250 | 245 | M12 x 1,75 | 22 | 3 | 60° |
| HCR-300 | 260 | M16 x 2 | 25 | 3 | 60° |

HCR-Series, Double-Acting Cylinders

- Fast advance and retract
- Designed to withstand 10% side-load of maximum capacity¹⁾
- Hardened surface resists side-loading and cyclic wear
- Weather protected, inside and out
- Upper and lower replaceable bearings enclose the cylinder plunger for support throughout the stroke
- Certified lifting eyes, base mounting holes and collar threads.

SELECTION CHART & DETAILS OF 50 - 300 TON HCR-MODELS

For 400 - 1000 ton models, see pages 50-51.

For full product features see pages 40-41.

| Cylinder Capacity | Stroke | Model Number | Maximum Cylinder Capacity at 700 bar ton (kN) | Cylinder Effective Area | Oil Capacity | Collapsed Height |
|-------------------|--------|------------------------|-----------------------------------------------|-------------------------|--------------------|------------------|
| ton | (mm) | | | (cm ²) | (cm ³) | A (mm) |
| 50 | 50 | HCR-502 | 56 (550) | 78,5 | 393 | 183 |
| | 100 | HCR-504 | | | 785 | 233 |
| | 150 | HCR-506 ¹⁾ | | | 1178 | 283 |
| | 200 | HCR-508 | | | 1571 | 346 |
| | 250 | HCR-5010 | | | 1963 | 396 |
| | 300 | HCR-5012 ¹⁾ | | | 2356 | 446 |
| 100 | 50 | HCR-1002 | 102 (1002) | 143,1 | 716 | 202 |
| | 100 | HCR-1004 | | | 1431 | 252 |
| | 150 | HCR-1006 | | | 2147 | 302 |
| | 200 | HCR-1008 | | | 2863 | 379 |
| | 250 | HCR-10010 | | | 3578 | 429 |
| | 300 | HCR-10012 | | | 4294 | 479 |
| 150 | 50 | HCR-1502 | 153 (1497) | 213,8 | 1069 | 220 |
| | 100 | HCR-1504 | | | 2138 | 270 |
| | 150 | HCR-1506 | | | 3207 | 320 |
| | 200 | HCR-1508 | | | 4276 | 397 |
| | 250 | HCR-15010 | | | 5346 | 447 |
| | 300 | HCR-15012 | | | 6415 | 497 |
| 200 | 50 | HCR-2002 | 202 (1985) | 283,5 | 1418 | 231 |
| | 100 | HCR-2004 | | | 2835 | 281 |
| | 150 | HCR-2006 | | | 4253 | 331 |
| | 200 | HCR-2008 | | | 5671 | 408 |
| | 250 | HCR-20010 | | | 7088 | 458 |
| | 300 | HCR-20012 | | | 8506 | 508 |
| 250 | 50 | HCR-2502 | 259 (2541) | 363,1 | 1815 | 241 |
| | 100 | HCR-2504 | | | 3631 | 291 |
| | 150 | HCR-2506 | | | 5446 | 341 |
| | 200 | HCR-2508 | | | 7261 | 431 |
| | 250 | HCR-25010 | | | 9076 | 481 |
| | 300 | HCR-25012 | | | 10.892 | 531 |
| 300 | 50 | HCR-3002 | 310 (3036) | 433,7 | 2169 | 296 |
| | 100 | HCR-3004 | | | 4337 | 346 |
| | 150 | HCR-3006 | | | 6506 | 396 |
| | 200 | HCR-3008 | | | 8675 | 446 |
| | 250 | HCR-30010 | | | 10.843 | 496 |
| | 300 | HCR-30012 | | | 13.012 | 546 |

¹⁾ HCR-506 and HCR-5012: 7% side-load of maximum capacity.


Double-Acting, High Tonnage Cylinders

Capacity:
50 - 300 ton


Stroke:
50 - 300 mm

Maximum Operating Pressure:
700 bar

HCR Series




CATG-Series Tilt Saddle

| | Extended Height B (mm) | Outside Diameter D (mm) | Cylinder Bore Diameter E (mm) | Plunger Diameter F (mm) | Base to Advance Port H (mm) | Top to Retract Port I (mm) | Standard Saddle Diameter J (mm) | Saddle Protrusion from Plunger K (mm) |  (kg) | Model Number | Optional Tilt Saddle | | |
|--|------------------------------|-------------------------------|-------------------------------------|-------------------------------|-----------------------------------|----------------------------------|---------------------------------------|---------------------------------------------|------------------------------------------------------------------------------------------|------------------------|------------------------|----------------------|---------------------|
| | | | | | | | | | | | Diameter J1 (mm) | Height K1 (mm) | Saddle Model Number |
| | 233 | 130 | 100 | 70 | 38 | 45 | 50 | 3 | 17 | HCR-502 | 50 | 24 | CATG-50 |
| | 333 | | | | | | | | 21 | HCR-504 | | | |
| | 433 | | | | | | | | 25 | HCR-506 ¹⁾ | | | |
| | 546 | | | | | | | | 31 | HCR-508 | | | |
| | 646 | | | | | | | | 34 | HCR-5010 | | | |
| | 746 | | | | | | | | 38 | HCR-5012 ¹⁾ | | | |
| | 252 | 175 | 135 | 95 | 38 | 65 | 75 | 3 | 34 | HCR-1002 | 73 | 29 | CATG-100 |
| | 352 | | | | | | | | 41 | HCR-1004 | | | |
| | 452 | | | | | | | | 48 | HCR-1006 | | | |
| | 579 | | | | | | | | 59 | HCR-1008 | | | |
| | 679 | | | | | | | | 66 | HCR-10010 | | | |
| | 779 | | | | | | | | 73 | HCR-10012 | | | |
| | 270 | 215 | 165 | 120 | 41 | 70 | 94 | 3 | 56 | HCR-1502 | 91 | 31 | CATG-150 |
| | 370 | | | | | | | | 67 | HCR-1504 | | | |
| | 470 | | | | | | | | 78 | HCR-1506 | | | |
| | 597 | | | | | | | | 95 | HCR-1508 | | | |
| | 697 | | | | | | | | 106 | HCR-15010 | | | |
| | 797 | | | | | | | | 116 | HCR-15012 | | | |
| | 281 | 250 | 190 | 140 | 47 | 79 | 113 | 3 | 81 | HCR-2002 | 118 | 35 | CATG-200 |
| | 381 | | | | | | | | 96 | HCR-2004 | | | |
| | 481 | | | | | | | | 111 | HCR-2006 | | | |
| | 608 | | | | | | | | 139 | HCR-2008 | | | |
| | 708 | | | | | | | | 153 | HCR-20010 | | | |
| | 808 | | | | | | | | 168 | HCR-20012 | | | |
| | 291 | 280 | 215 | 170 | 53 | 79 | 145 | 4 | 107 | HCR-2502 | 144 | 47 | CATG-250 |
| | 391 | | | | | | | | 127 | HCR-2504 | | | |
| | 491 | | | | | | | | 146 | HCR-2506 | | | |
| | 631 | | | | | | | | 184 | HCR-2508 | | | |
| | 731 | | | | | | | | 207 | HCR-25010 | | | |
| | 831 | | | | | | | | 227 | HCR-25012 | | | |
| | 346 | 305 | 235 | 200 | 58 | 101 | 177 | 4 | 159 | HCR-3002 | 160 | 64 | CATG-300 |
| | 446 | | | | | | | | 183 | HCR-3004 | | | |
| | 546 | | | | | | | | 208 | HCR-3006 | | | |
| | 646 | | | | | | | | 232 | HCR-3008 | | | |
| | 746 | | | | | | | | 257 | HCR-30010 | | | |
| | 846 | | | | | | | | 281 | HCR-30012 | | | |

HCR-Series, Double-Acting Cylinders

- Fast advance and retract
- Designed to withstand 10% side-load of maximum capacity
- Hardened surface resists side-loading and cyclic wear
- Weather protected, inside and out
- Upper and lower replaceable bearings enclose the cylinder plunger for support throughout the stroke
- Certified lifting eyes, base mounting holes and optional collar threads.

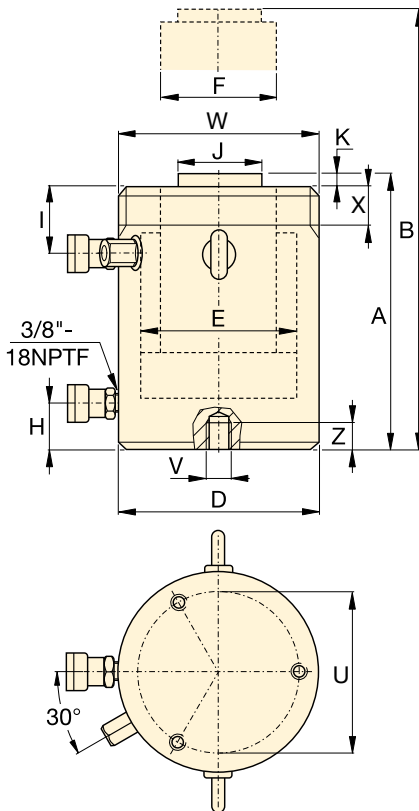

SELECTION CHART & DETAILS OF 400 - 1000 TON HCR-MODELS

For 50 - 300 ton models, see pages 48-49.

For full product features see pages 40-41.

| Cylinder Capacity | Stroke | Model Number | Maximum Cylinder Capacity at 700 bar ton (kN) | Cylinder Effective Area (cm ²) | Oil Capacity (cm ³) | Collapsed Height A (mm) |
|-------------------|--------|--------------|-----------------------------------------------|--------------------------------------------|---------------------------------|-------------------------|
| ton | (mm) | | | | | |
| 400 | 50 | HCR-4002 | 409 (4008) | 572,6 | 2863 | 321 |
| | 100 | HCR-4004 | | | 5726 | 371 |
| | 150 | HCR-4006 | | | 8588 | 421 |
| | 200 | HCR-4008 | | | 11.451 | 471 |
| | 250 | HCR-40010 | | | 14.314 | 521 |
| | 300 | HCR-40012 | | | 17.177 | 571 |
| 500 | 50 | HCR-5002 | 522 (5114) | 730,6 | 3653 | 344 |
| | 100 | HCR-5004 | | | 7306 | 394 |
| | 150 | HCR-5006 | | | 10.959 | 444 |
| | 200 | HCR-5008 | | | 14.612 | 494 |
| | 250 | HCR-50010 | | | 18.265 | 544 |
| | 300 | HCR-50012 | | | 21.918 | 594 |
| 600 | 50 | HCR-6002 | 611 (5987) | 855,3 | 4276 | 352 |
| | 100 | HCR-6004 | | | 8553 | 402 |
| | 150 | HCR-6006 | | | 12.829 | 452 |
| | 200 | HCR-6008 | | | 17.106 | 502 |
| | 250 | HCR-60010 | | | 21.382 | 552 |
| | 300 | HCR-60012 | | | 25.659 | 602 |
| 800 | 50 | HCR-8002 | 831 (8149) | 1164,2 | 5821 | 404 |
| | 100 | HCR-8004 | | | 11.642 | 454 |
| | 150 | HCR-8006 | | | 17.462 | 504 |
| | 200 | HCR-8008 | | | 23.283 | 554 |
| | 250 | HCR-80010 | | | 29.104 | 604 |
| | 300 | HCR-80012 | | | 34.925 | 654 |
| 1000 | 50 | HCR-10002 | 1085 (10.644) | 1520,5 | 7603 | 442 |
| | 100 | HCR-10004 | | | 15.205 | 492 |
| | 150 | HCR-10006 | | | 22.808 | 542 |
| | 200 | HCR-10008 | | | 30.411 | 592 |
| | 250 | HCR-100010 | | | 38.013 | 642 |
| | 300 | HCR-100012 | | | 45.616 | 692 |

Optional Collar Thread (mm)

| Model / Capacity ton | Thread Size | Thread Length |
|----------------------|-------------|---------------|
| | W | X |
| HCR-400 | M350 x 3 | 83 |
| HCR-500 | M400 x 4 | 90 |
| HCR-600 | M430 x 4 | 100 |
| HCR-800 | M505 x 5 | 122 |
| HCR-1000 | M570 x 5 | 137 |

Collar thread is optional on 400 ton models and higher. For collar thread on cylinder add suffix "E002" to model number. Example: **HCR4006E002**

The collar thread length is designed for the full rated cylinder capacity.

Base Mounting Holes (mm)

| Model / Capacity ton | Bolt Circle | Thread Size | Minimum Thread Depth | Number of Holes | Angle from Coupler |
|----------------------|-------------|-------------|----------------------|-----------------|--------------------|
| | U | V | Z | | |
| HCR-400 | 300 | M16 x 2 | 25 | 3 | 60° |
| HCR-500 | 340 | M24 x 3 | 36 | 3 | 60° |
| HCR-600 | 370 | M24 x 3 | 36 | 3 | 60° |
| HCR-800 | 440 | M24 x 3 | 36 | 3 | 60° |
| HCR-1000 | 500 | M24 x 3 | 36 | 3 | 60° |

Double-Acting, High Tonnage Cylinders



▲ The superlifting and launch of a 43.000-ton floating oil production system in Malaysia for the Gumusut-Kakap offshore field has set high benchmarks for safety through its use of sophisticated EVO-Series synchronous hydraulics to lift, balance, weigh and smoothly launch massive resource structures.


HCR Series



Capacity:
400 - 1000 ton

Stroke:
50 - 300 mm

Maximum Operating Pressure:
700 bar




CATG-Series Tilt Saddle

| Extended Height B (mm) | Outside Diameter D (mm) | Cylinder Bore Diameter E (mm) | Plunger Diameter F (mm) | Base to Advance Port H (mm) | Top to Retract Port I (mm) | Standard Saddle Diameter J (mm) | Saddle Protrusion from Plunger K (mm) | Model Number | Optional Tilt Saddle | | |
|------------------------------|-------------------------------|-------------------------------------|-------------------------------|-----------------------------------|----------------------------------|---------------------------------------|---------------------------------------------|--------------|------------------------|----------------------|---------------------|
| | | | | | | | | | Diameter J1 (mm) | Height K1 (mm) | Saddle Model Number |
| 371 | 350 | 270 | 220 | 74 | 111 | 196 | 4 | 227 | 193 | 59 | CATG-400 |
| 471 | | | | | | | | 258 | | | |
| 571 | | | | | | | | 289 | | | |
| 671 | | | | | | | | 321 | | | |
| 771 | | | | | | | | 352 | | | |
| 871 | | | | | | | | 383 | | | |
| 394 | 400 | 305 | 250 | 79 | 121 | 228 | 4 | 320 | 228 | 63 | CATG-500 |
| 494 | | | | | | | | 361 | | | |
| 594 | | | | | | | | 402 | | | |
| 694 | | | | | | | | 443 | | | |
| 794 | | | | | | | | 484 | | | |
| 894 | | | | | | | | 525 | | | |
| 402 | 430 | 330 | 270 | 85 | 121 | 247 | 4 | 379 | 241 | 78 | CATG-600 |
| 502 | | | | | | | | 427 | | | |
| 602 | | | | | | | | 474 | | | |
| 702 | | | | | | | | 521 | | | |
| 802 | | | | | | | | 568 | | | |
| 902 | | | | | | | | 615 | | | |
| 454 | 505 | 385 | 320 | 100 | 143 | 297 | 4 | 608 | 287 | 87 | CATG-800 |
| 554 | | | | | | | | 674 | | | |
| 654 | | | | | | | | 740 | | | |
| 754 | | | | | | | | 806 | | | |
| 854 | | | | | | | | 872 | | | |
| 954 | | | | | | | | 938 | | | |
| 492 | 570 | 440 | 340 | 114 | 153 | 323 | 4 | 843 | 311 | 93 | CATG-1000 |
| 592 | | | | | | | | 921 | | | |
| 692 | | | | | | | | 1000 | | | |
| 792 | | | | | | | | 1079 | | | |
| 892 | | | | | | | | 1158 | | | |
| 992 | | | | | | | | 1236 | | | |

HCL-Series, High Tonnage Lock Nut Cylinders

HCL-Series, Single-Acting, Gravity Return Cylinders

- Lock nut provides positive and safe mechanical load holding
- Low-friction locking rings spin easy, save time and effort
- Designed to withstand 10% side-load up to 90% of maximum stroke
- Hardened surface resists side-loading and cyclic wear
- Overflow port as stroke limiter to prevent plunger blow-out
- Weather protected, inside and out
- Replaceable bearings enclose the plunger for support throughout the stroke
- Certified lifting eyes and base mounting holes.

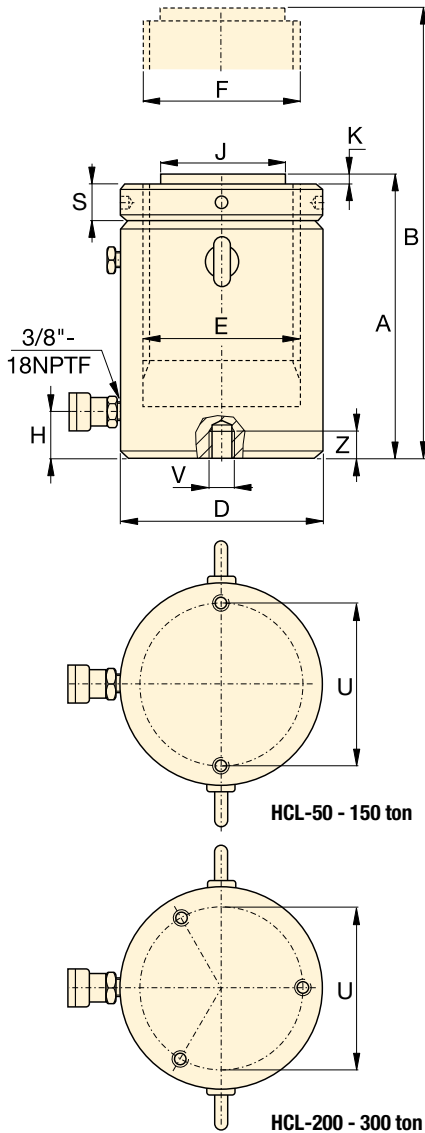

SELECTION CHART 50 - 300 TON HCL-MODELS

For 400 - 1000 ton models, see pages 54-55.

For full product features see pages 40-41.

| Cylinder Capacity ton | Stroke (mm) | Model Number | Maximum Cylinder Capacity at 700 bar ton (kN) | Cylinder Effective Area (cm ²) | Oil Capacity (cm ³) | Collapsed Height A (mm) |
|--------------------------|----------------|--------------|-----------------------------------------------|-----------------------------------------------|------------------------------------|-------------------------------|
| 50 | 50 | HCL-502 | 56 (550) | 78,5 | 393 | 164 |
| | 100 | HCL-504 | | | 785 | 214 |
| | 150 | HCL-506 | | | 1178 | 264 |
| | 200 | HCL-508 | | | 1571 | 314 |
| | 250 | HCL-5010 | | | 1963 | 364 |
| | 300 | HCL-5012 | | | 2356 | 414 |
| 100 | 50 | HCL-1002 | 102 (1002) | 143,1 | 716 | 187 |
| | 100 | HCL-1004 | | | 1431 | 237 |
| | 150 | HCL-1006 | | | 2147 | 287 |
| | 200 | HCL-1008 | | | 2863 | 337 |
| | 250 | HCL-10010 | | | 3578 | 387 |
| | 300 | HCL-10012 | | | 4294 | 437 |
| 150 | 50 | HCL-1502 | 153 (1497) | 213,8 | 1069 | 209 |
| | 100 | HCL-1504 | | | 2138 | 259 |
| | 150 | HCL-1506 | | | 3207 | 309 |
| | 200 | HCL-1508 | | | 4276 | 359 |
| | 250 | HCL-15010 | | | 5346 | 409 |
| | 300 | HCL-15012 | | | 6415 | 459 |
| 200 | 50 | HCL-2002 | 202 (1985) | 283,5 | 1418 | 238 |
| | 100 | HCL-2004 | | | 2835 | 288 |
| | 150 | HCL-2006 | | | 4253 | 338 |
| | 200 | HCL-2008 | | | 5671 | 388 |
| | 250 | HCL-20010 | | | 7088 | 438 |
| | 300 | HCL-20012 | | | 8506 | 488 |
| 250 | 50 | HCL-2502 | 259 (2541) | 363,1 | 1815 | 249 |
| | 100 | HCL-2504 | | | 3631 | 299 |
| | 150 | HCL-2506 | | | 5446 | 349 |
| | 200 | HCL-2508 | | | 7261 | 399 |
| | 250 | HCL-25010 | | | 9076 | 449 |
| | 300 | HCL-25012 | | | 10.892 | 499 |
| 300 | 50 | HCL-3002 | 310 (3036) | 433,7 | 2169 | 278 |
| | 100 | HCL-3004 | | | 4337 | 328 |
| | 150 | HCL-3006 | | | 6506 | 378 |
| | 200 | HCL-3008 | | | 8675 | 428 |
| | 250 | HCL-30010 | | | 10.843 | 478 |
| | 300 | HCL-30012 | | | 13.012 | 528 |

| Base Mounting Holes (mm) | | | | | |
|--------------------------|------------------|------------------|---------------------------|-----------------|--------------------|
| Model / Capacity ton | Bolt Circle U | Thread Size V | Minimum Thread Depth Z | Number of Holes | Angle from Coupler |
| HCL-50 | 105 | M8 x 1,25 | 10 | 2 | 90° |
| HCL-100 | 150 | M12 x 1,75 | 17 | 2 | 90° |
| HCL-150 | 185 | M12 x 1,75 | 22 | 2 | 90° |
| HCL-200 | 215 | M12 x 1,75 | 22 | 3 | 60° |
| HCL-250 | 245 | M12 x 1,75 | 22 | 3 | 60° |
| HCL-300 | 260 | M16 x 2 | 25 | 3 | 60° |


Single-Acting, Lock Nut Cylinders

Capacity:
50 - 300 ton


Stroke:
50 - 300 mm

Maximum Operating Pressure:
700 bar

HCL Series




CAT-Series Tilt Saddle

| | Extended Height B (mm) | Outside Diameter D (mm) | Cylinder Bore Diameter E (mm) | Plunger Diameter (threaded) F (mm) | Base to Advance Port H (mm) | Standard Saddle Diameter J (mm) | Saddle Protrusion from Plunger K (mm) | Lock Nut Height S (mm) |  (kg) | Model Number | Optional Tilt Saddle | | |
|--|------------------------------|-------------------------------|-------------------------------------|------------------------------------------|-----------------------------------|---------------------------------------|---------------------------------------------|------------------------------|------------------------------------------------------------------------------------------|--------------|------------------------|----------------------|---------------------|
| | | | | | | | | | | | Diameter J1 (mm) | Height K1 (mm) | Saddle Model Number |
| | 214 | 130 | 100 | Tr 100 x 4 | 24 | 71 | 2 | 25 | 17 | HCL-502 | 71 | 24 | CAT-100 |
| | 314 | | | | | | | | 22 | HCL-504 | | | |
| | 414 | | | | | | | | 27 | HCL-506 | | | |
| | 514 | | | | | | | | 32 | HCL-508 | | | |
| | 614 | | | | | | | | 38 | HCL-5010 | | | |
| | 714 | | | | | | | | 43 | HCL-5012 | | | |
| | 237 | 175 | 135 | Tr 135 x 6 | 33 | 71 | 2 | 33 | 35 | HCL-1002 | 71 | 24 | CAT-100 |
| | 337 | | | | | | | | 44 | HCL-1004 | | | |
| | 437 | | | | | | | | 54 | HCL-1006 | | | |
| | 537 | | | | | | | | 63 | HCL-1008 | | | |
| | 637 | | | | | | | | 73 | HCL-10010 | | | |
| | 737 | | | | | | | | 82 | HCL-10012 | | | |
| | 259 | 215 | 165 | Tr 165 x 6 | 41 | 130 | 2 | 40 | 59 | HCL-1502 | 130 | 19 | CAT-200 |
| | 359 | | | | | | | | 73 | HCL-1504 | | | |
| | 459 | | | | | | | | 87 | HCL-1506 | | | |
| | 559 | | | | | | | | 102 | HCL-1508 | | | |
| | 659 | | | | | | | | 116 | HCL-15010 | | | |
| | 759 | | | | | | | | 130 | HCL-15012 | | | |
| | 288 | 250 | 190 | Tr 190 x 6 | 47 | 130 | 2 | 45 | 85 | HCL-2002 | 130 | 19 | CAT-200 |
| | 388 | | | | | | | | 105 | HCL-2004 | | | |
| | 488 | | | | | | | | 124 | HCL-2006 | | | |
| | 588 | | | | | | | | 143 | HCL-2008 | | | |
| | 688 | | | | | | | | 163 | HCL-20010 | | | |
| | 788 | | | | | | | | 182 | HCL-20012 | | | |
| | 299 | 280 | 215 | Tr 215 x 6 | 53 | 150 | 2 | 52 | 119 | HCL-2502 | 150 | 19 | CAT-250 |
| | 399 | | | | | | | | 143 | HCL-2504 | | | |
| | 499 | | | | | | | | 167 | HCL-2506 | | | |
| | 599 | | | | | | | | 192 | HCL-2508 | | | |
| | 699 | | | | | | | | 216 | HCL-25010 | | | |
| | 799 | | | | | | | | 240 | HCL-25012 | | | |
| | 328 | 305 | 235 | Tr 235 x 6 | 58 | 140 | 2 | 56 | 158 | HCL-3002 | 195 | 73 | CAT-300 |
| | 428 | | | | | | | | 186 | HCL-3004 | | | |
| | 528 | | | | | | | | 215 | HCL-3006 | | | |
| | 628 | | | | | | | | 244 | HCL-3008 | | | |
| | 728 | | | | | | | | 272 | HCL-30010 | | | |
| | 828 | | | | | | | | 301 | HCL-30012 | | | |

HCL-Series, High Tonnage Lock Nut Cylinders

HCL-Series, Single-Acting, Gravity Return Cylinders

- Lock nut provides positive and safe mechanical load holding
- Low-friction locking rings spin easy, save time and effort
- Designed to withstand 10% side-load up to 90% of maximum stroke
- Hardened surface resists side-loading and cyclic wear
- Overflow port as stroke limiter to prevent plunger blow-out
- Weather protected, inside and out
- Replaceable bearings enclose the plunger for support throughout the stroke
- Certified lifting eyes and base mounting holes.

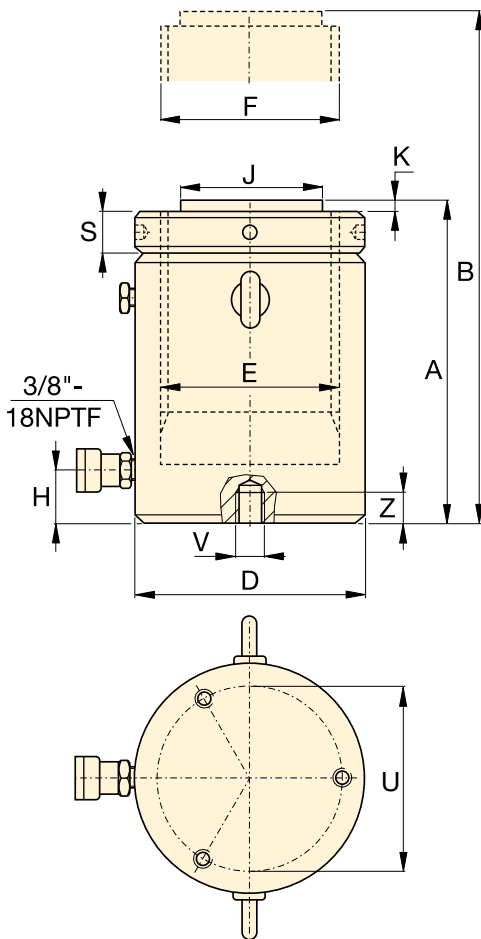

SELECTION CHART 400 - 1000 TON HCL-MODELS

For 50 - 300 ton models, see pages 52-53.

For full product features see pages 40-41.

| Cylinder Capacity | Stroke | Model Number | Maximum Cylinder Capacity at 700 bar ton (kN) | Cylinder Effective Area (cm ²) | Oil Capacity (cm ³) | Collapsed Height A (mm) |
|-------------------|--------|--------------|-----------------------------------------------|--------------------------------------------|---------------------------------|-------------------------|
| ton | (mm) | | | | | |
| 400 | 50 | HCL-4002 | 409 (4008) | 572,6 | 2863 | 317 |
| | 100 | HCL-4004 | | | 5726 | 367 |
| | 150 | HCL-4006 | | | 8588 | 417 |
| | 200 | HCL-4008 | | | 11.451 | 467 |
| | 250 | HCL-40010 | | | 14.314 | 517 |
| | 300 | HCL-40012 | | | 17.177 | 567 |
| 500 | 50 | HCL-5002 | 522 (5114) | 730,6 | 3653 | 357 |
| | 100 | HCL-5004 | | | 7306 | 407 |
| | 150 | HCL-5006 | | | 10.959 | 457 |
| | 200 | HCL-5008 | | | 14.612 | 507 |
| | 250 | HCL-50010 | | | 18.265 | 557 |
| | 300 | HCL-50012 | | | 21.918 | 607 |
| 600 | 50 | HCL-6002 | 611 (5987) | 855,3 | 4276 | 380 |
| | 100 | HCL-6004 | | | 8553 | 430 |
| | 150 | HCL-6006 | | | 12.829 | 480 |
| | 200 | HCL-6008 | | | 17.106 | 530 |
| | 250 | HCL-60010 | | | 21.382 | 580 |
| | 300 | HCL-60012 | | | 25.659 | 630 |
| 800 | 50 | HCL-8002 | 831 (8149) | 1164,2 | 5821 | 430 |
| | 100 | HCL-8004 | | | 11.642 | 480 |
| | 150 | HCL-8006 | | | 17.462 | 530 |
| | 200 | HCL-8008 | | | 23.283 | 580 |
| | 250 | HCL-80010 | | | 29.104 | 630 |
| | 300 | HCL-80012 | | | 34.925 | 680 |
| 1000 | 50 | HCL-10002 | 1085 (10.644) | 1520,5 | 7603 | 484 |
| | 100 | HCL-10004 | | | 15.205 | 534 |
| | 150 | HCL-10006 | | | 22.808 | 584 |
| | 200 | HCL-10008 | | | 30.411 | 634 |
| | 250 | HCL-100010 | | | 38.013 | 684 |
| | 300 | HCL-100012 | | | 45.616 | 734 |

| Base Mounting Holes (mm) | | | | | |
|--------------------------|---------------|---------------|------------------------|-----------------|--------------------|
| Model / Capacity ton | Bolt Circle U | Thread Size V | Minimum Thread Depth Z | Number of Holes | Angle from Coupler |
| HCL-400 | 300 | M16 x 2 | 25 | 3 | 60° |
| HCL-500 | 340 | M24 x 3 | 36 | 3 | 60° |
| HCL-600 | 370 | M24 x 3 | 36 | 3 | 60° |
| HCL-800 | 440 | M24 x 3 | 36 | 3 | 60° |
| HCL-1000 | 500 | M24 x 3 | 36 | 3 | 60° |

Single-Acting, Lock Nut Cylinders



▲ Heavy lifting and foundation levelling. The lock nut provides mechanical load holding over a long period of time.


HCL Series




Capacity:
400 - 1000 ton

Stroke:
50 - 300 mm

Maximum Operating Pressure:
700 bar



CAT-Series Tilt Saddle


| Extended Height B (mm) | Outside Diameter D (mm) | Cylinder Bore Diameter E (mm) | Plunger Diameter (threaded) F (mm) | Base to Advance Port H (mm) | Standard Saddle Diameter J (mm) | Saddle Protrusion from Plunger K (mm) | Lock Nut Height S (mm) |  (kg) | Model Number | Optional Tilt Saddle | | |
|------------------------------|-------------------------------|-------------------------------------|------------------------------------------|-----------------------------------|---------------------------------------|---------------------------------------------|------------------------------|---------------------------------------------------------------------------------------------|-------------------|------------------------|----------------------|-----------------|
| | | | | | | | | | | Diameter J1 (mm) | Height K1 (mm) | Model Number |
| 367 | 350 | 270 | Tr 270 x 6 | 67 | 159 | 5 | 65 | 236 | HCL-4002 | 225 | 85 | CAT-400 |
| 467 | | | | | | | | 274 | HCL-4004 | | | |
| 567 | | | | | | | | 311 | HCL-4006 | | | |
| 667 | | | | | | | | 349 | HCL-4008 | | | |
| 767 | | | | | | | | 387 | HCL-40010 | | | |
| 867 | | | | | | | | 425 | HCL-40012 | | | |
| 407 | 400 | 305 | Tr 305 x 6 | 75 | 179 | 5 | 72 | 341 | HCL-5002 | 250 | 91 | CAT-500 |
| 507 | | | | | | | | 390 | HCL-5004 | | | |
| 607 | | | | | | | | 439 | HCL-5006 | | | |
| 707 | | | | | | | | 489 | HCL-5008 | | | |
| 807 | | | | | | | | 538 | HCL-50010 | | | |
| 907 | | | | | | | | 587 | HCL-50012 | | | |
| 430 | 430 | 330 | Tr 330 x 6 | 81 | 194 | 5 | 80 | 427 | HCL-6002 | 275 | 99 | CAT-600 |
| 530 | | | | | | | | 484 | HCL-6004 | | | |
| 630 | | | | | | | | 541 | HCL-6006 | | | |
| 730 | | | | | | | | 598 | HCL-6008 | | | |
| 830 | | | | | | | | 655 | HCL-60010 | | | |
| 930 | | | | | | | | 712 | HCL-60012 | | | |
| 480 | 505 | 385 | Tr 385 x 6 | 95 | 224 | 5 | 90 | 668 | HCL-8002 | 320 | 124 | CAT-800 |
| 580 | | | | | | | | 746 | HCL-8004 | | | |
| 680 | | | | | | | | 825 | HCL-8006 | | | |
| 780 | | | | | | | | 904 | HCL-8008 | | | |
| 880 | | | | | | | | 982 | HCL-80010 | | | |
| 980 | | | | | | | | 1061 | HCL-80012 | | | |
| 534 | 570 | 440 | Tr 440 x 6 | 110 | 249 | 5 | 105 | 959 | HCL-10002 | 360 | 136 | CAT-1000 |
| 634 | | | | | | | | 1059 | HCL-10004 | | | |
| 734 | | | | | | | | 1160 | HCL-10006 | | | |
| 834 | | | | | | | | 1260 | HCL-10008 | | | |
| 934 | | | | | | | | 1360 | HCL-100010 | | | |
| 1034 | | | | | | | | 1460 | HCL-100012 | | | |

HCRL-Series, Double-Acting Lock Nut Cylinders

▼ HCRL-2006, HCRL-506



- Hydraulically controlled fast retraction
- Lock nut provides mechanical load holding for a safe work environment
- Designed to withstand up to 10% side-load of maximum capacity
- Integrated tilt saddle allows up to 5 degrees of misalignment
- Hardened surface resists side-loading and cyclic wear
- Weather protected, inside and out
- Replaceable bearings enclose the plunger external and internally for support
- Certified lifting eyes, base mounting holes and collar thread as standard
- Stop-ring to prevent plunger blow-out
- Low friction lock nut, to spin easily, save time and effort.

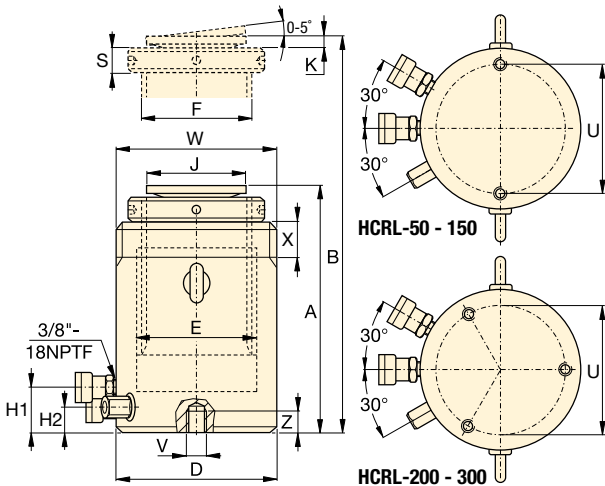

SELECTION CHART 50 - 300 TON HCRL-MODELS

For full product features see pages 40-41.

| Cylinder Capacity * | Stroke * | Model Number | Maximum Cylinder Capacity at 700 bar ton (kN) | Cylinder Effective Area (cm ²) | Oil Capacity (cm ³) |
|---------------------|----------|--------------|-----------------------------------------------|--------------------------------------------|---------------------------------|
| 50 | 150 | HCRL-506 | 49 (479) | 68,4 | 1025 |
| | 200 | HCRL-508 | | | 1367 |
| | 250 | HCRL-5010 | | | 1709 |
| | 300 | HCRL-5012 | | | 2051 |
| 100 | 150 | HCRL-1006 | 101 (990) | 141,4 | 2121 |
| | 200 | HCRL-1008 | | | 2827 |
| | 250 | HCRL-10010 | | | 3534 |
| | 300 | HCRL-10012 | | | 4241 |
| 150 | 150 | HCRL-1506 | 153 (1501) | 214,4 | 3216 |
| | 200 | HCRL-1508 | | | 4288 |
| | 250 | HCRL-15010 | | | 5360 |
| | 300 | HCRL-15012 | | | 6432 |
| 200 | 150 | HCRL-2006 | 204 (2001) | 285,9 | 4288 |
| | 200 | HCRL-2008 | | | 5718 |
| | 250 | HCRL-20010 | | | 7147 |
| | 300 | HCRL-20012 | | | 8577 |
| 250 | 150 | HCRL-2506 | 251 (2463) | 351,9 | 5278 |
| | 200 | HCRL-2508 | | | 7037 |
| | 250 | HCRL-25010 | | | 8796 |
| | 300 | HCRL-25012 | | | 10.556 |
| 300 | 150 | HCRL-3006 | 303 (2969) | 424,1 | 6362 |
| | 200 | HCRL-3008 | | | 8482 |
| | 250 | HCRL-30010 | | | 10.603 |
| | 300 | HCRL-30012 | | | 12.723 |

* Up to 2000 ton and additional stroke lengths available on request.

| Collar Thread (mm) | | |
|----------------------|---------------|-----------------|
| Model / Capacity ton | Thread Size W | Thread Length X |
| HCRL-50 | M130 x 2 | 42 |
| HCRL-100 | M185 x 2 | 57 |
| HCRL-150 | M222 x 3 | 70 |
| HCRL-200 | M260 x 3 | 79 |
| HCRL-250 | M290 x 3 | 85 |
| HCRL-300 | M315 x 3 | 94 |

The collar thread length is designed for the full rated cylinder capacity.


| Base Mounting Holes (mm) | | | |
|--------------------------|---------------|---------------|------------------------|
| Model / Capacity ton | Bolt Circle U | Thread Size V | Minimum Thread Depth Z |
| HCRL-50 | 105 | M12 x 1,75 | 22 |
| HCRL-100 | 150 | M12 x 1,75 | 22 |
| HCRL-150 | 185 | M12 x 1,75 | 22 |
| HCRL-200 | 215 | M12 x 1,75 | 22 |
| HCRL-250 | 245 | M12 x 1,75 | 22 |
| HCRL-300 | 260 | M16 x 2 | 25 |

Double-Acting Lock Nut Cylinders




Higher Capacities, Larger Strokes

The HCRL-Series Cylinders are available up to 2000 ton capacity and additional stroke lengths available on request.

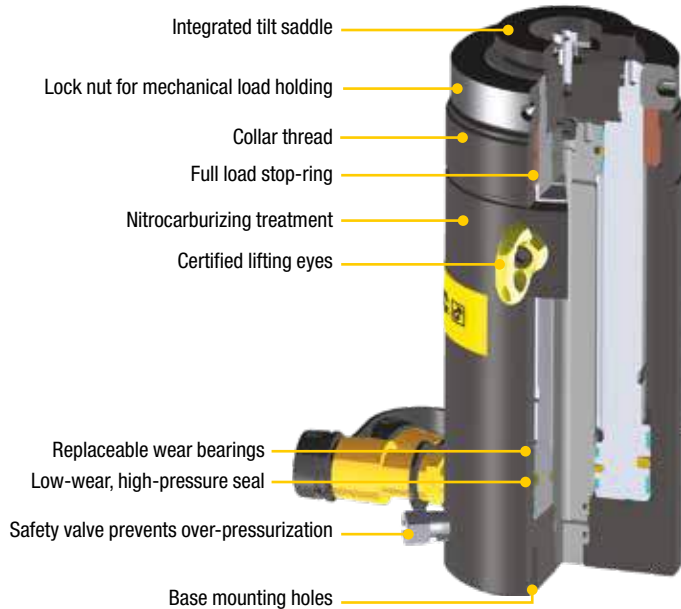

HCRL Series



Capacity:

50 - 300 ton

Stroke:

150 - 300 mm

Maximum Operating Pressure:

700 bar



Synchronous Lifting Systems

Pumps for multiple lift-point capabilities. The economical **EVOB-Series** for basic applications and the multi-functional **EVO-Series** lifting system.

Page: **242**

| Collapsed Height A (mm) | Extended Height B (mm) | Outside Diameter D (mm) | Cylinder Bore Diameter E (mm) | Plunger Diameter (threaded) F (mm) | Base to Advance Port H1 (mm) | Base to Retract Port H2 (mm) | Saddle Diameter J (mm) | Saddle Protrusion K (mm) | Lock Nut Height S (mm) | (kg) | Model Number |
|-------------------------------|------------------------------|-------------------------------|-------------------------------------|------------------------------------------|------------------------------------|------------------------------------|------------------------------|--------------------------------|------------------------------|------|--------------|
| 310 | 460 | 130 | 100 | Tr 90 x 4 | 41 | 27 | 77 | 15 | 26 | 30 | HCRL-506 |
| 377 | 577 | | | | | | | | | 36 | HCRL-508 |
| 427 | 677 | | | | | | | | | 40 | HCRL-5010 |
| 477 | 777 | | | | | | | | | 45 | HCRL-5012 |
| 346 | 496 | 185 | 140 | Tr 120 x 6 | 50 | 36 | 77 | 15 | 36 | 64 | HCRL-1006 |
| 421 | 621 | | | | | | | | | 77 | HCRL-1008 |
| 471 | 721 | | | | | | | | | 85 | HCRL-10010 |
| 521 | 821 | | | | | | | | | 94 | HCRL-10012 |
| 359 | 509 | 222 | 170 | Tr 150 x 6 | 46 | 32 | 126 | 13 | 45 | 97 | HCRL-1506 |
| 434 | 634 | | | | | | | | | 116 | HCRL-1508 |
| 484 | 734 | | | | | | | | | 129 | HCRL-15010 |
| 534 | 834 | | | | | | | | | 142 | HCRL-15012 |
| 399 | 549 | 260 | 200 | Tr 170 x 6 | 71 | 49 | 126 | 13 | 50 | 145 | HCRL-2006 |
| 469 | 669 | | | | | | | | | 168 | HCRL-2008 |
| 519 | 769 | | | | | | | | | 184 | HCRL-20010 |
| 569 | 869 | | | | | | | | | 200 | HCRL-20012 |
| 416 | 566 | 290 | 220 | Tr 190 x 6 | 71 | 49 | 160 | 15 | 55 | 190 | HCRL-2506 |
| 491 | 691 | | | | | | | | | 224 | HCRL-2508 |
| 541 | 791 | | | | | | | | | 244 | HCRL-25010 |
| 591 | 891 | | | | | | | | | 265 | HCRL-25012 |
| 421 | 571 | 315 | 240 | Tr 210 x 6 | 71 | 49 | 160 | 15 | 55 | 230 | HCRL-3006 |
| 496 | 696 | | | | | | | | | 269 | HCRL-3008 |
| 546 | 796 | | | | | | | | | 294 | HCRL-30010 |
| 596 | 896 | | | | | | | | | 319 | HCRL-30012 |

▼ SCR-1010H cylinder-pump set



The Quickest and Easiest Way to Start Working Right Away






Speed Chart

See the Enerpac Cylinder Speed Chart in our 'Yellow Pages' section.

Page: **273**

- Optimum match of individual components
- All sets are ready-for-use
- Sets include 1,8 m safety hose and gauge with gauge adaptor
- All pumps are two-speed.

| 1 Cylinder Selection (See Cylinder Section of this catalog for full product descriptions) | | Set Capacity ton (kN) | Cylinder Model Number | Stroke (mm) | Collapsed Height (mm) |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------|--------------------------|-----------------------|----------------|--------------------------|
|  <p>RC-Series, Single-Acting, General Purpose Cylinders For maximum versatility.</p> | <p>Page: 6</p> | 5 (45) | RC-55 | 127 | 215 |
| | | 10 (101) | RC-102 | 54 | 121 |
| | | | RC-106 | 156 | 247 |
| | | | RC-1010 | 257 | 349 |
| | | 15 (142) | RC-154 | 101 | 200 |
| | | | RC-156 | 152 | 271 |
| | | 25 (232) | RC-252 | 50 | 165 |
| | | | RC-254 | 102 | 215 |
| | | | RC-256 | 158 | 273 |
| | | | RC-2514 | 362 | 476 |
| 50 (498) | RC-506 | 159 | 282 | | |
|  <p>RCS-Series, Single-Acting, Low-Height Cylinders Ideal where space is restricted.</p> | <p>Page: 22</p> | 10 (101) | RCS-101 | 38 | 88 |
| | | 20 (201) | RCS-201 | 45 | 98 |
| | | 30 (295) | RCS-302 | 62 | 117 |
| | | 45 (435) | RCS-502 | 60 | 122 |
| | | 90 (887) | RCS-1002 | 57 | 141 |
|  <p>RCH-Series, Single-Acting, Hollow Cylinders For pushing and pulling applications.</p> | <p>Page: 30</p> | 13 (125) | RCH-121 | 42 | 120 |
| | | 20 (215) | RCH-202 | 49 | 162 |
| | | 30 (326) | RCH-302 | 64 | 178 |
| | | 60 (576) | RCH-603 | 76 | 247 |
| | | 95 (933) | RCH-1003 | 76 | 254 |

Single-Acting Cylinder-Pump Sets

SET SELECTION:

- 1 Select the cylinder
- 2 Select the pump
- 3 Find the set model number in the gray matrix

SELECTION EXAMPLE

Selected cylinder:

- RC-106, Single-Acting cylinder with 156 mm stroke

Selected pump:

- P-392, Lightweight hand pump

Set model number:

- SCR-106H

Included:

- HC-7206 hose
- GF-10B gauge
- GA-2 adaptor

SC Series



Capacity:

5 - 95 ton

Stroke:

38 - 362 mm

Maximum Operating Pressure:

700 bar



Power Box

Tool box with hand pump, gauge adaptor assembly, hose and LW-, RC-, RCS, RSM- or WR-Series cylinder.

Page: **61**

2

Pump selection (See the Pump Section in this catalog for full product descriptions.)

Accessories included

3

| Hand Pump P-142 | Hand Pump P-392 | Hand Pump P-80 | Foot Pump P-392FP | XA-Series Air Pump XA-11 | XC-Series Cordless Pump XC-1201ME ²⁾ | Hose Model Number | Gauge Model Number | Gauge Adaptor Model Nr. |
|--------------------|--------------------|-------------------|----------------------|--------------------------------|-------------------------------------------------------|-------------------------|--------------------------|-------------------------------|
| | | | | | | | | |
| SCR-55H | - | - | - | - | - | HC-7206 | GP-10S | GA-4 |
| - | SCR-102H | - | SCR-102FP | SCR-102XA | SCR-102XCE | HC-7206 | GF-10B | GA-2 |
| - | SCR-106H | - | SCR-106FP | SCR-106XA | SCR-106XCE | HC-7206 | GF-10B | GA-2 |
| - | SCR-1010H | - | SCR-1010FP | SCR-1010XA | SCR-1010XCE | HC-7206 | GF-10B | GA-2 |
| - | SCR-154H | - | SCR-154FP | SCR-154XA | SCR-154XCE | HC-7206 | GP-10S | GA-2 |
| - | SCR-156H | - | SCR-156FP | SCR-156XA | SCR-156XCE | HC-7206 | GP-10S | GA-2 |
| - | SCR-252H | - | SCR-252FP | SCR-252XA | SCR-252XCE | HC-7206 | GF-20B | GA-2 |
| - | SCR-254H | - | SCR-254FP | SCR-254XA | SCR-254XCE | HC-7206 | GF-20B | GA-2 |
| - | SCR-256H | - | - | SCR-256XA | SCR-256XCE | HC-7206 | GF-20B | GA-2 |
| - | - | SCR-2514H | - | SCR-2514XA ¹⁾ | - | HC-7206 | GF-20B | GA-2 |
| - | - | SCR-506H | - | SCR-506XA ¹⁾ | - | HC-7206 | GF-50B | GA-2 |
| - | SCL-101H | - | SCL-101FP | SCL-101XA | - | HC-7206 | GF-10B | GA-2 |
| - | SCL-201H | - | SCL-201FP | SCL-201XA | - | HC-7206 | GF-230B | GA-2 |
| - | SCL-302H | - | SCL-302FP | SCL-302XA | SCL-302XCE | HC-7206 | GF-230B | GA-2 |
| - | SCL-502H | - | SCL-502FP | SCL-502XA | SCL-502XCE | HC-7206 | GF-510B | GA-2 |
| - | - | SCL-1002H | - | - | SCL-1002XCE | HC-7206 | GF-510B | GA-2 |
| SCH-121H | - | - | - | - | - | HB-7206 | GF-120B | GA-4 |
| - | SCH-202H | - | SCH-202FP | SCH-202XA | SCH-202XCE | HC-7206 | GF-813B | GA-3 |
| - | SCH-302H | - | SCH-302FP | SCH-302XA | SCH-302XCE | HC-7206 | GF-813B | GA-3 |
| - | - | SCH-603H | - | SCH-603XA ¹⁾ | SCH-603XCE | HC-7206 | GF-813B | GA-3 |
| - | - | SCH-1003H | - | - | - | HC-7206 | GP-10S | GA-2 |

¹⁾ With XA-12 air pump.

²⁾ Cordless Pump includes 230V Charger. For 115V charger replace the "E" by the "B" in the model number.

▼ From left to right: P-142ALSS, P-392ALSS, V-152NV, V-66NV, RC-256NV, RC-106NV, RC-53NV



- Corrosion resistant, nickel-plated valves and cylinders
- Stainless steel pump inserts will not corrode
- Viton® Seals provide heat and chemical resistance
- Anodized aluminum pump reservoirs and plastic encapsulated pump bodies resist wet environments
- Two-speed operation reduces pump handle strokes 78% compared to single-speed pumps
- Pump handles lock for easy carrying.

RC, P, V Series

Cylinder Capacity:
5 - 25 ton

Stroke:
51 - 156 mm

Maximum Operating Pressure:
700 bar



Applications



For use in wet environments such as food processing, pulp and paper, mining, construction and applications in high temperature or in welding areas.







Multifluid Hand Pumps

MP-Series corrosion resistant hand pumps for low pressure filling and high pressure testing applications, suitable for a wide range of fluids.

Page: **78**

|  | Cylinder Capacity | Stroke | Model Number * | Oil Capacity | Pressure Rating | Collapsed Height | Extended Height | Outside Diameter |  |
|-------------------------------------------------------------------------------------|-------------------|--------|----------------|--------------------|-----------------|------------------|-----------------|------------------|---------------------------------------------------------------------------------------|
| | ton (kN) | (mm) | | (cm ³) | (bar) | (mm) | (mm) | (mm) | (kg) |
| | 5 (45) | 76 | RC-53NV | 50 | 700 | 165 | 241 | 38 | 1,5 |
| | 10 (101) | 51 | RC-102NV | 78 | 700 | 121 | 175 | 57 | 2,3 |
| | 10 (101) | 156 | RC-106NV | 225 | 700 | 247 | 403 | 57 | 4,4 |
| | 25 (232) | 156 | RC-256NV | 528 | 700 | 273 | 431 | 85 | 10,0 |

|  | Pump Type | Oil Capacity | Model Number * | Pressure Rating | Oil Displacement per Stroke | Port Dimension | Piston Stroke |  |
|-------------------------------------------------------------------------------------|-----------|--------------------|----------------|-----------------|-----------------------------|----------------|---------------|---------------------------------------------------------------------------------------|
| | | (cm ³) | | (bar) | (cm ³) | (NPTF) | (mm) | (kg) |
| | Two Speed | 327 | P-142ALSS | 14 / 700 | 3,62 / 0,90 | 1/4"-18 | 12,7 | 2,0 |
| | | 901 | P-392ALSS | 14 / 700 | 11,26 / 2,47 | 3/8"-18 | 25,4 | 4,1 |

|  | Valve Type | Model Number * | Function | Pressure Rating (bar) |  |
|-------------------------------------------------------------------------------------|-----------------------|----------------|--------------------------------------------|-----------------------|---------------------------------------------------------------------------------------|
| | Manual Check Valve | V-66NV * | Load holding with cylinders | 700 | 1,8 |
| | Pressure Relief Valve | V-152NV * | Limits system pressure, ± 3% repeatability | 55-700 | 1,6 |

* For cylinder details see pages 7-9; for pump details see pages 72-73; for valve details see pages 136-137.

Power Box – Portable Tool Sets

▼ SCR154PGH



- Easy to carry sturdy tool box
- Complete and ready-to-use hydraulic sets
- Includes a single-acting cylinder, P-392 two-speed lightweight hand pump, gauge adaptor assembly, 1,8 metre hose and couplers
- All components ship inside tool box as one package.

**SC,
SL,
SR,
SW
Series**



Capacity:

1 - 45 ton

Stroke:

11 - 156 mm

Maximum Operating Pressure:







700 bar



Gauge Adaptor Assembly

Power Box Sets include 45 degree angled gauge adaptor assembly for improved safe working conditions.

Page: 134

| | Cylinder Model | Cylinder Stroke (mm) | Cylinder Capacity ton (kN) |  (kg) | Power Box Model Number |
|-------------------------------------------------------------------------------------|----------------------------------|----------------------|----------------------------|------------------------------------------------------------------------------------------|------------------------|
|  | Lifting Wedge | | | | |
| | LW-16 | 21 | 16 (157) | 9,0 | SLW16PGH |
|  | Wedge Spread Cylinder | | | | |
| | WR-5 | 94 ¹⁾ | 1,0 (8,9) | 12,0 | SWR5PGH |
|  | General Purpose Cylinders | | | | |
| | RC-102 | 54 | 10 (101) | 12,3 | SCR102PGH |
| | RC-106 | 156 | 10 (101) | 14,4 | SCR106PGH |
| | RC-154 | 101 | 15 (142) | 15,0 | SCR154PGH |
| | RC-156 | 152 | 15 (142) | 16,8 | SCR156PGH |
|  | Low Height Cylinders | | | | |
| | RCS-101 | 38 | 10 (101) | 14,1 | SCL101PGH |
| | RCS-201 | 45 | 20 (201) | 15,0 | SCL201PGH |
|  | Flat-Jac® Cylinders | | | | |
| | RSM-100 | 11 | 10 (101) | 11,4 | SRS100PGH |
| | RSM-200 | 11 | 20 (201) | 13,1 | SRS200PGH |
| | RSM-300 | 13 | 30 (295) | 14,5 | SRS300PGH |
| | RSM-500 | 16 | 45 (435) | 16,8 | SRS500PGH |

¹⁾ Maximum spread of WR-5.

▼ The Power Box – the portable tool set – applicable everywhere



▼ Shown from left to right: JHA-356, JHA-156



JH, JHA Series

Capacity:
7 - 150 ton

Stroke:
76 - 155 mm

Maximum Operating Pressure:
700 bar

- All-directional operation on 7, 15 and 35 ton JHA-series
- Internal relief valve to prevent overloading
- Machined flat front and bottom surfaces permit flush alignment in tight corners
- Chrome plated plungers
- Pumping handle included
- Automatic by-pass port to prevent over-extension (JH-series).



Lifting Wedge and Machine Lifts

Ideal to lift the load the first few centimeters. The LW-16 Lifting Wedge requires a very small access gap of only 10 mm.


Page: **172**



Load Skates

For moving heavy loads easily and safely.

Page: **174**

| Style | Jack Capacity ton (kN) | Stroke (mm) | Model Number | Jack Effective Area (cm ²) | Collapsed Height (mm) | Extended Height (mm) | Bottom Plate Dimensions W x L (mm) | Plunger Diameter (mm) | Pump Speed |  (kg) |
|-----------------|---------------------------|----------------|-----------------|-------------------------------------------|--------------------------|-------------------------|------------------------------------------|--------------------------|------------|-----------------------------------------------------------------------------------------------|
| Aluminium Jacks | 7 (62) | 76 | JHA-73 | 9,6 | 133 | 209 | 73 x 158 | 30,2 | Single | 5,0 |
| | 15 (133) | 153 | JHA-156 | 20,3 | 247 | 401 | 92 x 238 | 41,4 | Single | 13,2 |
| | 35 (311) | 155 | JHA-356 | 45,6 | 257 | 412 | 117 x 254 | 54,1 | Single | 18,1 |
| | 75 (667) | 153 | JHA-756 | 102,6 | 285 | 439 | 174 x 325 | 114,3 | Single | 42,6 |
| | 150 (1335) | 155 | JHA-1506 | 197,9 | 327 | 482 | 241 x 407 | 158,8 | 2-Speed | 95,3 |
| Steel Jacks | 30 (267) | 155 | JH-306 | 38,3 | 254 | 409 | 95 x 242 | 69,9 | Single | 26,8 |
| | 50 (445) | 154 | JH-506 | 62,1 | 260 | 414 | 127 x 258 | 88,9 | 2-Speed | 40,8 |
| | 100 (890) | 153 | JH-1006 | 133,1 | 287 | 440 | 181 x 328 | 130,1 | 2-Speed | 74,4 |

Industrial Steel Bottle Jacks

▼ Shown: GBJ010A, GBJ030A, GBJ003A



GBJ Series



Capacity:

2 - 100 ton

Stroke:


62 - 460 mm



Screw Extension Feature

Heat treated, adjustable extension screw with cleated saddle on selected GBJ models helps adjusting and prevents slipping.


- Lower handle effort reduces operator fatigue
- Fully serviceable
- High-strength beam and pump linkage for long life
- Pumping handle included on all models
- Safety relief valve to prevent overload
- Automatic by-pass port to prevent over-extension
- Wiper seal for extended life
- Thick base material with large area for increased strength and stability during lifting
- Positioning handle on 20 ton through 50 ton models.



Cylinder-Pump Sets

As an alternative to bottle jacks where the operator is required to stand remote from the jacking point, see our range of cylinder-pump sets.

Page: **58**

| Capacity ton (kN) | Stroke (mm) | Model Number | Screw Extension (mm) | Min. Height (mm) | Max. Height (mm) | Plunger diameter (mm) | Saddle Diameter (mm) | Bottom Dimensions W x L (mm) |  (kg) |
|----------------------|----------------|-----------------|----------------------------|------------------------|------------------------|-----------------------------|----------------------------|---------------------------------------|--------------------------------------------------------------------------------------------|
| 2 (19,6) | 460 | GBJ002LA | - | 570 | 1030 | 29 | - | 75 x 116 | 6,0 |
| 2 (19,6) | 100 | GBJ002A | 165 | 168 | 338 | 24 | 23,5 | 75 x 116 | 3,6 |
| 3 (29,4) | 105 | GBJ003A | 65 | 168 | 338 | 24 | 23,5 | 75 x 116 | 3,7 |
| 5 (49,0) | 150 | GBJ005A | 75 | 212 | 437 | 29 | 28,5 | 75 x 125 | 4,5 |
| 8 (78,4) | 150 | GBJ008A | 75 | 219 | 444 | 37 | 38,0 | 90 x 114 | 6,2 |
| 10 (98,0) | 150 | GBJ010A | 75 | 219 | 444 | 37 | 38,0 | 90 x 114 | 6,4 |
| 10 (98,0) | 62 | GBJ010SA | 30 | 131 | 223 | 37 | 38,0 | 90 x 114 | 5,0 |
| 15 (147,0) | 150 | GBJ015A | 75 | 228 | 453 | 45 | 45,0 | 112 x 163 | 8,8 |
| 20 (196,0) | 150 | GBJ020A | 75 | 234 | 459 | 51 | 61,0 | 120 x 172 | 10,6 |
| 20 (196,0) | 105 | GBJ020SA | 55 | 190 | 350 | 51 | 61,0 | 120 x 172 | 9,5 |
| 30 (294,0) | 150 | GBJ030A | 75 | 242 | 467 | 58 | 69,0 | 144 x 196 | 15,5 |
| 50 (490,0) | 150 | GBJ050A | - | 252 | 402 | 80 | 80,0 | 180 x 230 | 27,0 |
| 100 (980,0) | 150 | GBJ100 | - | 300 | 450 | 110 | 94,0 | 296 x 333 | 87,0 |

All GBJ Jacks meet or exceed: ANSI, PALD, CE.

▼ Enerpac heavy-duty bottle jacks make lifting loads easier.



▼ Shown: PRASA10027L and accessory Locking U-Rings



Safe, Efficient, Mobile Load Lifting



Pendant cord

Supplied with 3,5 m pendant cord for air driven units with pneumatic valves and 6 m pendant cord for electric driven units keeps operator away from the load.

- 54, 90, 136 and 181 ton capacities with pneumatic or electric pumps for the toughest jobs
- 102 mm ground clearance for transport over rail and rough terrain
- Double-acting cylinder
- Three position handle provides easy tilt back and transport
- Complies with ASME/ANSI B30:1 2015 and CE specifications
- Easy to change external filter minimizes down time
- Rugged, fully enclosed 610 mm wide frame with no exposed fittings or hoses
- SUP-R-STACK™ Extension System allows lifting at all heights without blocking.



POW'R LOCK – Self-Locking Mobile Lift System


A self-locking jack that performs automatic locking during lifting, lowering and holding.

See the Enerpac PL-Series

Page: **66**



◀ Enerpac POW'R-RISER® used in mining operations to lift heavy equipment.

| Capacity ton (kN) | Stroke (mm) | Model Number with Electric Pump (230V - 1 ph - 50Hz) |  (kg) |
|----------------------|----------------|------------------------------------------------------------|-----------------------------------------------------------------------------------------------|
| 54 (533) | 356 | PREME06014L | 177 |
| | 686 | PREME06027L | 272 |
| 90 (889) | 406 | PREME10016L | 231 |
| | 686 | PREME10027L | 272 |
| | 406 | - | - |
| | 686 | - | - |
| 136 (1333) | 394 | - | - |
| | 673 | - | - |
| | 394 | PREME15016L | 258 |
| | 673 | PREME15027L | 321 |
| 181 (1778) | 388 | - | - |
| | 617 | - | - |

POW'R-RISER® Lifting Jack



SUP-R-STACK Extensions

Increase useful height from 127 to 457 mm.

| Model No. | Size (mm) | Model No. | Size (mm) |
|-----------|-----------------------------------------------------|-----------|-----------|
| PRE5 | 127 | PRE11 | 279 |
| PRE7 | 178 | PRE14 | 356 |
| PRE9 | 229 | PRE18 | 457 |
| PRES6024 | Extension set includes PRE5, PRE7, PRE11 and PRE18. | | |



Spacers

Fine tune your extension stack height.

| Model No. | Size (mm) | Model No. | Size (mm) |
|-----------|--------------------------------------------------|-----------|-----------|
| PRS1 | 25 | PRS3 | 76 |
| PRS2 | 51 | - | - |
| PRS4 | Set includes (2x) PRS1, (1x) PRS2 and (1x) PRS3. | | |

PR Series



Rated Lifting Capacity:

54 - 181 ton

Stroke:

356 - 686 mm

Maximum Operating Pressure:


700 bar

| Cap. (kN) | Swivel Load Saddle | Locking U-Rings | | | | | Set Model Number | Locking U-Ring Sets Include: | | | |
|-----------|--------------------|-----------------|--------|--------|--------|---------|------------------------|------------------------------|---------|--------|--------|
| | | 25 mm | 76 mm | 114 mm | 140 mm | 254 mm | | Quantity & model numbers | | | |
| 533 | PRTS60 | PRU11 | PRU13 | PRU14 | - | PRU110 | ¹⁾ PRUS126 | PRU11 | PRU13 | PRU14 | - |
| | | | | | | | ²⁾ PRUS137 | PRU11 | PRU13 | PRU14 | PRU110 |
| 889 | PRTS60 | PRU11 | PRU13 | PRU14 | - | PRU110 | ¹⁾ PRUS126 | PRU11 | PRU13 | PRU14 | - |
| | | | | | | | ²⁾ PRUS137 | PRU11 | PRU13 | PRU14 | PRU110 |
| 1333 | PRTS150 | PRU151 | PRU153 | - | PRU155 | PRU1510 | ³⁾ PRUS1526 | PRU151 | PRU153 | PRU155 | - |
| | | | | | | | ²⁾ PRUS1537 | PRU151 | PRU1510 | PRU155 | - |
| 1778 | PRTS200 | PRU201 | PRU203 | - | PRU205 | PRU2010 | ³⁾ PRUS2026 | PRU201 | PRU203 | PRU205 | - |
| | | | | | | | ²⁾ PRUS2037 | PRU201 | PRU2010 | PRU205 | - |

¹⁾ For 356 mm and 406 mm stroke models

²⁾ For 686 mm stroke models

³⁾ For 394 mm stroke models.

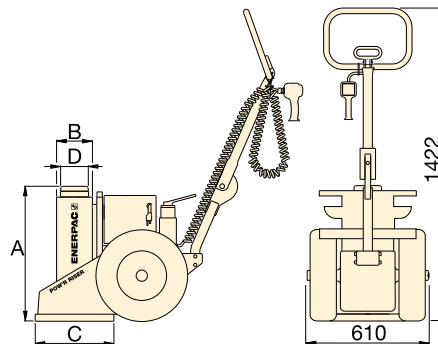

WARNING!

Extensions: Any two extensions may be stacked for loads up to 54 ton. For loads over 54 ton or strokes over 356 mm only one extension and one spacer can be used.

Spacers: Never exceed 76 mm in total spacer height.

| Model Number with Air Pump | (kg) | A (mm) | B (mm) | C (mm) | D (mm) | Max. Additional Stack Height Using Optional Extension (mm) | Valve Type |
|----------------------------|------|--------|--------|--------|--------|------------------------------------------------------------|------------|
| PRAMA06014L | 177 | 610 | 162 | 356 | 102 | 813* | Manual |
| PRAMA06027L | 272 | 940 | 162 | 356 | 102 | 279 | |
| PRAMA10016L | 231 | 660 | 178 | 457 | 102 | 533** | |
| PRAMA10027L | 272 | 940 | 178 | 457 | 102 | 279 | |
| PRASA10016L | 231 | 660 | 178 | 457 | 102 | 533** | Pneumatic |
| PRASA10027L | 272 | 940 | 178 | 457 | 102 | 279 | |
| PRASA15016L | 258 | 660 | 203 | 457 | 127 | 533** | |
| PRASA15027L | 321 | 940 | 203 | 457 | 127 | 279 | Manual |
| - | - | 660 | 203 | 457 | 127 | 533** | |
| - | - | 940 | 203 | 457 | 127 | 279 | |
| PRASA20016L | 290 | 660 | 241 | 508 | 165 | 533** | Pneumatic |
| PRASA20027L | 374 | 940 | 241 | 508 | 165 | 279 | |

* Based on one 457 mm and one 279 mm extension and one 76 mm spacer.

** Based on one 457 mm extension and one 76 mm spacer.

www.enerpac.com

For power source, the following characters should be inserted in the 5th space of the model number.

Ordering Example:

Model No. PREME06014L is a 356 mm stroke, 54 ton model, with a manual valve and a 230 VAC, 1-ph, 50 Hz electric motor.

A Air Pump, 1416 l/min air consumption at 5,5 bar

B 115 VAC, 1-ph., 50-60 Hz, 20 A

E 208-240 VAC, 1-ph., 50-60 Hz, Euro Plug, 10 A

I 208-240 VAC, 1-ph., 50-60 Hz, USA Plug, 10 A

G ¹⁾ 208-240 VAC, 3-ph., 50-60 Hz

W ¹⁾ 380-415 VAC, 3-ph., 50-60 Hz

J ¹⁾ 440-480 VAC, 3-ph., 50-60 Hz

R ¹⁾ 575 VAC, 3-ph., 50-60 Hz.

¹⁾ Not available for 54 ton capacity.

▼ Shown: PL20025-ASA and PL20014-ASA



- Provides continuous locking protection during lift, lower and hold functions
- Patent-pending control technology synchronizes cylinder and lock nut for smooth and efficient lifting and lowering
- Unique double-acting cylinder offers a low collapsed height to accommodate more lifting applications
- Simple 2-button pendant allows operation of raise and lower functions from up to 6,1 metres away
- All load-bearing cylinder components have a nitrocarburized treatment to improve wear characteristics and resist corrosion
- Ergonomic handle has six positions for comfortable handling and folds when not in use
- Meets ANSI/ASME B30.1-2015, AS/NZS-2538, AS/NZS-2693 certification criteria.



Efficient Lifting with Continuous Automatic Load Locking



POW'R-LOCK™ Self-Locking Lift System

Only the POW'R-LOCK™ Lift System provides continuous positive locking of the load through all stages of lifting and lowering. No operator intervention is required to activate or de-activate the automatic locking system.

Two different stroke lengths are available. Both models are powered by an external compressed air system (user-supplied).

A convenient two-button pendant controls operation of the Lift System's air motor and directional control valve.



Tilt Load Cap

All POW'R-LOCK™ Lift System models feature a Tilt Load Cap to reduce side-loading.



Safety First

When lifting large, heavy vehicles certain precautions must be followed. Follow your published safety directions for lifting and cribbing your loads. The Pow'R-LOCK™ Lift System provides load/lock protection, but you must follow the safety directions for load cribbing operations.

◀ The PL-Series POW'R-LOCK™ Portable Lift System.

POW'R-LOCK™ Mobile Lift System



Accessories

Flat Load Cap – Non-tilt load cap has lower profile for tight lifting spaces.

Spacers – Minimize gap between load cap and lifting point to maximize hydraulic stroke of the jack.

Extensions – Stackable, with large alloy steel locating studs to resist effects of side-loading.

Extension Base Adapter – Extension Base Adapter design eliminates risk of improper stacking when using more than one extension.

PL Series



Rated Lifting Capacity:

181 ton

Stroke:

356 - 622 mm

Maximum Operating Pressure:

700 bar

| Model Number | Description | Height (mm) | PL20014-ASA | PL20025-ASA |
|--------------|------------------------|-------------|-------------|-------------|
| PLC1 | Flat Load Cap | 34 | x | x |
| PLS1 | Spacer | 26 | x | x |
| PLS2 | Spacer | 51 | x | x |
| PLE5 | Extension | 127 | x | x |
| | PLE7 | Extension | 178 | x |
| | PLE9 | Extension | 229 | x |
| | PLE11 | Extension | 280 | x |
| | PLE14 | Extension | 356 | x |
| PLB12 | Extension base adapter | 305 | x | - |




WARNING!

PLE11 and **PLE14** Extensions and **PLB12** Extension Base Adapter are to be used with the "short" model **PL20014-ASA** only. Use of these extensions on the "tall" model **PL20025-ASA** will result in an excessive maximum lifting height. Load could become unstable and drop, resulting in possible personal injury and/or property damage.

| Model Number | Maximum Additional Stack Height * |
|---------------------|-----------------------------------|
| PLS20014-ASA | 712 mm |
| PLS20025-ASA | 229 mm |

* Using optional PLB and PLE-Series extensions and PLS-Series spacers. Load cap height is NOT included in the stack height.

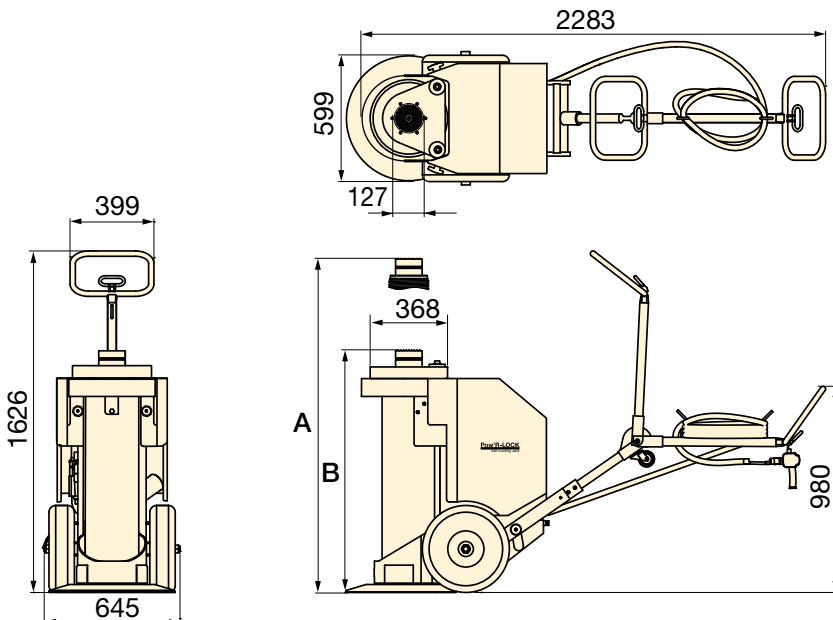

PR-Series, POW'R-RISER® Mobile Lifting Jack

When automatic load-locking is not required, the POW'R-RISER® jack provides a mobile lifting solution.

Page: 64

| Capacity ton (kN) | Stroke (mm) | Model Number with Air Pump | Cylinder Lifting Speed ¹⁾ (mm/min) | | Recommended Air Supply ²⁾ | | A ³⁾ (mm) | B ³⁾ (mm) | (kg) |
|-------------------------|----------------|----------------------------|--------------------------------------------------|---------|--------------------------------------|-----------|-------------------------|-------------------------|------|
| | | | Load | No Load | (l/min) | (bar) | | | |
| 181 (1779) | 356 | PL20014-ASA | 51 | 61 | 3681 - 4247 | 3,8 - 6,9 | 1219 | 864 | 501 |
| | 622 | PL20025-ASA | 51 | 61 | | | 1778 | 1156 | 599 |

¹⁾ Depending on available airflow, regulator setting, pump speed and load weight.

²⁾ Minimum dynamic air pressure of 3,8-4,1 bar. 6,2-6,9 bar required to achieve 1779 kN capacity.

³⁾ Height A and B are with Swivel Load Cap installed. Subtract 51 mm if flat load cap is used.

There's no substitute for experience in customizing hydraulic cylinders and Enerpac meets the needs of the most demanding applications.

Cylinders are the primary workhorse in hydraulic systems required to push or pull. Although Enerpac offers a wide variety of cylinders to fit many application requirements, there are many applications that require customization.

These may include special corrosion protection, ability to handle extreme side loads, or having special mounting needs.



◀ Large capacity, double-acting lock nut cylinders with an external lock ring used for bridge work.



◀ Double-acting cylinders with pilot-operated check valves and rod eyes on both ends for lifting and positioning applications.



◀ Custom private-label cylinders for OEM applications.

Overview Custom Cylinders



▲ Custom 500 ton double-acting cylinders with 1.83 m stroke for lifting electric rope shovels.

CUSTOMIZABLE FEATURES:

- Stroke
- Capacity
- Paint
- Pressure Rating
- Fitting
- Special Attachments
- Seals
- Imbedded Sensors
- Collapsed Height
- Rod Modifications
- Special Mounting
- Corrosion Resistance

Enerpac offers a wide variety of hydraulic pumps for all your custom needs. Still, many applications require a customized pump to operate the system.

Hydraulic pumps are at the heart of any hydraulic system. Different systems require different flow, pressure and control.

Enerpac offers a wide variety of hydraulic pumps from small hand-operated pumps to large gasoline-powered pumps.

Still, many applications require a customized pump to operate the system. These may include larger reservoir capacity, custom valve configurations or added electrical controls. Enerpac also specializes in power units and controls used for synchronous lifting/lowering of multiple jacking points.



◀ *Private-label hand or foot pumps with fire-resistant oil and special exterior paint.*



◀ *XC-Series Cordless Pump with custom black shroud for private-label OEM customer to be used with a variety of hand held hydraulic tools.*



◀ *Electric pump with large cooler and controls for high-temperature applications.*

Overview Custom Pumps



▲ *Custom hydraulic pump for a bridge deck launching system.*

CUSTOMIZABLE FEATURES:

- Reservoir and Frame
- Valves
- Controls
- Oil
- Seals
- Pressure and Flow
- Coolers and Heaters
- Paint
- Motor Type

Enerpac hydraulic pumps are available in over 1000 different configurations. Whatever your high-pressure pump needs are... speed, control, intermittent or heavy duty cycle you will find an Enerpac pump suited to the application.

Featuring Hand, Battery, Electric, Air and Gasoline powered models, with multiple reservoir and valve configurations, Enerpac offers the most comprehensive pump line available.



Pump Selection

For help in selecting the correct pump for your application, please view our 'Yellow Pages'.

If you require further assistance, contact the Enerpac office located near you.

Page: 266






















Torque Wrench Pumps

System matched air and electric pumps provide control to operate Enerpac Torque Wrenches.

Page: 212



Pumps and Directional Valves Section Overview

| Power Source | Pump Types | Maximum Reservoir Capacity (litres) | Max. Flow at Rated Pressure (l/min) | Max. Power Consumption | Series | Image | Page |
|-----------------------------------|------------------------------------------------------------------------|-------------------------------------|------------------------------------------|------------------------|----------------------|---------------------------------------------------------------------------------------|--------------|
| Manual | Lightweight Hand Pumps Exclusively from Enerpac | 2,5 | 2,50 (cm ³ /stroke) | – | P |  | 72 ▶ |
| | ULTIMA Steel Hand Pumps | 7,4 | 4,75 | – | P |  | 74 ▶ |
| | Low Pressure Hand Pumps | 3,3 | 9,50 | – | P |  | 76 ▶ |
| | Multifluid Hand Pumps Pumping Fluids up to 1000 bar | – | 20,6 (cm ³ /stroke) | – | MP |  | 78 ▶ |
| | Foot Pump For Hands Free Operation | 0,5 | 2,47 (cm ³ /stroke) | – | P |  | 79 ▶ |
| | Ultra-High Pressure Hand Pumps Pressure up to 2800 bar | 1,0 | 2,49 (cm ³ /stroke) | – | P 11 |  | 80 ▶ |
| Electric | Battery Powered Hydraulic Pumps Cordless Hydraulic Power | 2,0 | 0,25 | 0,37 (kW) | XC |  | 82 ▶ |
| | Economy Series Compact and Portable | 3,8 | 0,32 | 0,37 (kW) | PU |  | 84 ▶ |
| | Submerged Series Powerful and Low-Noise | 5,5 | 0,27 | 0,37 (kW) | PE |  | 86 ▶ |
| | Z-Class Pumps, Portable | 40 | 1,0 | 1,25 (kW) | ZU |  | 92 ▶ |
| | Z-Class Pumps Powerful and Heavy-Duty | 40 | 2,73 | 5,60 (kW) | ZE |  | 98 ▶ |
| Air | Air Hydraulic Pumps Single and Twin-Air Motor | 1,3 | 0,13 | 255 (l/min) | PA |  | 104 ▶ |
| | | 8,0 | 0,15 | 510 (l/min) | PAM |  | 105 ▶ |
| | Turbo II Air Hydraulic Pumps Compact Air Over Hydraulic | 5,0 | 0,16 | 340 (l/min) | PAT |  | 106 ▶ |
| | Air Hydraulic Pumps For Productivity and Ergonomics | 2,0 | 0,25 | 991 (l/min) | XA |  | 108 ▶ |
| | Z-Class Air Hydraulic Pumps Modular Air Pumps | 40,0 | 1,31 | 2840 (l/min) | ZA |  | 110 ▶ |
| Gasoline | Z-Class Gasoline Hydraulic Pumps Gas Powered High Flow Pumps | 40,0 | 1,64 | 4,8 (kW) | ZG5 |  | 112 ▶ |
| | Z-Class Gasoline Hydraulic Pumps Gas Powered High Flow Pumps | 40,0 | 3,30 | 9,7 (kW) | ZG6 |  | 112 ▶ |
| Directional Control Valves | | | | | VM, VC VE |  | 114 ▶ |

P-Series, Lightweight Hand Pumps

▼ Shown from top to bottom: P-802, P-842, P-202, P-142



- Lightweight and compact design
- Durable glass-filled nylon reservoir and nylon encapsulated aluminium pump base for maximum corrosion resistance
- Two-speed operation reduces handle strokes by as much as 78% over single speed pumps
- Lower handle effort to minimize operator fatigue
- Integral 4-way valve on P-842 for operation of double-acting cylinders
- Handle lock and lightweight construction for easy carrying
- Large oil capacities to power a wide range of cylinders or tools
- Non-conductive fiberglass handle for improved operator safety
- Internal pressure relief valve for overload protection.

▼ Cylinder-pump set SCR-254H used to support the construction while monitoring pressure and load with the gauge.



Exclusively from Enerpac



Cylinder Matching Chart

For help in selecting the correct hand pump for your application, please refer to the Cylinder Matching Chart located in the 'Yellow Pages'.

Page: 266



Speed Chart

To determine how a specific pump will operate your cylinder, see the Pump-Cylinder Speed Chart in the 'Yellow Pages'.

Page: 273



Tank Kits:

When a return-to-tank port is required, the Tank Kits provide a 7/16"-20 UN port at the rear of the reservoir.

| | |
|-------|--------------------------|
| PC-20 | Fits P-141, P-142 |
| PC-25 | Fits P-202, P-391, P-392 |



Power Box

Portable tool box with P-392 hand pump, gauge adaptor assembly, hose and RC-, RCS, RSM- or WR-Series cylinder.


Page: 61

| Pump Type | Usable Oil Capacity (cm ³) | Model Number | Pressure Rating ²⁾ (bar) | | Oil Displacement per Stroke (cm ³) | | Max. Handle Effort (kg) |
|--------------|-------------------------------------------|---------------------|----------------------------------------|-----------------------|---------------------------------------------------|-----------------------|----------------------------|
| | | | 1 st stage | 2 nd stage | 1 st stage | 2 nd stage | |
| Single-Speed | 327 | P-141 | - | 700 | - | 0,90 | 32,7 |
| | 901 | P-391 | - | 700 | - | 2,47 | 38,6 |
| Two-Speed | 327 | P-142 ¹⁾ | 13 | 700 | 3,62 | 0,90 | 35,4 |
| | 901 | P-202 | 13 | 700 | 3,62 | 0,90 | 28,6 |
| | 901 | P-392 ¹⁾ | 13 | 700 | 11,26 | 2,47 | 42,2 |
| | 2540 | P-802 | 27 | 700 | 39,33 | 2,47 | 43,1 |
| | 2540 | P-842 ³⁾ | 27 | 700 | 39,33 | 2,47 | 43,1 |

¹⁾ Available as set, see note on next page. P-392 also available in Power Box Set (page 61).

²⁾ Contact Enerpac for applications where operating pressure is less than 10% of pressure rating.

³⁾ P-842 for use with double-acting cylinders



Pump-Cylinder Sets

All pumps marked with an * are available as sets (pump, cylinder, gauge, couplers and hose) for your ordering convenience.

Page: 58

P Series



Reservoir Capacity:


327 - 2540 cm³

Flow at Rated Pressure:


0,90 - 2,47 cm³/stroke

Operating Pressure:


700 bar

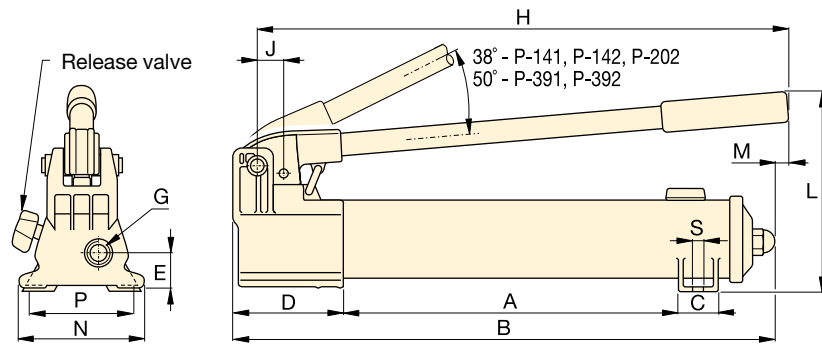

P-141, P-142, P-202, P-391, P-392

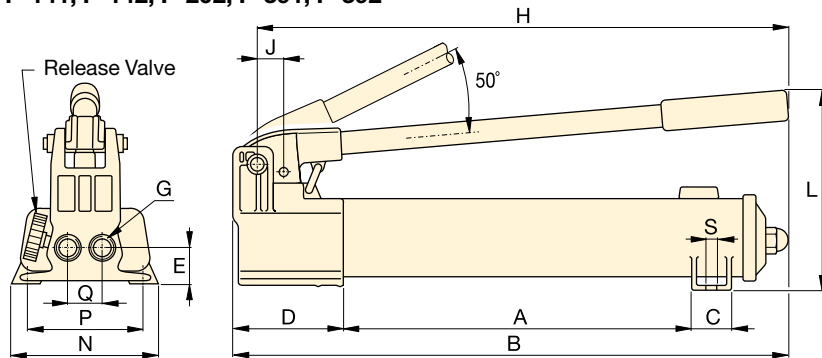

P-802

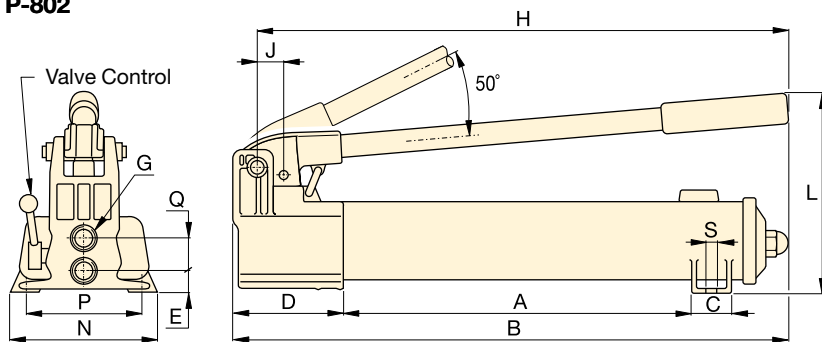

P-842



Hoses

Enerpac offers a complete line of high quality hydraulic hoses. To ensure the integrity of your system, specify only genuine Enerpac hydraulic hoses.

Page: 122



GA45GC Gauge Adaptor

Protect yourself from system overloading by simply ordering one part number for a pre-assembled gauge, adaptor block and coupler.

Page: 134



Foot Pump P-392FP

For handsfree operation the lightweight and robust P-392FP Foot Pump is the perfect choice.

Page: 79

| Piston Stroke | Dimensions (mm) | | | | | | | | | | | | | | | Model Number |
|---------------|-----------------|-----|----|-----|----|--------------|-----|----|-----|----|-----|-----|----|----|------|----------------------------|
| | (mm) | A | B | C | D | E | G | H | J | L | M | N | P | Q | S | |
| 12,7 | 185 | 336 | 28 | 85 | 28 | 1/4"-18 NPTF | 319 | 19 | 143 | - | 95 | 80 | - | 7 | 2,4 | P-141 |
| 25,4 | 344 | 533 | 36 | 99 | 33 | 3/8"-18 NPTF | 522 | 30 | 177 | 16 | 120 | - | - | - | 4,1 | P-391 |
| 12,7 | 185 | 336 | 28 | 85 | 28 | 1/4"-18 NPTF | 319 | 19 | 143 | - | 95 | 80 | - | 7 | 2,4 | P-142 ¹⁾ |
| 12,7 | 344 | 509 | 36 | 85 | 28 | 1/4"-18 NPTF | 400 | 19 | 144 | 16 | 95 | - | - | - | 3,4 | P-202 |
| 25,4 | 344 | 533 | 36 | 99 | 33 | 3/8"-18 NPTF | 522 | 30 | 177 | 16 | 120 | - | - | - | 4,1 | P-392 ¹⁾ |
| 25,4 | 337 | 552 | 45 | 133 | 35 | 3/8"-18 NPTF | 527 | 30 | 228 | - | 181 | 153 | 35 | 10 | 8,2 | P-802 |
| 25,4 | 337 | 552 | 45 | 133 | 20 | 3/8"-18 NPTF | 527 | 30 | 228 | - | 181 | 153 | 36 | 10 | 10,0 | P-842 ³⁾ |

▼ Shown from left to right: P-77, P-80, P-84, P-801, P-39



- Reduced handle effort and ergonomic grip for less operator fatigue
- Two-speed operation for fast and easy operation (except P-39)
- Vent free reservoir eliminates spills
- Quick grip handle allows for easy transport
- Integral reservoir over-pressurization protection
- All steel construction, chrome plated plunger and wiper system for durable, long lasting performance
- 4-way valving on the P-84 and P-464 for operation of double-acting cylinders.

▼ In the absence of a power supply, the P-80 Hand Pump offers a powerful solution.



The Solution for Tough Jobs



Two Speed Pumps

Recommended for applications where cylinder plunger must advance rapidly to load contact, and applications where greater oil capacities are required, such as multiple cylinder hook-ups.



Foot Pump Conversion Kits

Convert your P-39, P-77, P-80 or P-801 to foot power with the **PC-11** Kit. Includes instructions for easy conversion.



GA45GC Gauge Adaptor

Protect yourself from system overloading by simply ordering one part number for a pre-assembled gauge, adaptor block and coupler.

Page: 134



4-Way Control Valve

P-84 and **P-464** feature a manual 4-way control valve, designed for use with one double-acting or two single-acting cylinders. For system set-up information:

Page: 268

| Pump Type | Usable Oil Capacity (cm ³) | Model Number | Pressure Rating ²⁾ (bar) | | Oil Displacement per Stroke (cm ³) | | Max. Handle Effort (kg) |
|-----------|----------------------------------------|----------------------------|-------------------------------------|-----------------------|------------------------------------------------|-----------------------|-------------------------|
| | | | 1 st stage | 2 nd stage | 1 st stage | 2 nd stage | |
| Single | 672 | P-39 | - | 700 | - | 2,46 | 39 |
| Two-Speed | 672 | P-77 | 34 | 700 | 16,39 | 2,46 | 40 |
| | 2200 | P-80 ¹⁾ | 34 | 700 | 16,39 | 2,46 | 35 |
| | 4100 | P-801 | 34 | 700 | 16,39 | 2,46 | 35 |
| | 2200 | P-84 ³⁾ | 34 | 700 | 16,39 | 2,46 | 35 |
| | 7423 | P-462 | 14 | 700 | 126,20 | 4,75 | 49 |
| | 7423 | P-464 ³⁾ | 14 | 700 | 126,20 | 4,75 | 49 |

¹⁾ Available as a set, see note on next page.

²⁾ Contact Enerpac for applications where operating pressure is less than 10% of pressure rating.

³⁾ P84, P-464 is for use with double-acting cylinders.


ULTIMA Steel Hand Pumps




Speed Chart

To determine how a specific pump will operate your cylinder, see the Pump-Cylinder Speed Chart in the 'Yellow Pages'.


Page: 273

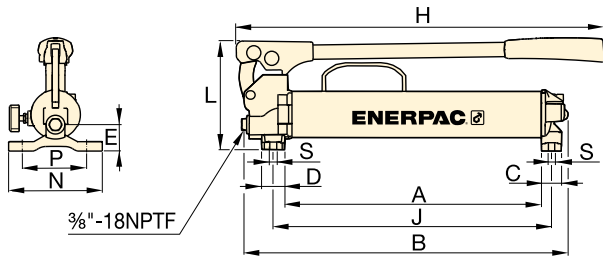

P-39, P-77

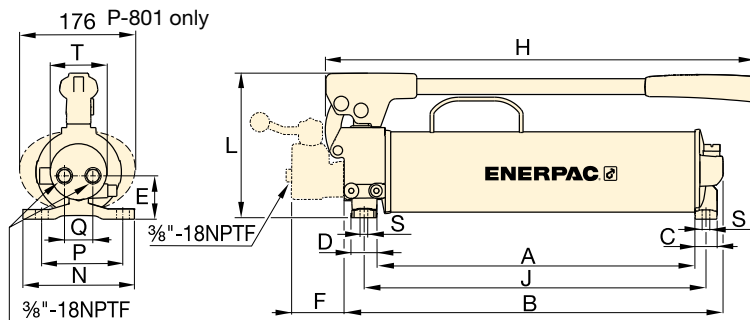

P-80, P-801, P-84

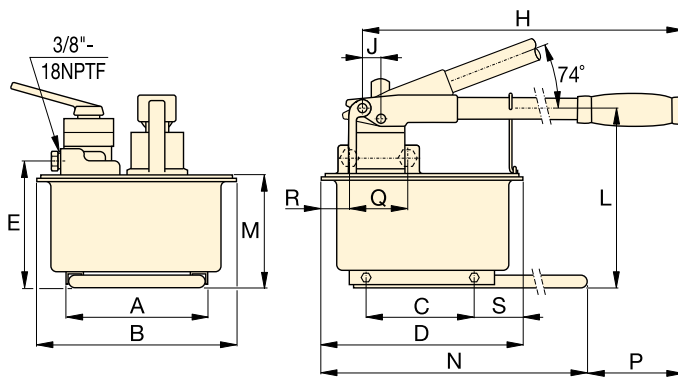

P-462, P-464

P Series



Reservoir Capacity:
672 - 7423 cm³

Flow at Rated Pressure:
2,46 - 4,75 cm³/stroke


Maximum Operating Pressure:
700 bar



Extra Capacity Hand Pumps

P-462 and P-464 feature extra large reservoirs and high first-stage flow rate.

These pumps are ideally suited for powering high-capacity cylinders.



Pump-Cylinder Sets

The P-80 is also available as set (pump, cylinder, gauge, couplers and hose) for your ordering convenience.

Page: 58



Cylinder Matching Chart

For help in selecting the correct hand pump for your application, please refer to the Cylinder Matching Chart located in the 'Yellow Pages'.

Page: 266

| Piston Stroke | Dimensions (mm) | | | | | | | | | | | | | | | | Model Number | |
|---------------|-----------------|-----|-----|-----|-----|----|-----|-----|-----|-----|-----|-----|----|----|-----|----|--------------|---------------------|
| | A | B | C | D | E | F | H | J | L | M | N | P | Q | R | S | T | | |
| 25,4 | 383 | 480 | 30 | 35 | 37 | - | 550 | 416 | 163 | - | 140 | 111 | - | - | 8,4 | - | 6,2 | P-39 |
| 25,4 | 391 | 487 | 30 | 35 | 47 | - | 550 | 424 | 163 | - | 140 | 111 | - | - | 8,4 | - | 7,1 | P-77 |
| 25,4 | 428 | 511 | 30 | 35 | 55 | - | 579 | 460 | 195 | - | 150 | 121 | 42 | - | 8,4 | 74 | 10,7 | P-80 ¹⁾ |
| 25,4 | 428 | 511 | 30 | 35 | 55 | - | 579 | 460 | 195 | - | 150 | 121 | 42 | - | 8,4 | 74 | 14,1 | P-801 |
| 25,4 | 428 | 510 | 30 | 35 | 55 | 70 | 579 | 460 | 195 | - | 150 | 121 | 38 | - | 8,4 | 74 | 11,8 | P-84 ³⁾ |
| 38,1 | 210 | 308 | 163 | 320 | 195 | - | 671 | 25 | 270 | 175 | 650 | 92 | - | - | 80 | - | 27,7 | P-462 |
| 38,1 | 210 | 308 | 163 | 320 | 195 | - | 671 | 25 | 270 | 175 | 650 | 92 | 89 | 68 | 80 | - | 27,7 | P-464 ³⁾ |

▼ Shown from left to right: P-25, P-51, P-18



When Less Than 700 Bar is All You Need



GA45GC Gauge Adaptor

Protect yourself from system overloading by simply ordering one part number for a pre-assembled gauge, adaptor block and coupler.

Page: 134



Hoses

Enerpac offers a complete line of high quality hydraulic hoses. To ensure the integrity of your system,

specify only genuine Enerpac hydraulic hoses.

Page: 122

- P-25 and P-50 pump oil in both forward and reverse handle movement improving overall efficiency, ideal when mounting space is restricted
- External load-release valve
- Internal pressure-relief valve for overload protection
- For use with single-acting cylinders and tools.

▼ P-18 hand pump used for locking the rotating table for marble polishing.



| Pump Type | Usable Oil Capacity (cm ³) | Model Number * | Pressure Rating (bar) | Oil Displacement per Stroke (cm ³) | Max. Handle Effort (kg) |
|--------------|-------------------------------------------|----------------|--------------------------|---------------------------------------------------|----------------------------|
| Single-Speed | 360 | P-18 | 200 | 2,46 | 16 |
| | 3277 | P-25 | 175 | 9,50 | 27 |
| | 3277 | P-50 | 350 | 4,75 | 27 |
| | 819 | P-51 | 200 | 4,10 | 27 |

* For use with single-acting cylinders and tools

Low Pressure Hand Pumps


P Series




Reservoir Capacity:
360 - 3277 cm³

Flow at Rated Pressure:
2,46 - 9,50 cm³/stroke


Maximum Operating Pressure:
175 - 350 bar

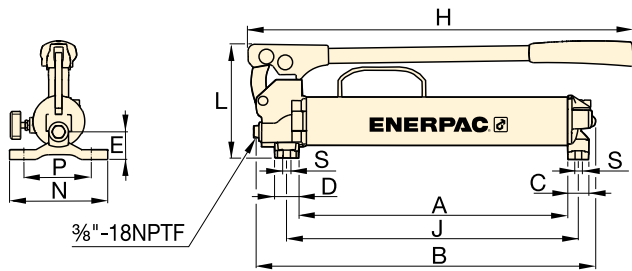

P-18

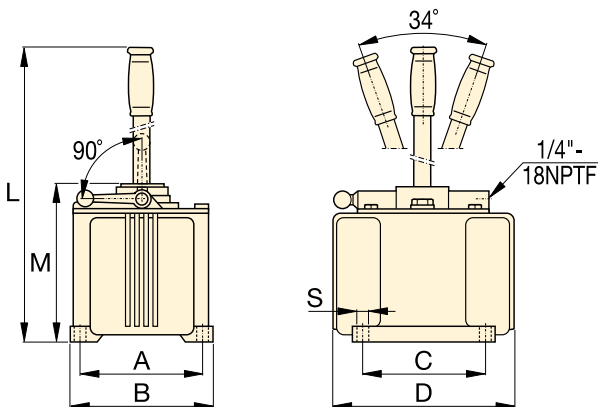

P-25, P-50

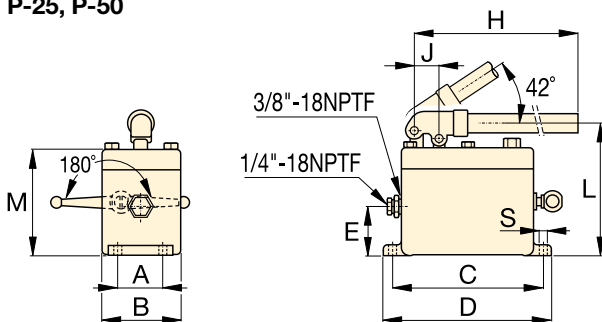

P-51



MP-Series Multifluid Hand Pumps

Corrosion resistant hand pumps for low pressure filling and high pressure testing applications, suitable for a wide range of fluids.

Page: 78

▼ P-51 hand pumps used with RC-series cylinders to keep wooden layers under pressure during lamination of plates.



| Piston Stroke | Dimensions (mm) | | | | | | | | | | | | Model Number * |
|---------------|-----------------|-----|-----|-----|----|-----|-----|-----|-----|-----|-----|------|----------------|
| | (mm) | A | B | C | D | E | H | J | L | M | N | S | |
| 25,4 | 221 | 316 | 30 | 35 | 37 | 385 | 254 | 163 | - | 140 | 8,4 | 5,0 | P-18 |
| 38,1 | 152 | 173 | 152 | 240 | - | - | - | 684 | 200 | - | 10 | 16,3 | P-25 |
| 38,1 | 152 | 173 | 152 | 240 | - | - | - | 684 | 200 | - | 10 | 16,8 | P-50 |
| 25,4 | 52 | 92 | 181 | 200 | 57 | 610 | 29 | 160 | 129 | - | 9 | 5,4 | P-51 |

MP-Series, Multifluid Hand Pumps

▼ Shown: **MP-110**



- Superior corrosion resistance
- Standard Nitrile seals – can be used for a wide range of fluids such as demineralised water, oil/water emulsions, waterglycols, mineral oils
- Two speed pumps up to 1000 bar pressure
- Buna Nitrile seals can be exchanged with optional EPDM seal for use with Skydrol or brake fluids
- Impregnated aluminium anodized pump housing with stainless steel internal pumping components
- Externally adjustable pressure relief valve
- 1/4" NPTF gauge port
- For use with single-acting cylinders and tools.

MP Series

Flow at Rated Pressure:

1,6 - 20,6 cm³/stroke

Maximum Operating Pressure:

110 - 1000 bar



Optional Reservoir Kit

Includes 10 litres tank with skid frame, top plate with reservoir seal, suction pipe and mounting bolts.


Useable oil capacity is 7,4 litres. Order model number: **MP-10T**.



Stainless Steel Hand Pump

Also available as stainless steel hand pump, model number **11-400**.

Page: **80**

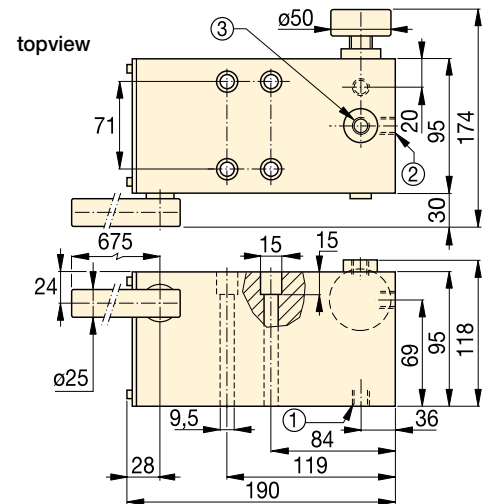



MP-110, 350, 700, 1000

- ① Suction / Tank return port 3/8"-18 NPTF
- ② Pressure port 3/8"-18 NPTF
- ③ Gauge port 1/4"-18 NPTF

| Pump Type | Usable Oil Capacity * (cm ³) | Model Number ** | Pressure Rating (bar) | | Oil Displacement per Stroke (cm ³) | | Max. Handle Effort (kg) | Piston Stroke (mm) | Weight (kg) |
|-----------|---------------------------------------------|-----------------|-----------------------|-----------|------------------------------------------------|-----------|-------------------------|--------------------|-------------|
| | | | 1st stage | 2nd stage | 1st stage | 2nd stage | | | |
| Two Speed | * | MP-110 | 35 | 110 | 52,6 | 20,60 | 45 | 27,1 | 6,6 |
| | * | MP-350 | 35 | 350 | 52,6 | 7,15 | 45 | 27,1 | 6,6 |
| | * | MP-700 | 35 | 700 | 52,6 | 2,63 | 45 | 27,1 | 6,6 |
| | * | MP-1000 | 35 | 1000 | 52,6 | 1,60 | 45 | 27,1 | 6,6 |

* MP-Pump includes 1,5 mm thick gasket for reservoir mounting. MP-Series pumps requires the use of an external reservoir.

** MP-Series pumps are for use with single-acting cylinders and tools.

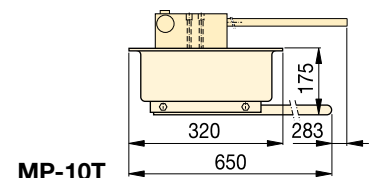

Lightweight Hydraulic Foot Pump

▼ Shown: P-392FP



- Robust, durable and compact
 - Steel frame for maximum stability
 - Steel pumping handle
 - Aluminium reservoir
- Foot pedal lock and lightweight construction for easy carrying
- Two-speed operation reduces foot pedal strokes
- Large foot-pad release valve for controlling load descent
- Internal pressure relief valve for overload protection.

P Series



Reservoir Capacity:


492 cm³

Flow at Rated Pressure:

2,47 cm³/stroke

Maximum Operating Pressure:

700 bar



Pump-Cylinder Sets

The P-392FP is available as **set** (pump, cylinder, gauge, couplers and hose) for your ordering convenience.


Page: **58**



Hoses

Enerpac offers a complete line of high quality hydraulic hoses. To ensure the integrity of your system, specify only genuine Enerpac hydraulic hoses.

Page: **122**

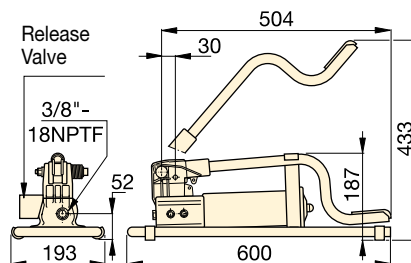

| Usable Oil Capacity (cm ³) | Model Number | Pressure Rating (bar) | | Oil Displacement per Stroke (cm ³) | | Max. Handle Effort (kg) | Piston Stroke (mm) | Piston Stroke (kg) |
|-------------------------------------------|------------------|-----------------------|-----------|------------------------------------------------|-----------|-------------------------|--------------------|--------------------|
| | | 1st stage | 2nd stage | 1st stage | 2nd stage | | | |
| 492 | P-392FP * | 15 | 700 | 11,26 | 2,47 | 42 | 25,4 | 7,0 |

* Available as set, see note on this page.

▼ P-392FP offers the advantage of hands free operation to handle and control the tool or cylinder.



Ultra-High Pressure Hand Pumps

▼ Shown from left to right: 11-100, P-2282



- Two-speed operation on the P-2282 allows for faster fill operation, reducing cycle times for many testing applications
- 303 Stainless steel construction on the 11-100 and 11-400 models enable use with many different fluids, such as distilled water, diesters, silicones, soluble oils and petroleum
- Large release knob for improved control of pressure release
- Outlet ports are 3/4"-16 cone for 2800 bar rating
- Ultra-high pressure fittings feature all stainless steel construction except adaptor 41-366 which features nickel plated carbon steel construction.

Ultra-High Pressure up to 2800 bar



2-Way Shut-Off Valve Model Nr. 72-750

For 2800 bar applications requiring a shut-off valve or gauge snubber.

Made of 318 Stainless Steel and utilizing .38 inch cone fittings, it is the perfect selection for use with your ultra-high pressure hand pump.




Test System Gauges

Ideal for monitoring pressure in your hydraulic circuit.

Test System Gauges, such as the **T6010L**, are available

with cone threads or NPTF threads and a variety of pressure ranges.


Page: 132

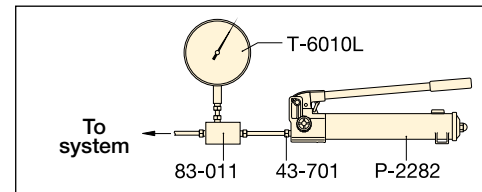

▲ Typical Test System

Cone Seal

Stainless Steel High Pressure fittings seal on a 'cone' surface and do not require pipe sealer. The Gland Nut holds the sleeve and tubing tight against the cone surface to provide a 2800 bar seal.

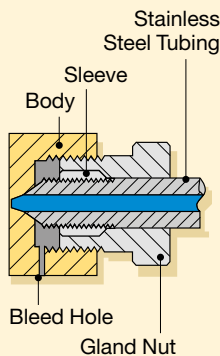

| Pump Type | Usable Oil Capacity (cm ³) | Model Number | Pressure Rating* (bar) | | Oil Displacement per Stroke (cm ³) | | Max. Handle Effort (kg) |
|--------------|----------------------------------------|--------------|------------------------|-----------------------|------------------------------------------------|-----------------------|-------------------------|
| | | | 1 st stage | 2 nd stage | 1 st stage | 2 nd stage | |
| Two-Speed | 983 | P-2282 | 13 | 2800 | 16,22 | 0,61 | 48,1 |
| Single-Speed | 737 | 11-100 | - | 700 | - | 2,49 | 54,4 |
| | 737 | 11-400 | - | 2800 | - | 0,62 | 54,4 |

* Contact Enerpac for applications where operating pressure is less than 10% of operating pressure.

Ultra-High Pressure Hand Pumps

▼ Optional Ultra-High Pressure Fittings and Tubings

| Description | Connection | Model Nr. |
|-----------------------|----------------------------------------------------------------------------------|----------------------------|
| 2800 bar | | |
| Gland Nut Plug | .38" cone | 43-001 |
| Elbow | .38" cone | 43-200 |
| Tee | .38" cone | 43-300 |
| Gauge Tee | .38" cone side/ .25" cone gauge port | 43-301 |
| Gauge Adaptor | .38" cone side/ .25" cone gauge port | 83-011 |
| Coupling | .38" cone | 43-400 |
| Cross | .38" cone | 43-600 |
| Gland Nut with Sleeve | .38" cone | 43-701 |
| Gauge Connector | .25" cone | 43-704 |
| Tubing | 100 mm tube, O.D. .38" * 200 mm tube, O.D. .38" * 300 mm tube, O.D. .38" * | 45-116 45-126 45-136 |
| 700 bar only | | |
| Adaptor | .38" F cone to 1/4" M NPTF | 41-146 |
| | .38" F cone to 3/8" M NPTF | 41-166 |
| Adaptor | .38" F cone to 1/4" F NPTF | 41-246 |
| | .38" F cone to 3/8" F NPTF | 41-266 |
| Adaptor | .38" M cone to 3/8" F NPTF | 41-366 |

Note: .25" cone fittings use 9/16"-18 threads, 3/8" cone fittings use 3/4"-16 threads.
* Actual tubing lengths are 19 mm less than nominal size shown. These dimensions make distance between centers of valves and fittings multiples of 100 mm spaces.

P 11 Series



Reservoir Capacity:
737 - 983 cm³

Flow at Rated Pressure:
0,61 - 2,49 cm³/stroke

Maximum Operating Pressure:
700 - 2800 bar




Ultra-High Pressure pumps DO NOT have an internal safety pressure relief valve.




Stainless Steel Construction

Ultra-high Pressure Fittings feature all stainless steel construction except adaptor 41-366, which features nickel plated carbon steel construction.

11-100
11-400

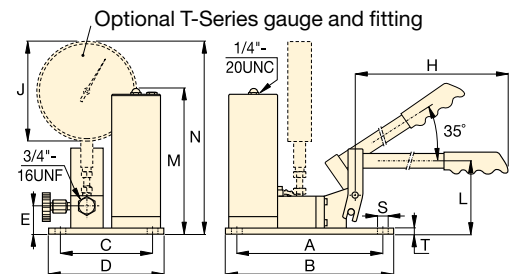

P-2282

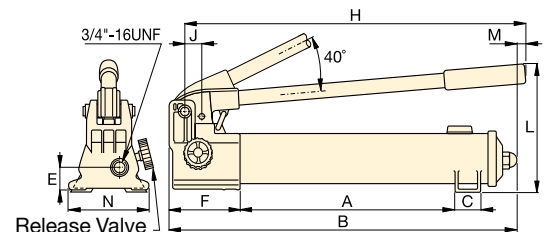

| Piston Stroke | Dimensions (mm) | | | | | | | | | | | | | | Model Number |
|---------------|-----------------|-----|-----|-----|----|-----|-----|-----|-----|-----|-----|---|---|------|--------------|
| | (mm) | A | B | C | D | E | F | H | J | L | M | N | S | T | |
| 25,4 | 344 | 558 | 35 | - | 31 | 133 | 527 | 29 | 228 | 7 | 120 | - | - | 6,4 | P-2282 |
| 19,8 | 240 | 266 | 151 | 177 | 45 | - | 635 | 162 | 114 | 237 | 314 | 7 | 9 | 10,0 | 11-100 |
| 19,8 | 240 | 266 | 151 | 177 | 45 | - | 635 | 162 | 114 | 237 | 314 | 7 | 9 | 10,0 | 11-400 |

▼ Shown: XC-1201ME



- Lightweight design with integrated handle and carrying strap for portability
- Bladder reservoir prevents contamination and allows pump usage in any position
- Powerful 0,37 kW motor and 28 Volt Lithium-Ion battery deliver exceptional speed and run time
- High-strength fiberglass reinforced composite shroud for superior durability in demanding job site environments
- Cordless technology eliminates tripping hazards found in other electric or air powered pumps
- Available in both single- and double-acting valve configurations.



Performance of a Powered Pump

Portability of a Hand Pump



GA45GC Gauge Adaptor Assembly

Protect yourself from system overloading by simply ordering one part number for a pre-assembled gauge, adaptor block and coupler.

Page: **134**



Battery packs contain no cadmium, so they are environmentally friendly. Enerpac encourages recycling.



28-Volt Battery

The XC-28V with Lithium-Ion technology for maximum battery performance.



Battery Charger

1-hour quick charger.

| Model Nr. | Voltage |
|-----------|---------|
| XC-115VC | 115 VAC |
| XC-230VC | 230 VAC |



3/8" Swivel Connector

Customer installed 360 degree swivel coupler for optimal orientation of the hydraulic hose. See details on page 127.

Order Model Number ¹⁾ **XSC1**

¹⁾ Accessories must be ordered separately.

◀ Portable power and simplicity for the toughest jobs.



XC-Series Cordless Hydraulic Pumps

The XC-Series cordless pump is ideal for jobs that require a combination of portability, speed, and safety. These cordless pumps are perfect for remote locations without access to power, but also indoors where trip hazards, ergonomics or size is a concern.

The XC-Series cordless pump is compatible with all Enerpac hydraulic tools and small to medium sized cylinders.

The XC-Series cordless pump is CSA and CE compliant.



The Lithium-Ion battery provides superior run time:

- 270 cuts of 10 mm reinforcing bar using a WHC-750 Cutter
- 112 lifts with a WR-5 Spreader
- 45 splits on M27 - 8.8 nuts using a NC-3241 Nut Cutter
- 30 times lifting with a RC-104 cylinder (10 ton, 100 mm stroke).

Note: Actual number of cycles per charge will vary depending on condition of battery, tool and ambient conditions. Battery life with double-acting tools is approximately 75% of that for comparable, single-acting tools.



- ① Outlet "Advance" Port 3/8"-18 NPTF
- ② Oil Fill (must use funnel)
- ③ User Adjustable Relief Valve Access Port
- ④ Directional Control Valve
- ⑤ Shoulder Strap Connection Points
- ⑥ Safety Lock Feature
- ⑦ On/Off Switch
- ⑧ Inlet "Retract" Port (double-acting models only)

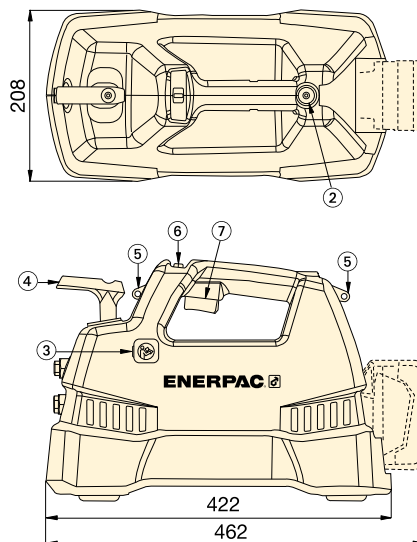

▼ SELECTION CHART

| Pump Type (Used with cylinder) | Useable Oil Capacity (litres) | Model Number | Output Flow Rate (l/min) | | | Valve Function | Charger Voltage (VAC) | Weight (kg) |
|-----------------------------------|----------------------------------|-------------------------|-----------------------------|---------|---------|----------------|--------------------------|----------------|
| | | | No Load | 140 bar | 700 bar | | | |
| Single-Acting | 1,0 | XC-1201MB ¹⁾ | 2,0 | 0,50 | 0,25 | 3-way, 2-pos. | 115 | 10 |
| | 2,0 | XC-1202MB | 2,0 | 0,50 | 0,25 | 3-way, 2-pos. | 115 | 11 |
| | 1,0 | XC-1201ME ¹⁾ | 2,0 | 0,50 | 0,25 | 3-way, 2-pos. | 230 | 10 |
| | 2,0 | XC-1202ME | 2,0 | 0,50 | 0,25 | 3-way, 2-pos. | 230 | 11 |
| | 1,0 | XC-1201M ²⁾ | 2,0 | 0,50 | 0,25 | 3-way, 2-pos. | – | 10 |
| | 2,0 | XC-1202M ²⁾ | 2,0 | 0,50 | 0,25 | 3-way, 2-pos. | – | 11 |
| Double-Acting | 1,0 | XC-1401MB | 2,0 | 0,50 | 0,25 | 4-way, 3-pos. | 115 | 10 |
| | 2,0 | XC-1402MB | 2,0 | 0,50 | 0,25 | 4-way, 3-pos. | 115 | 11 |
| | 1,0 | XC-1401ME | 2,0 | 0,50 | 0,25 | 4-way, 3-pos. | 230 | 10 |
| | 2,0 | XC-1402ME | 2,0 | 0,50 | 0,25 | 4-way, 3-pos. | 230 | 11 |
| | 1,0 | XC-1401M ²⁾ | 2,0 | 0,50 | 0,25 | 4-way, 3-pos. | – | 10 |
| | 2,0 | XC-1402M ²⁾ | 2,0 | 0,50 | 0,25 | 4-way, 3-pos. | – | 11 |

¹⁾ Available as a cylinder pump set, see page 58.

²⁾ Batteries and charger not included.

XC Series



Reservoir Capacity:

1,0 - 2,0 litres


Flow at Rated Pressure:

0,25 l/min

Maximum Operating Pressure:

700 bar

OIL FLOW vs. PRESSURE

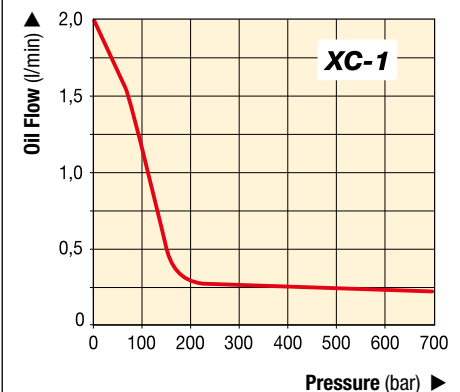

▼ Take the battery pump anywhere without power cords or air hoses.



▼ Shown: PUJ-1200E



Heavy on Performance, Light on Weight

- Lightweight and compact design: 11,8 to 18,6 kg
- Large easy-carry handle for maximum portability
- Two-speed operation reduces cycle times for improved productivity
- 230 VAC 50/60-cycle universal motor will operate under poor voltage supply
- 24 VAC remote motor control, 3 m length for operator safety
- Starts under full load
- High strength molded shroud, with integral handle, protects motor from contamination and damage
- Designed for intermittent duty cycle.

▼ An Economy Pump PUJ-1200E is used with a low-height cylinder RCS-302 to reposition a Scissor lift to simplify maintenance.



Gauges

Minimize the risk of overloading and ensure long, dependable service from your equipment. For use with the Economy pump the **G-2535L** gauge and **GA-3** gauge adaptor are suggested.

For a full range of gauges, please refer to the System Components section.

Page: 130



Hoses

Enerpac offers a complete line of high quality hydraulic hoses. To ensure the integrity of your system, specify only genuine Enerpac hydraulic hoses.

Page: 122



Speed Chart

To determine how a specific pump will operate your cylinder, see the Pump-Cylinder Speed Chart in the 'Yellow Pages'.

Page: 273

| Pump Type (Used with cylinder) | Usable Oil Capacity (litres) | Model Number * | Pressure Rating (bar) | |
|---------------------------------------|-------------------------------------|----------------|-----------------------|-----------------------|
| | | | 1 st stage | 2 nd stage |
| Single-Acting | 1,9 | PUD-1100E | 13 | 700 |
| | 3,8 | PUD-1101E | 13 | 700 |
| | 1,9 | PUJ-1200E | 13 | 700 |
| | 3,8 | PUJ-1201E | 13 | 700 |
| | 1,9 | PUD-1300E | 13 | 700 |
| | 3,8 | PUD-1301E | 13 | 700 |
| Double-Acting | 1,9 | PUJ-1400E | 13 | 700 |
| | 3,8 | PUJ-1401E | 13 | 700 |

* For 115 volt applications replace 'E' suffix with 'B'.

** Electric dump valve for auto-retract of cylinders.

Economy Electric Pumps



About the Economy Pump

The Economy pump is best suited to power small to medium size cylinders or hydraulic tools. Its lightweight and compact design make it ideal for applications which require easy transport of the pump. The universal motor works well on long extension cords or generator-driven electrical power supplies.

For further application assistance refer to the 'Yellow Pages'.

PUD-1100 Series

- Provides advance-retract of single-acting cylinders
- Ideal for punching applications
- For applications not requiring load holding
- 3 m cord with pendant controls motor and valve operation.

PUD-1300 Series

- Provides advance-hold-retract of single-acting cylinders
- Ideal for applications requiring load-holding
- For applications requiring solenoid valve operations
- 3 m cord with pendant controls motor and valve operation.

PUJ Series

- Manual valves provide advance-hold-retract tool operation
- Available with 3- and 4-way valves for single or double-acting cylinders
- 3 m cord with pendant controls the motor operation.



Page: 263

PU Series



Reservoir Capacity:

1,9 - 3,8 litres

Flow at Rated Pressure:


0,32 l/min

Motor Size:

0,37 kW


Maximum Operating Pressure:

700 bar

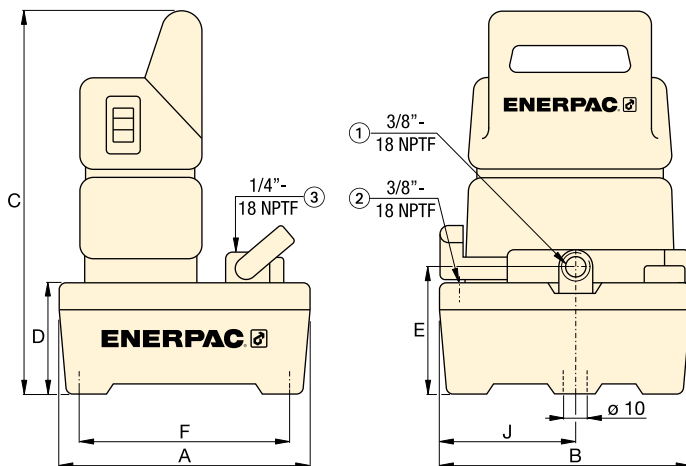

- ① Oil Outlet Port
- ② Tank Port
- ③ Gauge Port (PUJ-1200 and PUJ-1201 models only)

OIL FLOW VERSUS PRESSURE

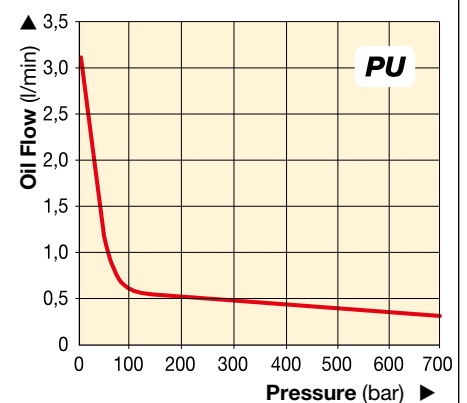

| Output Flow Rate (l/min) | Valve Type | Valve Function | Current Draw (Amps) | Motor Voltage (VAC) | Sound Level (dBA) | Dimensions (mm) | | | | | | | Weight (kg) | Model Number * |
|--------------------------|--------------|-----------------------|---------------------|---------------------|-------------------|-----------------------|-----------------------|-----|-----|-----|-----|-----|-------------|----------------|
| | | | | | | 1 st stage | 2 nd stage | A | B | C | D | E | | |
| 3,31 | Dump** | Advance/Retract | 3,2 | 230 | 85 | 244 | 244 | 362 | 101 | 119 | 203 | 133 | 11,8 | PUD-1100E |
| 0,32 | | | 3,2 | 230 | 85 | 368 | 309 | 373 | 105 | 130 | 323 | 142 | 17,2 | PUD-1101E |
| 3,31 | 3/2 manual | Advance/ Hold/Retract | 3,2 | 230 | 85 | 244 | 244 | 362 | 101 | 119 | 203 | 133 | 10,0 | PUJ-1200E |
| 0,32 | | | 3,2 | 230 | 85 | 368 | 309 | 373 | 105 | 130 | 323 | 142 | 15,4 | PUJ-1201E |
| 3,31 | 3/2 solenoid | Dump & Hold | 3,2 | 230 | 85 | 244 | 244 | 362 | 101 | 119 | 203 | 133 | 12,0 | PUD-1300E |
| 0,32 | | | 3,2 | 230 | 85 | 368 | 309 | 373 | 105 | 130 | 323 | 142 | 17,5 | PUD-1301E |
| 3,31 | 4/3 manual | Advance/ Hold/Retract | 3,2 | 230 | 85 | 244 | 244 | 362 | 101 | 119 | 203 | 133 | 13,2 | PUJ-1400E |
| 0,32 | | | 3,2 | 230 | 85 | 368 | 309 | 373 | 105 | 130 | 323 | 142 | 18,6 | PUJ-1401E |

▼ Shown: PEJ-1401E



Best Performance for Mid-Range Cylinders and Tools

- Two-speed operation reduces cycle times for improved productivity
- Powerful 0,37 kW induction motor is submerged in the oil reservoir to run cooler, protect the motor, simplify the pump interface, save space and reduce noise
- Large 5,5 litres reservoir allows operation of a wide range of cylinders
- 24 VDC remote pendant control on certain models for improved safety
- Externally adjustable relief valve allows control of operating pressure without opening the pump
- 40-micron internal return line filter keeps oil clean, promoting longer pump life
- Full length side tube for easy monitoring of oil level.

▼ SELECTION CHART

For more technical information see next page.

5 BASIC PUMP TYPES

Select the model that suits your application. For special requirements see page 89 or contact your Enerpac office.

PEM Series: with Manual Valve

- Ideal choice for most applications
- Manual valve control, for both single-acting and double-acting applications
- Manual motor control.

PER Series: with Solenoid Valve

- Ideal for production and lifting
- All valves are 3 position for Advance-Hold-Retract
- Control pendant with 3 m cord for remote valve operation.

PEJ Series: with Remote Jog

- For light production and lifting applications
- Manual valve control for single-acting or double-acting cylinders
- Control pendant with 3 m cord for remote motor operation.

PES Series: with Pressure Switch

- Designed for continuous pressure applications, such as clamping, workholding and testing
- All versions include manual valves for directional control.



◀ The Remote Jog model (PEJ-Series) of the Submerged Pump simplifies maintenance on this machine.

Submerged Electric Pumps



PE-Series Submerged Pump Application

The Submerged pump is best suited to power small to medium size cylinders or hydraulic tools, or whenever quiet, intermittent duty cycle is needed.

With its low sound level and the addition of the optional oil cooler, the Submerged pump is suited to light production work as well.

Its lightweight and compact design also make it ideal for applications which require some transport of the pump.

For further application assistance see the 'Yellow Pages' or contact your local Enerpac office.

Page: 263

PE Series



Reservoir Capacity:

5,5 litres

Flow at Rated Pressure:

0,27 l/min

Motor Size:

0,37 kW

Maximum Operating Pressure:

700 bar

| Pump Type | Used with Cylinder | Valve Function | Valve Type | Usable Oil Capacity (litres) | Model Number 230 VAC, 1 ph * | Weight (kg) |
|-----------|--------------------|----------------------|-----------------------------|------------------------------|------------------------------|-------------|
| | Single-Acting | Advance/Retract | Manual, 3-way, 2-position | 5,5 | PEM-1201E | 24,0 |
| | Single-Acting | Advance/Hold/Retract | Manual, 3-way, 3-position | 5,5 | PEM-1301E | 24,0 |
| | Double-Acting | Advance/Hold/Retract | Manual, 4-way, 3-position | 5,5 | PEM-1401E | 24,0 |
| | Single-Acting | Advance/Hold/Retract | Solenoid, 3-way, 3-position | 5,5 | PER-1301E | 29,5 |
| | Double-Acting | Advance/Hold/Retract | Solenoid, 4-way, 3-position | 5,5 | PER-1401E | 29,5 |
| | Single-Acting | Advance/Retract | Manual, 3-way, 2-position | 5,5 | PEJ-1201E | 24,9 |
| | Single-Acting | Advance/Hold/Retract | Manual, 3-way, 3-position | 5,5 | PEJ-1301E | 24,9 |
| | Double-Acting | Advance/Hold/Retract | Manual, 4-way, 3-position | 5,5 | PEJ-1401E | 24,9 |
| | Single-Acting | Advance/Retract | Manual, 3-way, 2-position | 5,5 | PES-1201E | 28,1 |
| | Double-Acting | Advance/Hold/Retract | Manual, 4-way, 3-position | 5,5 | PES-1401E | 28,1 |


* For 115V replace suffix "E" with "B" in the model number.

PE-Series, Submerged Electric Pumps


◀ For full features see previous page.

| SUBMERGED PUMP PERFORMANCE | | | | | | | |
|----------------------------|--------------------------|-----------------------|-----------------------------------------|-----------------------|----------------------------------------|----------------------|----------------------------------------------|
| Motor Size (kW) | Pressure Rating (bar) | | Output Flow Rate at 50 Hz (l/min) | | Motor Electrical Specifications * | Sound Level (dBA) | Relief Valve Adjustment Range (bar) |
| | 1 st stage | 2 nd stage | 1 st stage | 2 nd stage | | | |
| 0,37 | 70 | 700 | 2,0 | 0,27 | 13 @ 115-1-50/60 6,75 @ 230-1-50/60 | 62-70 | 70-700 |

* At full load. See ordering matrix footnote for frequency notations.

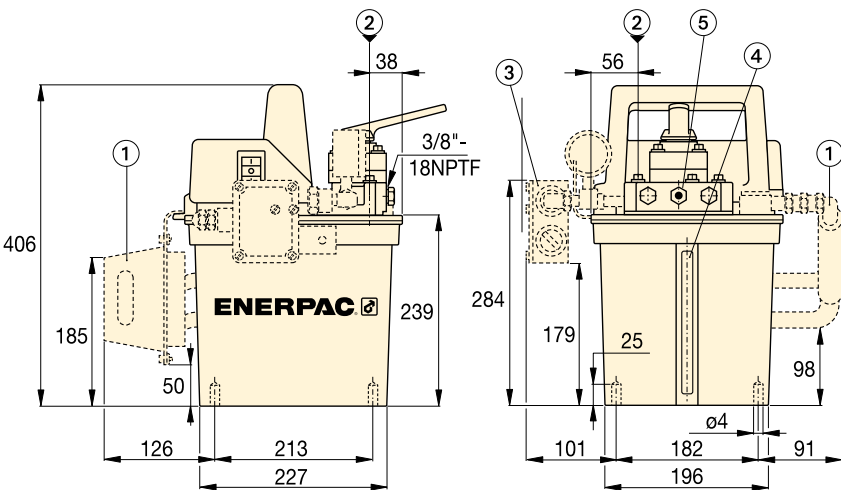

- ① Heat Exchanger (optional for all models)
- ② Fill Port
- ③ Pressure Switch (PES-series, optional for other models)
- ④ Oil Level Indicator
- ⑤ Adjustable relief valve

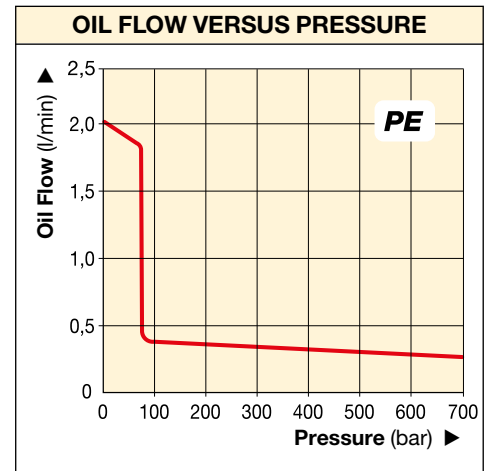

Speed Chart

To determine how a specific pump will operate your cylinder, see the Pump-Cylinder Speed Chart in the 'Yellow Pages'.

Page: 273



◀ This Submerged pump quickly and quietly powers a hydraulic nut cutter in this maintenance application.

Submerged Electric Pumps

CUSTOM BUILD YOUR SUBMERGED PUMP

If the Submerged Pump that would best fit your application cannot be found in the chart on page 87, here you can easily build your custom submerged pump.

▼ This is how a Submerged Pump Model Number is built up:

| | | | | | | | |
|--------------|------------|-----------|----------|-------------|------------|----------------|---------------|
| P | E | M | - | 1 | 3 | 01 | E |
| 1 | 2 | 3 | | 4 | 5 | 6 | 7 |
| Product Type | Motor Type | Pump Type | | Pump Series | Valve Type | Reservoir Size | Motor Voltage |

1 Product Type

P = Pump

2 Motor Type

E = Electric Motor

3 Pump Type

J = Jog

M = Manual

R = Remote (Solenoid) ^{1) 2)}

S = Pressure Switch

4 Pump Series

1 = 0,37 kW, 700 bar

5 Valve Type

0 = No valve (PER only)

2 = 3-way, 2-position, normally open

3 = 3-way, 3-position, tandem center

4 = 4-way, 3-position, tandem center

5 = Modular solenoid valve (PER only)

6 Reservoir Capacity

01 = 5,5 litres

7 Motor Voltage and Heat Exchanger

B = 115 V, 1 Ph, 50/60 Hz ¹⁾

D = 115 V, 1 Ph, 50/60 Hz ¹⁾ with Heat Exchanger

E = 230 V, 1 Ph, 50/60 Hz ²⁾

F = 230 V, 1 Ph, 50/60 Hz ²⁾ with Heat Exchanger

I = 230 V, 1 Ph, 60 Hz

¹⁾ Solenoid valves operate only at 60 Hz. Can run on 50 Hz with manual valves.

²⁾ Solenoid valves operate only at 50 Hz. Can run on 60 Hz with manual valves.

The following submerged pump models include a modular solenoid valve and pilot operated check valve:

PER-1301B

PER-1301D

PER-1301E

PER-1401B

PER-1401D

PER-1401E

Ordering Example

Model Number: PER-1301E

The PER-1301E is a 0,37 kW, 700 bar, submerged electric pump, with 5,5 litres usable oil capacity, a 3-way, 3-position, remote solenoid valve and a 230 V, 1 Phase, 50/60 Hz motor.

PE Series



Reservoir Capacity:

5,5 litres

Flow at Rated Pressure:

0,27 l/min

Motor Size:

0,37 kW

Maximum Operating Pressure:

700 bar



Hoses

Enerpac offers a complete line of high quality hydraulic hoses. To ensure the integrity of your system, specify only genuine Enerpac hydraulic hoses.

Page: **122**



Gauges

Minimize the risk of overloading and ensure long, dependable service from your equipment. Refer to the System Components section for a full range of gauges.

Page: **130**

Z-Class Enerpac Power Pumps

Introducing the **Z-Class** power pumps from Enerpac – pumps that run cooler, use less electricity and are easy to service.

Enerpac has used the latest metallurgical, bearing and seal technologies to produce a pump whose features and benefits far surpass the electric pumps that are available today. By reducing the number of moving parts, improving flow dynamics and decreasing friction, Z-Class pumps will stay on the job longer, require less energy to operate and when needed, have lower service costs.



Z-Class power pumps from Enerpac – simply the best pump you will ever use.

Z Tough.
Dependable.
Innovative.
CLASS



Z-Class, An Innovation in Pump Design

Z-Class Pumping Element – The Heart of Your Hydraulic System

Highly efficient design provides increased flow rates, reduced heat generation and a decrease in power consumption. This means improved tool speed and increased service life – which results in higher productivity and lower operating costs.

Heavy-duty bearings extend pump life by reducing friction, reducing surface-loading and lowering bearing stresses.

Pump cavity oil bath extends pump life by reducing heat, improving lubrication and reducing wear.

Self-priming, high-flow 1st stage pump increases pump performance by super-charging the 2nd stage piston pump – improving oil flow in both hot and cold weather operation.

Balanced rotating components reduce vibration creating a smoother running pump – reducing wear, friction and sound levels.

Replaceable piston check-valves increase service life of major pump components.

Ergonomic pendant features sealed switches and operates at 24 V for improved operator safety.

Z-Class factory options & accessories

Extensive list of accessories including heat exchanger, roll cage, skid bar, pressure transducer, return line filter and level and temperature switches, allow complete pump control over a wide range of industrial applications.

Z-Class power pumps for your application

Available in one flow range for universal motor and eight flow ranges for induction motor. Choose from single or two-stage models to provide the optimum cylinder and tool performance for almost any industrial application.

Back-lit LCD on select Z-Class pumps

- pump usage information, hour and cycle counts
- low-voltage warning and recording
- offers self-test and diagnostic capabilities
- information displayed in 6 languages
- pressure read-out (when used with the optional pressure transducer)
- adjustable trigger pressure setting (when used with the optional pressure transducer).



Back-lit LCD available on ZU and ZE-Series Electric Pumps. ▶



ZU-Series Pump Applications

- **Mobile:** when frequent pump transport is required and/or on remote locations
- **Universal motor:** 1-phase, runs well under poor voltage supply, using generator power supply or using long extension cord
- **Duty-cycle:** for intermittent applications
- **Cylinders and tools:** for medium to large size single and double-acting applications and high speed
- **Pump speed:** two stage pump unit.



ZE-Series Pump Applications

- **Stationary:** when pump remains in one location
- **Induction motor:** 1 and 3-phase for high cycle usage
- **Duty-cycle:** for heavy-duty, extended cycle application
- **Cylinders and tools:** for medium to large size single and double-acting applications and high speed
- **Pump speed:** single or two stage pump unit.

| Oil Flow Rate at 700 bar (l/min) | Z-Class Pump Series * | Electric Motor Power (kW) | Air Motor-Consumption (l/min) | Gasoline Engine Power (kW) | Page: |
|-------------------------------------|-----------------------|------------------------------|----------------------------------|-------------------------------|----------|
| 0,55 | ZE3 | 0,75 | – | – | 98 |
| 0,82 | ZE4(T) | 1,12 | – | – | 98, 220 |
| 1,00 | ZU4(T) | 1,25 | – | – | 92, 216 |
| 1,30 | ZA4(T) | – | 2840 | – | 110, 224 |
| 1,60 | ZG5 | – | – | 4,8 | 112 |
| 1,64 | ZE5(T) | 2,24 | – | – | 98, 220 |
| 2,73 | ZE6 | 5,60 | – | – | 98 |
| 3,30 | ZG6 | – | – | 9,7 | 112 |

* ZA4T, ZU4T, ZE4T and ZE5T-Series are Torque Wrench Pumps.

ZU4-Series, Portable Electric Pumps

▼ Shown from left to right: ZU4304ME, ZU4420SE-H, ZU4304PE-K



- High-efficiency two-speed pump design – higher oil flow and bypass pressure
- Powerful 1,25 kW universal electric motor provides high power-to-weight ratio and excellent low-voltage operating characteristics
- High-strength, moulded composite shroud protects motor and electronics, while providing an ergonomic, non-conductive handle for easy transport.

Pro-Series models only

- * Back-lit LCD readout provides pressure display and a number of diagnostics and readout capabilities never offered on a portable pump before:
 - pump usage information, hour and cycle counts
 - self-test, diagnostic and read-out capabilities
 - pressure readout and auto-mode pressure settings.



◀ Designed to be tough, the ZU4-Series with steel reservoirs will take the abuse of today's construction sites.

Z Tough.
Dependable.
Innovative.
CLASS



Assisted Return Pumps with Venturi Valve Technology

To improve productivity and plunger retraction, Enerpac offers valve configurations designed to accelerate your cylinder retraction speeds, ZU4-Series pumps feature **Venturi Valve Technology** to facilitate the faster return of single-acting gravity return cylinders. See valve type in ordering matrix and details in section Directional Control Valves.

▼ COMMON PUMP MODELS

For technical information and other options see next page.

BASIC PUMP TYPES

Select the model that suits your application. For special requirements contact your Enerpac office.

Manual Valve

- Ideal choice for most applications.
- For single-acting or double-acting applications.
- Venturi Valve Technology (VM33VAC) for faster retract of single-acting cylinders.
- Motor control on shroud.

Manual Valve with Pendant *

- For light production and lifting applications.
- For single- or double-acting cylinders.
- Venturi Valve Technology (VM33VAC) for faster retract of single-acting cylinders.
- Manual valve with power seat (VM43LPS), ideal for post-tensioning applications.

Dump Valve *

- Ideal for punching, crimping and cutting.
- For use when load-holding is not required.

Solenoid Valve *

- Ideal for lifting applications and where remote control is required.
- Venturi Valve Technology (VE33VAC) for faster retract of single-acting cylinders.
- With VE32 valve, motor only runs during the advance function, while holding and retracting, the motor is off.
- Motor runs continuously on pumps with VE33 and VE43 valves.

* Pendant with 3 m. cord controls valve and motor.

ZU4-Series, Electric Pumps



Z-Class – A Pump For Every Application

Patented Z-Class pump technology provides high by-pass pressures for increased productivity – important in applications using long hose runs and high pressure-drop circuits, like heavy lifting or certain double-acting tools.

Enerpac ZU4-Series Pumps are built to power small to large-sized cylinders or hydraulic tools, or wherever high-speed, intermittent duty, remote hydraulic power is needed.

Classic Electric Pumps

- The Classic has traditional electro-mechanical components (transformers, relays and switches) in place of solid-state electronics.

The Classic delivers durable, safe and efficient hydraulic power for demanding markets like construction, post-tensioning and foundation repair.

Standard Electric Pumps

- For applications that do not require digital display features of the Premium Pump. Available in all manual or jog versions.

Pro Electric Pumps

- Digital (LCD) display features a built-in hour meter and shows self-diagnostic, cycle-count and low voltage warning information.
- Pressure can also be displayed when the pump is equipped with an optional pressure transducer.



ZU4 Series



Reservoir Capacity:

4 - 40 litres

Flow at Rated Pressure:

1,0 l/min

Motor Size:

1,25 kW

Maximum Operating Pressure:

700 bar

| Pump type | Used with Cylinder | | Valve Function | | | Valve Type ¹⁾ | Pump Control | Useable Oil Capacity (litres) | Model Number 230 V - 1 phase - 50 Hz ²⁾ | | | Pro Electric Weight ³⁾ (kg) |
|-----------|--------------------|---|----------------|---|---|--------------------------|---------------|-------------------------------|----------------------------------------------------|-------------------------|--------------------------|----------------------------------------|
| | | | | | | | | | Classic Electric | Standard (STD) Electric | Pro Electric (incl. LCD) | |
| | ● | | ● | | ● | VM32 | Manual | 4,0 | ZU4204RE | ZU4204ME | ZU4204LE | 27 |
| | ● | | ● | | ● | VM32 | Manual | 8,0 | ZU4208RE | ZU4208ME | ZU4208LE | 32 |
| | ● | | ● | ● | ● | VM33VAC | Manual | 8,0 | ZU41008RE | ZU41008ME | ZU41008LE | 33 |
| | ● | | ● | ● | ● | VM33 | Manual | 20,0 | ZU4320RE | ZU4320ME | ZU4320LE | 50 |
| | | ● | ● | ● | ● | VM43 | Manual | 8,0 | ZU4408RE | ZU4408ME | ZU4408LE | 32 |
| | | ● | ● | ● | ● | VM43 | Manual | 20,0 | ZU4420RE | ZU4420ME | ZU4420LE | 50 |
| | ● | | ● | | ● | VM32 ⁴⁾ | Remote (Man.) | 4,0 | ZU4704PE ⁴⁾ | ZU4204JE | ZU4204KE | 27 |
| | ● | | ● | | ● | VM33VAC | Remote (Man.) | 8,0 | ZU41008PE | ZU41008JE | ZU41008KE | 33 |
| | ● | | ● | | ● | VM32 ⁴⁾ | Remote (Man.) | 20,0 | ZU4720PE ⁴⁾ | ZU4220JE | ZU4220KE | 50 |
| | ● | | ● | ● | ● | VM33 | Remote (Man.) | 8,0 | ZU4308PE | ZU4308JE | ZU4308KE | 32 |
| | | ● | ● | ● | ● | VM43 | Remote (Man.) | 8,0 | ZU4408PE | ZU4408JE | ZU4408KE | 32 |
| | | ● | ● | ● | ● | VM43 | Remote (Man.) | 20,0 | ZU4420PE | ZU4420JE | ZU4420KE | 50 |
| | ● | | ● | | ● | VE32D | Remote | 4,0 | N/A | N/A | ZU4104DE | 29 |
| | ● | | ● | | ● | VE32D | Remote | 8,0 | N/A | N/A | ZU4108DE | 33 |
| | ● | | ● | | ● | VE32D | Remote | 20,0 | N/A | N/A | ZU4120DE | 51 |
| | | | | | | – | – | – | – | – | – | – |
| | | | | | | – | – | – | – | – | – | – |
| | | | | | | – | – | – | – | – | – | – |
| | ● | | ● | ● | ● | VE32 | Remote | 4,0 | N/A | N/A | ZU4204SE | 29 |
| | ● | | ● | ● | ● | VE32 | Remote | 8,0 | N/A | N/A | ZU4208SE | 33 |
| | ● | | ● | ● | ● | VE33 | Remote | 8,0 | N/A | N/A | ZU4308SE | 39 |
| | ● | | ● | ● | ● | VE33VAC | Remote | 8,0 | N/A | N/A | ZU41108SE | 40 |
| | | ● | ● | ● | ● | VE43 | Remote | 8,0 | N/A | N/A | ZU4408SE | 39 |
| | | ● | ● | ● | ● | VE43 | Remote | 20,0 | N/A | N/A | ZU4420SE | 56 |
| | | | | | | – | – | – | – | – | – | – |
| | | | | | | – | – | – | – | – | – | – |

¹⁾ See valves section for technical information on valve types. ²⁾ See custom order matrix on page 89 for other voltage options.

³⁾ Subtract 1,4 kg for Standard (STD) Electric models. ⁴⁾ ZU47... pump models have VM22 3-way, 2 position manual valve for foundation repair applications.



Pressure Transducer *

- More durable than analog gauges (against mechanical and hydraulic shock)
- More accurate than analog gauges (0,5% full scale of pump)
- Calibration can be fine tuned for certification
- "Set pressure" feature turns off motor at user defined pressure (or shifts valve to neutral on models with VE33/VE43 valves)
- Display pressure in bar, psi or MPa.

* Requires LCD Electric


| Accessory Kit Model Number | Adjustable Pressure Range (bar) | Switch-point repeatability | Dead-band (bar) |
|----------------------------|---------------------------------|----------------------------|-----------------|
| ZPT-U4 * | 3,5 - 700 | ± 0,5% | 3,5 |

* Add suffix **T** for factory installation.



Level/Temperature Switch

- Ensures feedback on pump oil level and temperature
- Drop-in design allows for easy installation to pump reservoir
- Plugs directly into pump electrical enclosure
- Built-in thermal sensing shuts off pump when unsafe operating temperature is reached
- Oil level switch shuts down pump before oil reaches an unsafe operating level.

| Model Number | Operating Temperature (°C) | Maximum Pressure (bar) |  (kg) |
|--------------|----------------------------|------------------------|------------------------------------------------------------------------------------------|
| ZLS-U4 * | 5-110 | 10 | 0,1 |

* Add suffix **L** for factory installation.



Hoses

Enerpac offers a complete line of high-quality hydraulic hoses. To ensure the integrity of your system, specify only Enerpac hydraulic hoses.

Page: 122



Gauges

Minimize the risk of overloading and ensure long, dependable service from your equipment. Refer to the System Components section for a full range of gauges.

Page: 130



Foot Switch

- Hands-free remote control on solenoid dump and 3-position valves
- With 3 metres cord.

| Accessory Kit Modelnr. | Can be used on ZU4-Series Pumps with |
|------------------------|--------------------------------------|
| ZCF-2 * | Solenoid VE-Series valves |

* Add suffix **U** for factory installation.



Roll Cage

- Protects pump
- Provides greater pump stability.

| Accessory Kit Modelnr. | Fits on reservoir |
|------------------------|------------------------------|
| ZRC-04 * | 4 and 8 litres ¹⁾ |
| ZRC-04H * | 4 and 8 litres ²⁾ |
| ZRB-10 * | 10 litres |
| ZRB-20 * | 20 litres |
| ZRB-40 * | 40 litres |

* Add suffix **R** for factory installation.


¹⁾ Without heat exchanger

²⁾ With heat exchanger.



Skid Bar

- Provides easy two-hand lift
- Provides greater pump stability on soft or uneven surfaces.

| Accessory Kit Modelnr. | Fits on reservoir |  (kg) |
|------------------------|----------------------------------|--------------------------------------------------------------------------------------------|
| SBZ-4 * | 4 and 8 l without heat exchanger | 2,2 |
| SBZ-4L * | 4 and 8 l with heat exchanger | 3,2 |

* Add suffix **K** for factory installation.

ZU4-Series, Options & Accessories



ZU4-Series Options

Accessory Kits can be installed by the customer.

See chart below for all possible options on ZU4-Series pumps:

- Classic Electric,
 - Standard (STD) Electric (no LCD)
 - Pro Electric (with LCD).
- Refer to page 97 for ordering matrix.

| ZU4-Series Options | Factory Installed | | | Accessory Kits | | |
|--------------------------|-------------------|-------------------|--------------|------------------|-------------------|--------------|
| | Classic Electric | Standard Electric | Pro Electric | Classic Electric | Standard Electric | Pro Electric |
| Return Line Filter | F | F | F | ZPF | ZPF | ZPF |
| Skid Bar ¹⁾ | K | K | K | SBZ | SBZ | SBZ |
| Roll Cage | R | R | R | ZRC | ZRC | ZRC |
| Heat Exchanger | H | H | H | ZHE | ZHE | ZHE |
| 1000 bar Pressure Gauge | G | G | G | G | G | G |
| Pressure Transducer | - | - | T | - | - | ZPT-U4 |
| Level/Temperature Switch | - | - | L | - | - | ZLS-U4 |
| Foot Switch | - | - | U | - | - | ZCF-2 |
| | | | | | | |
| | | | | | | |

¹⁾ Skid Bar not in combination with Roll Cage.

ZU4 Series



Reservoir Capacity:

4 - 40 litres

Flow at Rated Pressure:

1,0 l/min

Motor Size:

1,25 kW

Maximum Operating Pressure:

700 bar



Return Line Filter

- 25 micron filter removes contaminants from return oil flow
- By-pass valve prevents damage if filter is dirty
- With maintenance indicator.

| Accessory Kit Modelnr. | Maximum Pressure (bar) | Maximum Oil Flow (l/min) | By-pass Setting (bar) |
|------------------------|------------------------|--------------------------|-----------------------|
| ZPF * | 13,8 | 45,4 | 1,7 |

* Add suffix **F** for factory installation.



Heat Exchanger

- Removes heat from by-pass oil to provide cooler operation
- Stabilizes oil viscosity, increasing oil life and reduces wear of pump and other hydraulic components.

| Accessory Kit Nr. | Can be used on | (kg) |
|-------------------|----------------|------|
| ZHE-U115 * | 115 V pumps | 4,1 |
| ZHE-U230 * | 230 V pumps | 4,1 |

* Add suffix **H** for factory installation.



Heat Exchanger

Can be factory installed on ZU4-Series Classic, Standard Electric and Pro Electric models.

- Extends system life.
- Stabilizes oil temperature at a maximum of 54 °C at 21 °C ambient temperature.


Do not exceed maximum oil flow and pressure ratings. Heat exchanger is not suitable for water-glycol or high water based fluids.

| Thermal Transfer * | | Maximum Pressure | Maximum Oil Flow | Voltage |
|--------------------|--------|------------------|------------------|---------|
| Btu/h | kJoule | (bar) | (l/min) | (VDC) |
| 900 | 950 | 20,7 | 26,5 | 12 |

* At 1,9 l/min at 21 °C ambient temperature.


ZU4, Specifications and Dimensions

OIL FLOW VERSUS PRESSURE

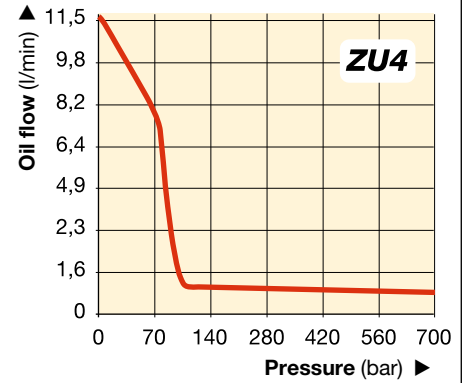


ZU4-SERIES PERFORMANCE CHART

| Motor Size (kW) | Output Flow Rate at 50 Hz (l/min) | | | | Motor Electrical Specifications (Volts-Ph-Hz) | Sound Level (dBA) | Relief Valve Adjustment Range (bar) |
|--------------------|-----------------------------------|--------|---------|---------|--------------------------------------------------|----------------------|----------------------------------------|
| | 7 bar | 50 bar | 350 bar | 700 bar | | | |
| 1,25 | 11,5 | 8,8 | 1,2 | 1,0 | 115-1-50/60 230-1-50/60 | 85-90 | 140-700 |

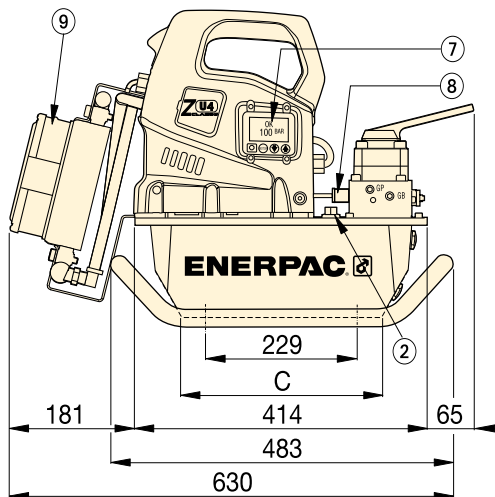

ZU4-Series with 4 and 8 litres reservoirs

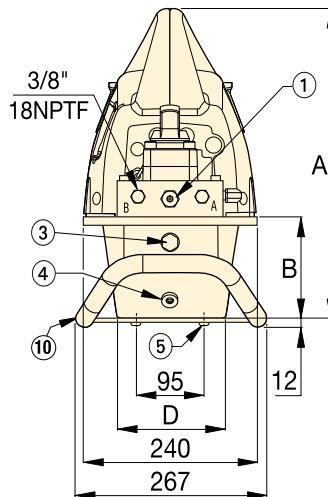


3/8"-18 NPTF Advance and Retract Ports


- ① User adjustable relief valve
- ② Oil fill port SAE #10 7/8"-14 UNF-2B
- ③ Oil level sight gauge
- ④ Oil drain 1/2" NPTF
- ⑤ M8, 6 mm deep
- ⑥ Handles on all 10, 20 and 40 litres reservoirs.

Options (see chart on page 95):

- ⑦ Back-lit LCD Electric
- ⑧ Pressure transducer
- ⑨ Heat Exchanger
- ⑩ Skid Bar
Fits 4 and 8 litres reservoirs
- ⑪ Handle guard installed on all 10, 20 and 40 litres reservoirs
- ⑫ Reservoir handles (not shown) included on all 10, 20 and 40 litres reservoirs.

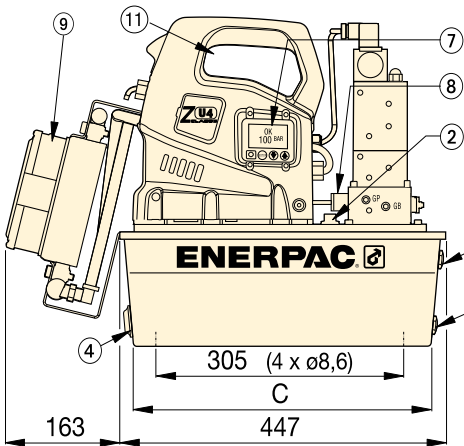

ZU4-Series with 10, 20 and 40 litres reservoirs
(left view shown without side handle)

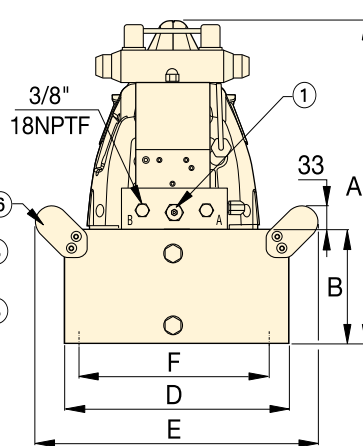

Pump Dimensions (mm)

| Usable Reservoir Capacity (litres) | A | B | C | D | E | F |
|------------------------------------|-----|-----|-----|-----|-----|-----|
| 4,0 | 424 | 142 | 279 | 152 | - | - |
| 8,0 | 424 | 142 | 279 | 206 | - | - |
| 10,0 | 439 | 157 | 413 | 305 | 384 | 279 |
| 20,0 | 465 | 180 | 413 | 422 | 500 | 396 |
| 40,0 | 551 | 269 | 399 | 503 | 576 | 480 |

ZU4-Series, Pump Ordering Matrix

CUSTOM BUILD YOUR ZU4-SERIES PUMP

If the ZU4-Series pump that would best fit your application cannot be found in the chart on page 93, you can easily build your custom ZU4-Series pump here.

▼ This is how a ZU4-Series pump model number is built up:

| | | | | | | | | | | |
|--------------|------------|------------|------------|----------------|-----------------|----------|----------|-------------------------|----------|----------|
| Z | U | 4 | 1 | 04 | D | E | - | H | K | T |
| 1 | 2 | 3 | 4 | 5 | 6 | 7 | | 8 | | |
| Product Type | Motor Type | Flow Group | Valve Type | Reservoir Size | Valve Operation | Voltage | | Options and Accessories | | |

1 Product Type

Z = Pump Series

2 Motor Type

U = Universal electric motor

3 Flow Group

4 = 1,0 l/min @ 700 bar

4 Valve Type (see page 116-117 for more details)

- 1** = Dump (**VE32D**)
- 2** = 3 way/2 position manual or electric (**VM32** or **VE32**)
- 3** = 3 way/3 position manual or electric (**VM33** or **VE33**)
- 4** = 4 way/3 position manual or electric (**VM43** or **VE43**)
- 6** = 3 way/3 position locking manual w/po check (**VM33L**)
- 7** = 3 way/2 position manual (**VM22**)
- 8** = 4 way/3 position locking manual w/po check (**VM43L**)
- 9** = 4 way/3 position manual w/power seating (**VM43LPS**)
- 10** = 3 way/3 position manual Venturi valve (**VM33VAC**)
- 11** = 4 way/3 position electric Venturi valve (**VE33VAC**)
- 12** = 3 way/3 position manual locking Venturi valve (**VM33LVAC**)

5 Reservoir Size (useable capacity)

- 04** = 4 litres
- 08** = 8 litres
- 10** = 10 litres (reservoir includes side handles)
- 20** = 20 litres (reservoir includes side handles)
- 40** = 40 litres (reservoir includes side handles)

6 Valve Operation

- D** = Dump (solenoid valve w/pendant and LCD Electric)
- J** = Jog (manual valve w/pendant and Standard Electric (i.e. w/o LCD))
- K** = Jog (manual valve w/pendant and LCD Electric)
- L** = Manual valve w/LCD Electric (w/o pendant)
- P** = Manual valve w/pendant and classic electric (i.e. w/o LCD)
- R** = Manual valve w/Classic electric (i.e. w/o LCD) [w/o pendant]
- M** = Manual valve w/Standard Electric (i.e. w/o LCD) [w/o pendant]
- S** = Solenoid valve w/pendant and LCD Electric

7 Voltage

- B** = 115V, 1 ph, 50/60Hz
- E** = 208-240V, 1 ph, 50/60 Hz (with European plug and CE EMC compliant)
- I** = 208-240V, 1 ph, 50/60 Hz (with NEMA 6-15 plug)

8 Options and Accessories (see pages 95-96 for possibilities)

- F** = Filter
- G** = 0-1000 bar pressure gauge (ø 63,5 mm)¹⁾
- H** = Heat exchanger
- K** = Skid Bar (4 and 8 litres reservoirs only)
- L** = Level/temperature switch^{2),3)}
- N** = No reservoir handles (includes lifting eyes)
- R** = Roll Cage
- T** = Pressure transducer²⁾
- U** = Foot switch

¹⁾ Pressure gauge not available on pump models with pressure transducer

²⁾ These options require Pro Electric

³⁾ Not available on 4 and 8 litres reservoirs

ZU4 Series



Reservoir Capacity:

4 - 40 litres

Flow at Rated Pressure:

1,0 l/min

Motor Size:

1,25 kW

Maximum Operating Pressure:

700 bar



Speed Chart

To determine how a specific pump will operate your cylinder, see the Pump-Cylinder Speed Chart in the 'Yellow Pages'.

Page: 273



Assisted Return Pumps with Venturi Valve Technology

To improve productivity and plunger retraction, Enerpac offers valve configurations designed to accelerate your cylinder retraction speeds, ZU4 and ZE-Series pumps feature **Venturi Valve Technology** to facilitate the faster return of single-acting gravity and spring return cylinders. See valve type in ordering matrix and details in section Directional Control Valves.

Page: 116



Ordering Example: ZU4108DE-HKT

is a Pro Electric model pump with LCD, 1,0 l/min oil flow at 700 bar, pump with a dump valve, an 8 liter reservoir, operates on 230V, heat exchanger, pressure transducer and skid bar.



Spring Centred Valve Kits

VM and VC-Series manual 3-position valves can be easily converted into spring centred valves. With these retro-fit kits the handle will automatically move into the neutral valve position when released.

Page: 117

ZE-Series, Electric Pumps

▼ Shown from left to right: ZE3304ME-K, ZE4110DE-FHR














Z Tough.
Dependable.
Innovative.
CLASS



Assisted Return Pumps with Venturi Valve Technology

To improve productivity and plunger retraction, Enerpac offers valve configurations designed to accelerate your cylinder retraction speeds, ZE-Series pumps feature **Venturi Valve Technology** to facilitate the faster return of single-acting gravity return cylinders. See valve type in ordering matrix and details in section Directional Control Valves.

| PUMP CONFIGURATIONS | | Pump Type | Used with Tool or Cylinder | | Valve Function ¹⁾ | | | Valve ¹⁾ Model Number | Useable Oil Capacity (litres) | | |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|----------------------------------|-------------------------------|------|--|
| For options and other model numbers see ordering matrix or contact your Enerpac office. (For Z-Class pumps with air motor see ZA-series pumps on page 110). Page:  | | |  |  |  |  |  | | | | |
| No valve, without electric box ²⁾ or LCD • For remote valves or pump mounting Enerpac VM-series valves. | |  | | | | | | – | 4,0 | | |
| | | | | | | | | – | 10,0 | | |
| | | | | | | | | – | 20,0 | | |
| | | | | | | | | – | 40,0 | | |
| MANUAL VALVE CONTROL | With manual valve, without electric box or LCD • Ideal choice for most application • Manual valve control, for single and double-acting applications • Venturi Valve (VM33VAC) for faster retract of single-acting cylinders. • Manual motor control • On/Off switch on 1-phase electric motor. |  | ● | – | ● | – | ● | VM32 | 4,0 | | |
| | | | ● | – | ● | ● | ● | VM33 | 8,0 | | |
| | | | ● | – | ● | ● | ● | VM33VAC | 10,0 | | |
| | | | – | ● | ● | ● | ● | VM43 | 20,0 | | |
| | | | – | ● | ● | ● | ● | VM43L | 40,0 | | |
| | | | | | | | | | | | |
| MANUAL VALVE CONTROL | With manual valve, with electric box and LCD • For single-acting or double-acting applications • Venturi Valve Technology (VM33VAC) for faster retract of single-acting cylinders. • On/off switch on 1-phase electric motor • All options available. |  | ● | – | ● | – | ● | VM32 | 4,0 | | |
| | | | ● | – | ● | – | ● | VM32 | 8,0 | | |
| | | | ● | – | ● | ● | ● | VM33VAC | 10,0 | | |
| | | | ● | – | ● | ● | ● | VM33L | 10,0 | | |
| | | | – | ● | ● | ● | ● | VM43 | 20,0 | | |
| | | | – | ● | ● | ● | ● | VM43L | 40,0 | | |
| | | | | | | | | | | | |
| REMOTE VALVE CONTROL | With solenoid dump valve, with electric box and LCD • Ideal for punching, crimping and cutting • For use when load holding is not required • Push-button pendant ³⁾ controls valve and motor • All options available. |  | ● | – | ● | – | ● | VE32D | 4,0 | | |
| | | | ● | – | ● | – | ● | VE32D | 8,0 | | |
| | | | ● | – | ● | – | ● | VE32D | 10,0 | | |
| | | | ● | – | ● | – | ● | VE32D | 20,0 | | |
| | | | ● | – | ● | – | ● | VE32D | 40,0 | | |
| | | | | | | | | | | | |
| | | With solenoid 3-position valve, with electric box and LCD • Ideal for production and lifting applications • 3-position valves (advance/hold/retract) • Venturi Valve Technology (VE33VAC) for faster retract of single-acting cylinders. • Push-button pendant ³⁾ controls valve and motor • All options available. |  | ● | – | ● | ● | ● | VE33 | 4,0 | |
| | | | | ● | – | ● | ● | ● | VE33VAC | 8,0 | |
| | | | | ● | – | ● | ● | ● | VE33 | 10,0 | |
| | | | | – | ● | ● | ● | ● | VE43 | 10,0 | |
| | | | | – | ● | ● | ● | ● | VE43 | 20,0 | |
| | | – | ● | ● | ● | ● | VE43 | 40,0 | | | |

¹⁾ See Valve Section (page 117) for hydraulic symbols and details.

²⁾ For No Valve, with Electric Box, see ordering matrix on page 103.

³⁾ Pendant includes 3 meters cord.

ZE-Series, Electric Pumps

- High-efficiency pump design – higher oil flow and by-pass pressure
- High-strength, moulded electrical box protects electronics, power supplies and LCD readout and stands up to harsh industrial environments
- IP54 protection and isolation class
- Back-lit LCD provides self test, diagnostic and read-out capabilities never before offered on an industrial pump (included on pump with electric valves, optional on other models)
- Totally enclosed, fan-cooled industrial electric motors for extended life
- User adjustable relief valve built-in on manual and solenoid valves. Oil ports on valves are 3/8" NPTF
- Steel fan guard on all electric motors
- Full sight oil level glass on 10, 20 and 40 litres reservoirs, oil level indicators on 4 and 8 litres reservoirs.
- 40 micron filter breather with splash guard
- Durable steel reservoirs.

ZE Series



Reservoir Capacity:

4 - 40 litres

Flow at Rated Pressure:

0,55 - 2,73 l/min

Motor Size:

0,75 - 5,60 kW

Maximum Operating Pressure:

700 bar

| ZE3-Series 0,55 l/min at 700 bar Two-stage pump | | ZE4-Series 0,82 l/min at 700 bar Two-stage pump | | ZE5-Series 1,64 l/min at 700 bar Two-stage pump | | ZE6-Series 2,73 l/min at 700 bar Two-stage pump | |
|-------------------------------------------------------|------|-------------------------------------------------------|------|-------------------------------------------------------|------|-------------------------------------------------------|------|
| Model Nr. ⁴⁾ 400V / 3 phase | (kg) | Model Nr. ⁴⁾ 400V / 3 phase | (kg) | Model Nr. ⁴⁾ 400V / 3 phase | (kg) | Model Nr. ⁴⁾ 400V / 3 phase | (kg) |
| ZE3004NW | 36 | ZE4004NW | 40 | – | – | – | – |
| ZE3010NW | 45 | ZE4010NW | 49 | ZE5010NW | 54 | ZE6010NW | 72 |
| ZE3020NW | 57 | ZE4020NW | 61 | ZE5020NW | 66 | ZE6020NW | 84 |
| ZE3040NW | 80 | ZE4040NW | 84 | ZE5040NW | 89 | ZE6040NW | 107 |
| ZE3204MW | 39 | ZE4204MW | 43 | – | – | – | – |
| ZE3308MW | 44 | ZE4308MW | 48 | – | – | – | – |
| ZE31010MW | 51 | ZE41010MW | 55 | ZE51010MW | 60 | ZE61010MW | 78 |
| ZE3420MW | 60 | ZE4420MW | 64 | ZE5420MW | 69 | ZE6420MW | 87 |
| ZE3840MW | 85 | ZE4840MW | 89 | ZE5840MW | 94 | ZE6840MW | 112 |
| ZE3204LW | 42 | ZE4204LW | 46 | – | – | – | – |
| ZE3208LW | 47 | ZE4208LW | 51 | – | – | – | – |
| ZE31010LW | 52 | ZE41010LW | 56 | ZE51010LW | 61 | ZE61010LW | 79 |
| ZE3610LW | 53 | ZE4610LW | 57 | ZE5610LW | 62 | ZE6610LW | 80 |
| ZE3420LW | 63 | ZE4420LW | 67 | ZE5420LW | 72 | ZE6420LW | 90 |
| ZE3840LW | 88 | ZE4840LW | 92 | ZE5840LW | 97 | ZE6840LW | 115 |
| ZE3104DW | 44 | ZE4104DW | 48 | – | – | – | – |
| ZE3108DW | 49 | ZE4108DW | 53 | – | – | – | – |
| ZE3110DW | 53 | ZE4110DW | 57 | ZE5110DW | 62 | ZE6110DW | 79 |
| ZE3120DW | 65 | ZE4120DW | 69 | ZE5120DW | 74 | ZE6120DW | 92 |
| ZE3140DW | 88 | ZE4140DW | 92 | ZE5140DW | 97 | ZE6140DW | 115 |
| ZE3304SW | 49 | ZE4304SW | 53 | – | – | – | – |
| ZE31108SW | 55 | ZE41108SW | 59 | – | – | – | – |
| ZE3310SW | 58 | ZE4310SW | 62 | ZE5310SW | 67 | ZE6310SW | 85 |
| ZE3410SW | 58 | ZE4410SW | 62 | ZE5410SW | 67 | ZE6410SW | 85 |
| ZE3420SW | 70 | ZE4420SW | 74 | ZE5420SW | 79 | ZE6420SW | 97 |
| ZE3440SW | 93 | ZE4440SW | 97 | ZE5440SW | 102 | ZE6440SW | 120 |

⁴⁾ See custom ordering matrix on page 95 for other voltages.



Adjustable Relief Valve

All VM and VE-Series have a user adjustable relief valve to allow the operator to easily set the optimum working pressure.



Locking Valves

For applications requiring positive load holding, VM-Series valves (except VM32) are available with a pilot-operated check valve. This

provides hydraulic locking of the load until the valve is shifted into the retract position. To order this feature on your ZE-series pump see the valve type in the order matrix.

Page: 103



Single or Two-Stage

Choose **single-stage** pumps for applications that require constant flow regardless of pressure such as testing or clamping.

Two-stage pumps have an increased output flow at low pressure to allow fast movement towards the load, for reduced cycle times and increased productivity.



Electric Box ¹⁾

- Back-lit LCD
- Pump usage information, hour and cycle counts
- Low-voltage warning and recording
- Self-test and diagnostic capabilities
- Pressure read-out ²⁾
- Auto-mode pressure setting ²⁾
- Information can be displayed in six languages ³⁾

¹⁾ Included on pumps with solenoid valves. Can be factory installed on pumps with manual valve.

²⁾ When used with optional pressure transducer.

³⁾ English, French, German, Italian, Spanish and Portuguese.



Level/Temperature Switch ⁴⁾

- Shuts down pump before oil level reaches an unsafe level, avoiding damage due to cavitation
- Shuts down pump when unsafe oil temperature is reached
- Ideal if pump is used in remote area without visual access to oil level.

⁴⁾ 24 V, requires Electric Box. Available for 10, 20 and 40 litres reservoirs.

| Accessory Kit Modelnr. | Fixed Temperature Signal (°C) | Operating Temperature (°C) | Max. Pressure (bar) |
|------------------------|-------------------------------|----------------------------|---------------------|
| ZLS-U4 * | 80 | 5 - 110 | 10 |

* Add suffix **L** for factory installation.



Return Line Filter

- 25 micron nominal filter removes contaminants from return oil flow before allowing it back into tank
- Internal by-pass valve prevents damage if filter is dirty
- With maintenance indicator
- Replaceable filter element PF25.

| Accessory Kit Modelnr. | Maximum Pressure (bar) | Maximum Oil Flow (l/min) | By-pass Setting (bar) |
|------------------------|------------------------|--------------------------|-----------------------|
| ZPF * | 13,8 | 45,4 | 1,7 |

* Add suffix **F** for factory installation.



Roll Cage

- For easy portability and hoisting
- Protects pump and electric box
- Available for all reservoir sizes.



Skid Bar


- Provides easy two-hand lift
- Provides greater pump stability on soft or uneven surfaces.



Foot Switch ⁵⁾

- Hands-free remote control on solenoid dump and 3-position valves
- With 3 meters cord.


⁵⁾ 15 V, requires Electric Box.

| Accessory Kit Nr. | Fits on reservoir size: |  (kg) |
|-------------------|------------------------------|------------------------------------------------------------------------------------------|
| ZRC-04 * | 4 and 8 litres ⁵⁾ | 5,5 |
| ZRC-04H * | 4 and 8 litres ⁶⁾ | 6,5 |
| ZRB-10 * | 10 litres | 6,0 |
| ZRB-20 * | 20 litres | 6,0 |
| ZRB-40 * | 40 litres | 6,0 |

* Add suffix **R** for factory installation.

⁵⁾ For pump without heat exchanger

⁶⁾ For pump with heat exchanger.

| Accessory Kit Nr. | Fits on reservoir size: |  (kg) |
|-------------------|------------------------------|------------------------------------------------------------------------------------------|
| SBZ-4 * | 4 and 8 litres ⁵⁾ | 2,2 |
| SBZ-4L * | 4 and 8 litres ⁶⁾ | 3,2 |

* Add suffix **K** for factory installation.

| Accessory Kit Nr. | Can be used on ZE-Series pumps with |
|-------------------|-------------------------------------|
| ZCF-2 * | Solenoid VE-Series valves |

* Add suffix **U** for factory installation.

ZE-Series, Options & Accessories



Pressure Transducer ¹⁾

- Displays pressure on LCD in bar, MPa or psi
- More accurate than analog gauge
- Calibration can be fine-tuned for certification
- Easy-viewing variable rate display
- “Set pressure” feature turns off motor at user defined pressure ²⁾.

¹⁾ 24 V, requires Electric Box.

²⁾ Or shifts valve to neutral position on pump models with VE33 and VE43 solenoid valves.

| Access-ory Kit Modelnr. | Adjustable Pressure Range (bar) | Switch-point repeatability | Dead-band (bar) |
|-------------------------|---------------------------------|----------------------------|-----------------|
| ZPT-U4 * | 3,5 - 700 | ± 0,5% | 3,5 |

* Add suffix **T** for factory installation.



Pressure Switch ³⁾

- Controls pump, monitors system
- Adjustable pressure 35-700 bar
- Includes glycerine filled 1000 bar pressure gauge G2536L
- Accuracy ± 1,5% of full scale.

³⁾ 24 V, requires Electric Box. Not available in combination with pressure transducer. Not available on LCD-electronics.

| Access-ory Kit Modelnr. | Switch-point repeatability | Deadband (bar) | Oil Ports (NPTF) |
|-------------------------|----------------------------|----------------|------------------|
| ZPS-E3 * | ± 2% | 8 - 38 | 3/8" |

* Add suffix **P** for factory installation.



Options

Accessory Kits can be installed by customer. See chart below for options on **Standard Electric** (without electric box) or **LCD Electric** (with electric box). Refer to page 103 for ordering matrix.

| ZE-Series Options | Factory Installed | | Accessory Kits | |
|-----------------------------------|-------------------|-------------|----------------|-------------|
| | Std. Electr. | LCD Electr. | Std. Electr. | LCD Electr. |
| Return Line Filter | F | F | ZPF | ZPF |
| Skid Bar ¹⁾ | K | K | SBZ | SBZ |
| Roll Cage | R | R | ZRB | ZRB |
| Single-stage | S | S | - | - |
| Heat Exchanger | - | H | - | ZHE |
| Pressure Gauge ²⁾ | G | G | - | - |
| Pressure Switch ³⁾ | - | P | - | ZPS-E3 |
| Pressure Transducer ⁴⁾ | - | T | - | ZPT-U4 |
| Level/Temp Switch ⁵⁾ | - | L | - | ZLS-U4 |
| Foot Switch ⁶⁾ | - | U | - | ZCF-2 |

¹⁾ Available for 4 and 8 litres reservoirs.

²⁾ Not available on pumps with pressure transducer.

³⁾ Includes 1000 bar gauge. Only available on manual valves without locking feature.

⁴⁾ Electric box can accept either pressure switch or pressure transducer, but not both.

⁵⁾ Available for 10, 20 and 40 litres reservoirs.

⁶⁾ For control of solenoid dump and 3-position valves.



Pendants ⁴⁾

- For pump types with valve operation “W” (No Valve, with Electric Box, without pendant).

⁴⁾ When ordering Enerpac VE-Series solenoid valve the pendant must be ordered separately. Pendant connection to be plugged into electric box.

| Pendant Model Nr. | To be used with solenoid valve: |
|-------------------|---------------------------------|
| ZCP-1 | VE32D |
| ZCP-3 | VE32, VE33, VE43 |



Heat Exchanger ⁵⁾

- Removes heat from by-pass oil to provide cooler operation
- Stabilizes oil viscosity, increasing oil life and reduces wear of pump and other hydraulic components.

| Accessory Kit Nr. | Fits on reservoir size: | (kg) |
|-------------------|-------------------------|------|
| ZHE-E04 * | 4 and 8 litres | 4,1 |
| ZHE-E10 * | 10, 20 and 40 litres | 4,1 |

⁵⁾ 24 VDC, requires electric box.

* Add suffix **H** for factory installation.



ZPT-U4 Pressure Transducer

More durable against mechanical and hydraulic shock than analog gauges.

- Digital pressure read-out provides accuracy of 0,5% of full scale.
- Easy-viewing variable rate display automatically varies increments between 3, 14, 35 and 145 bar as rate of pressure change increases.
- “Set pressure” feature turns off motor at user defined pressure (or shifts valve to neutral on VE33 and VE43 valves).




ZHE-Series Heat Exchangers

Heat exchanger stabilizes oil temperature at 54 °C at 21 °C ambient temperature. Thermal transfer at 1,9 l/min and 21 °C ambient temperature: 900 Btu/hour [950 kJ].

Do not exceed max. oil flow of 26,5 l/min and max. pressure of 20,7 bar. Not suitable for water-glycol or high water based fluids.

ZE-Series, Specifications & Dimensions

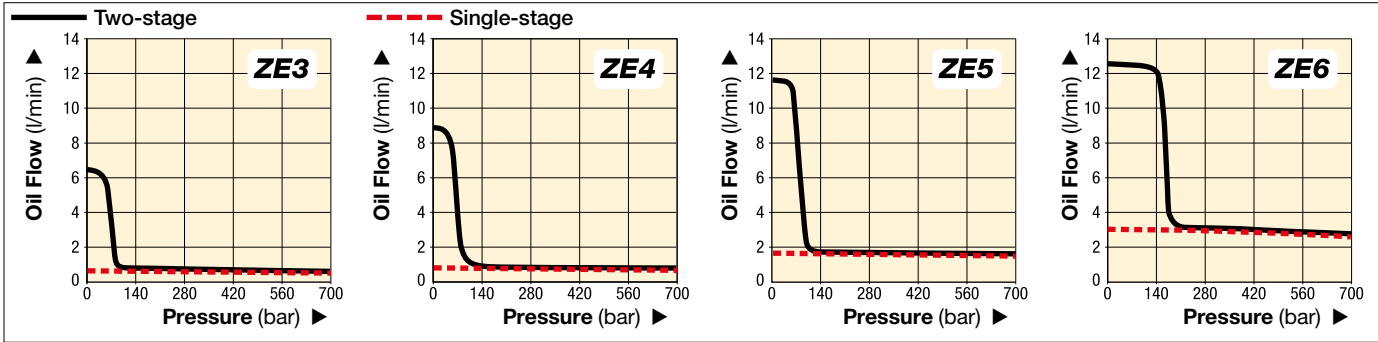

▼ ZE-SERIES PERFORMANCE CHART


| Pump Series | Output Flow Rate at 50 Hz * (l/min) | | | | Pump Unit | Available Reservoir Sizes (useable oil) (litres) | Motor Size (kW) | Relief Valve Adjustment Range (bar) | Sound Level (dBA) |
|-------------|-------------------------------------|------------------------|--------------------------|--------------------------|--------------|--------------------------------------------------|-----------------|-------------------------------------|-------------------|
| | low pressure at 7 bar | low pressure at 50 bar | high pressure at 350 bar | high pressure at 700 bar | | | | | |
| ZE3 | 0,59 | 0,59 | 0,57 | 0,55 | Single-stage | 4-8-10-20-40 | 0,75 | 70-700 | 75 |
| | 6,15 | 5,26 | 0,57 | 0,55 | Two-stage | | | | |
| ZE4 | 0,87 | 0,87 | 0,84 | 0,82 | Single-stage | 4-8-10-20-40 | 1,12 | 70-700 | 75 |
| | 8,88 | 8,20 | 0,84 | 0,82 | Two-stage | | | | |
| ZE5 | 1,75 | 1,72 | 1,68 | 1,64 | Single-stage | 10-20-40 | 2,24 | 70-700 | 75 |
| | 11,61 | 11,27 | 1,68 | 1,64 | Two-stage | | | | |
| ZE6 | 3,00 | 2,94 | 2,86 | 2,73 | Single-stage | 10-20-40 | 5,60 | 70-700 | 80 |
| | 12,29 | 12,15 | 2,86 | 2,73 | Two-stage | | | | |

* Oil flow will be approximately 6/5 of these values at 60 Hz.




Single or Two-Stage

Choose single-stage pumps for applications that require constant flow regardless of pressure such as testing or clamping. Two-stage pumps have an increased output flow at low pressure to allow fast movement towards the load, for reduced cycle times and increased productivity.

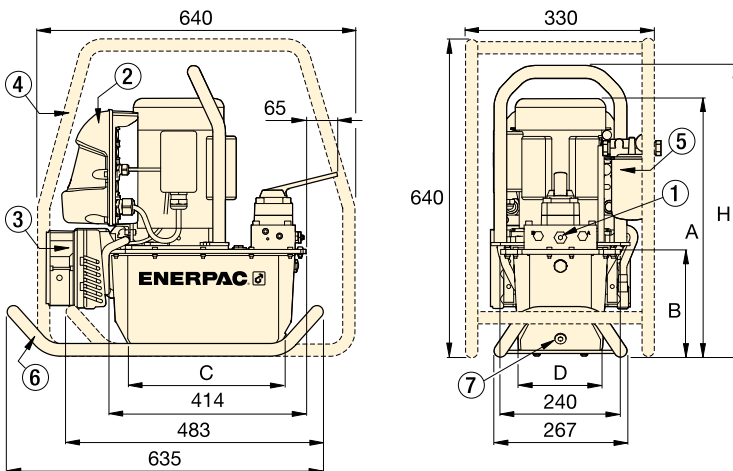

ZE-Series Pumps with 4 - 8 litres reservoir

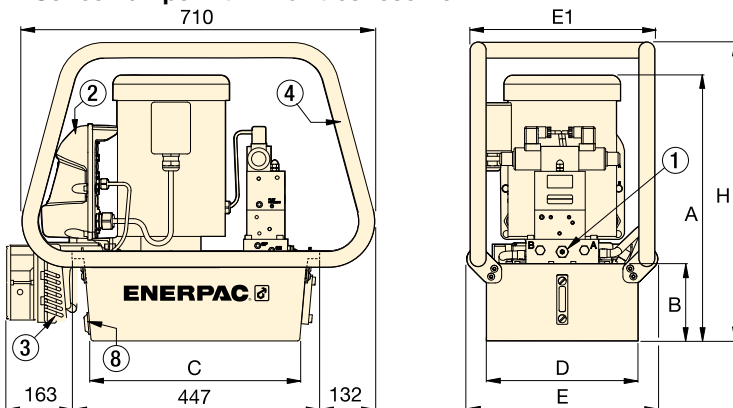

ZE-Series Pumps with 10 - 20 - 40 litres reservoir

- ① User adjustable relief valve on all manual and solenoid valves.
3/8" NPTF on A and B ports;
1/4" NPTF on auxiliary ports.
- ② Electric Box
- ③ Heat Exchanger
- ④ Roll Cage
- ⑤ Return Line Filter
- ⑥ Skid Bar
- ⑦ Magnetic Oil Drain
- ⑧ Oil Drain / Oil Level/Temperature Switch

| Reservoir Size (useable oil in litres) | ZE-Series Pump Dimensions (mm) | | | | | | |
|----------------------------------------|--------------------------------|-----|-----|-----|-----|-----|-----|
| | A | B | C | D | E | E1 | H |
| 4,0 | 457 | 143 | 279 | 152 | - | - | 513 |
| 8,0 | 457 | 143 | 279 | 206 | - | - | 513 |
| 10,0 | 533 | 158 | 419 | 305 | 384 | 371 | 600 |
| 20,0 | 558 | 180 | 419 | 422 | 501 | 488 | 625 |
| 40,0 | 648 | 270 | 399 | 505 | 576 | 572 | 715 |

ZE-Series, Pump Ordering Matrix

▼ This is how ZE-Series pump model numbers are built up:

| | | | | | | | | | | | |
|----------------------|--------------------|--------------------|--------------------|-----------------------------|-------------------------|-----------------------|----------|------------------------------|----------|----------|----------|
| Z | E | 4 | 1 | 10 | D | W | - | F | H | L | T |
| 1 Product Type | 2 Motor Type | 3 Flow Group | 4 Valve Type | 5 Reser- voir Size | 6 Valve Operation | 7 Motor Voltage | | 8 Options and Accessories | | | |

1 Product Type

Z = Pump Class

2 Prime Mover

E = Induction electric motor

3 Flow Group

- 3** = 0,55 l/min @ 700 bar (0,75 kW)
- 4** = 0,82 l/min @ 700 bar (1,12 kW)
- 5¹⁾** = 1,64 l/min @ 700 bar (2,24 kW)
- 6¹⁾** = 2,73 l/min @ 700 bar (5,60 kW)

4 Valve Type

- 0** = No valve, with cover plate
- 1** = 3/2 Dump valve **VE32D**
- 2** = 3/2 manual **VM32**
- 3** = 3/3 manual **VM33** or electric **VE33**
- 4** = 4/3 manual **VM43** or electric **VE43**
- 6** = 3/3 manual locking valve **VM33L** with pilot operated check.
- 8** = 4/3 manual locking valve **VM43L** with pilot operated check.
- 9** = 4 way/3 position manual with power seating (**VM43-LPS**)
- 10** = 3 way/3 position manual **Venturi** valve (**VM33VAC**)
- 11** = 4 way/3 position electric **Venturi** valve (**VE33VAC**)
- 12** = 3 way/3 position manual locking **Venturi** valve (**VM33LVAC**)

8 Options and Accessories

- F** = Return Line Filter
- G⁶⁾** = 1000 bar gauge
- H⁷⁾** = Heat exchanger
- K** = Skid Bar (only on 4 and 8 litres)
- L⁷⁾** = Oil Level/Temperature Switch⁸⁾
- N** = No reservoir handles (includes lifting eyes)

5 Reservoir Size, useable oil

- 04²⁾** = 4 litres
- 08²⁾** = 8 litres
- 10** = 10 litres
- 20** = 20 litres
- 40** = 40 litres

6 Valve Operation

- D** = Dump valve (solenoid), with pendant and Electric Box (LCD)
- L** = Manual valve, without pendant, with Electr. Box (LCD)
- M** = Manual valve, without pendant, without Electric Box
- N** = No valve, without Electric Box
- S** = Solenoid valve, with pendant and Electric Box (LCD)
- W** = No valve, with Electric Box (LCD), without pendant¹⁰⁾

7 Motor Voltage

Single phase motor³⁾

- B³⁾** = 115V, 1 ph, 50-60Hz
- E³⁾** = 208-240V, 1 ph, 50-60 Hz⁴⁾
- I** = 208-240V, 1 ph, 50-60 Hz USA plug

Three phase motor⁵⁾

- M⁵⁾** = 190-200V, 3 ph, 50-60Hz
- G⁵⁾** = 208-240V, 3 ph, 50-60 Hz
- W⁵⁾** = 380-415V, 3 ph, 50-60 Hz
- K⁵⁾** = 440V, 3 ph, 50-60 Hz
- J⁵⁾** = 460-480V, 3 ph, 50-60 Hz
- R⁵⁾** = 575V, 3 ph, 60 Hz

- P⁷⁾** = Pressure Switch (only available on manual valves without locking feature)
- R** = Roll Cage
- S** = Single-stage pump unit
- T⁷⁾** = Pressure transducer⁹⁾
- U⁷⁾** = Foot Switch

¹⁾ ZE5 and ZE6-Series only available with 3-phase electric motors.
²⁾ 4 and 8 litres only available on ZE3 and ZE4-Series.
³⁾ 1-phase motors only available on ZE3 and ZE4-Series
⁴⁾ 208-240V, 1 ph with European plug EMC directive compliant.
⁵⁾ Models with 3-ph motors without Electric Box shipped without cord, motor starter or overload protection.
⁶⁾ Not available on pumps with pressure transducer (T).
⁷⁾ Requires Electric Box.
⁸⁾ Not available on 4 and 8 litres reservoir.
⁹⁾ Provides digital pressure read-out on LCD-display of electric box.
¹⁰⁾ When using solenoid valve on valve type "W" order optional pendant.

All Z-Class electric pumps comply with TÜV and CE requirements.



ZE Series



Reservoir Capacity:

4 - 40 litres

Flow at Rated Pressure:

0,55 - 2,73 l/min

Motor Size:

0,75 - 5,60 kW

Maximum Operating Pressure:

700 bar



How to Order Single-Stage Pumps

To specify a single-stage pump, place the letter "S" at the end of the model number. For example:

ZE4210ME-S

ZE4-Series pump, oil flow 0,82 l/min at 700 bar, VM32 manual valve, 10 litres reservoir, without electrical box, without pendant, 240 Volt 1-phase electric motor and single-stage pump unit.



Assisted Return Pumps

To improve productivity and plunger retraction, Enerpac offers valve configurations designed to accelerate your cylinder retraction speeds, ZU4 and ZE-Series pumps feature **Venturi Valve Technology** to facilitate the faster return of single-acting gravity and spring return cylinders. See valve type in ordering matrix and details in section Directional Control Valves.

PA-Series, Air Hydraulic Foot Pumps

▼ Shown: PA-1150, PA-133



PA Series

Reservoir Capacity:
0,6 - 1,3 litres

Flow at Rated Pressure:
0,13 l/min

Air Consumption:
255 l/min

Maximum Operating Pressure:
700 bar



Reservoir Conversion Kit

Double the reservoir capacity of your existing PA-133 with this easy to install conversion kit.



Model Number

PC-66

- Rugged construction – built for long life and easy service
- Swivel coupling simplifies hydraulic connection and pump operation
- Three-position treadle provides cylinder advance, hold or retract operation
- Operates in all positions for increased versatility in use and mounting (except PA-1150)
- Base mounting slots provided on PA-133.

OIL FLOW VERSUS PRESSURE

at 6,9 bar air pressure

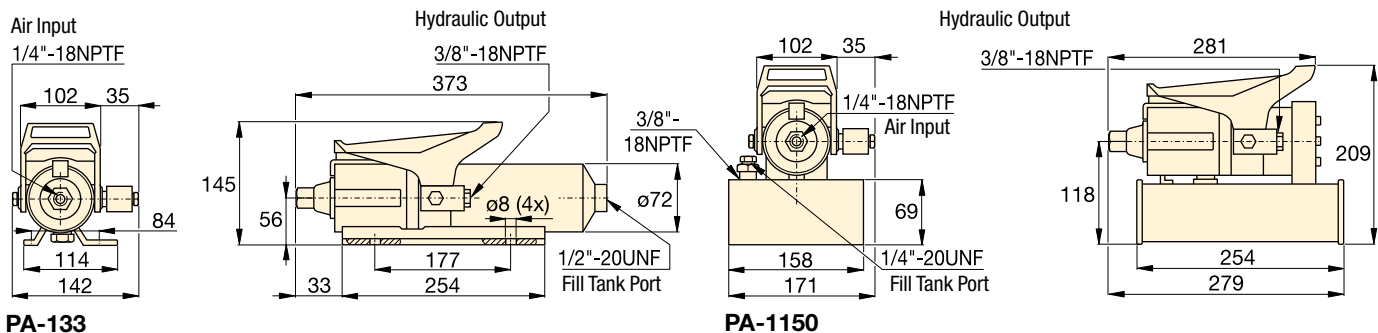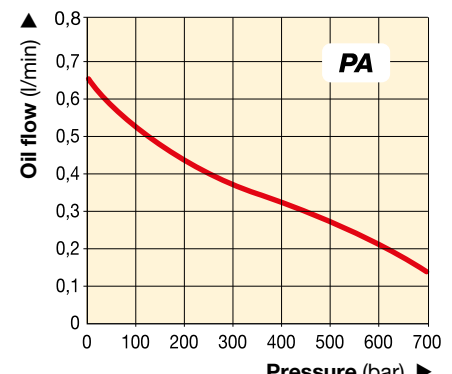

| Used with Cylinder | Usable Oil Capacity (cm ³) | Model Number | Pressure Rating (bar) | Output Flow Rate (l/min) | | Valve Function | Air Pressure Range * (bar) | Air Consumption (l/min) | Sound Level (dBA) | Weight (kg) |
|--------------------|----------------------------------------|--------------|-----------------------|--------------------------|------|--------------------------|----------------------------|-------------------------|-------------------|-------------|
| | | | | No load | Load | | | | | |
| Single-Acting | 589 | PA-133 | 700 | 0,65 | 0,13 | Advance / Hold / Retract | 4,1 - 8,3 | 255 | 85 | 5,4 |
| | 1311 | PA-1150 | 700 | 0,65 | 0,13 | Advance / Hold / Retract | 4,1 - 8,3 | 255 | 85 | 8,2 |

* Recommended Regulator-Filter-Lubricator: RFL-102.

PAM-Series, Air Hydraulic Pumps

▼ Shown: PAM-1041



PAM Series

Reservoir Capacity:
4,0 - 8,0 litres

Flow at Rated Pressure:
0,15 l/min

Air Consumption:
510 l/min

Maximum Operating Pressure:
700 bar



Locking Valves

Pumps with 4/3 manual valves are available with 4/3 manual locking valves instead. Add suffix "L" to pump model number.

Page: 116




Remote Air Valve

For remote operation of PAM-Series air pumps. Permits either hand or foot operation.

Model Number


VA-2

- Twin air motor configuration delivers high-flow performance in first stage, up to 14 bar, for rapid cylinder advance
- 4 and 8 litres reservoirs for use with a wide range of cylinders
- Integral shroud protects air motors and provides easy portability.

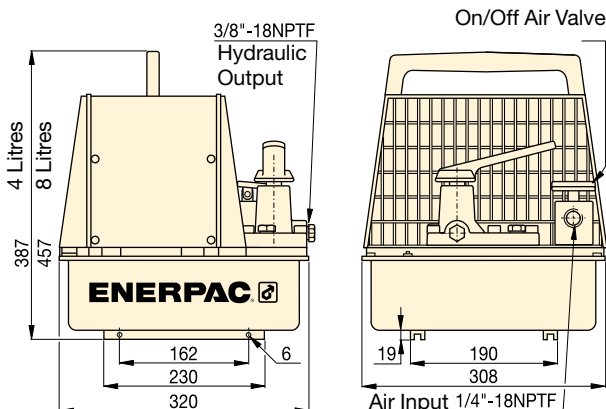

OIL FLOW VERSUS PRESSURE

at 6,9 bar air pressure

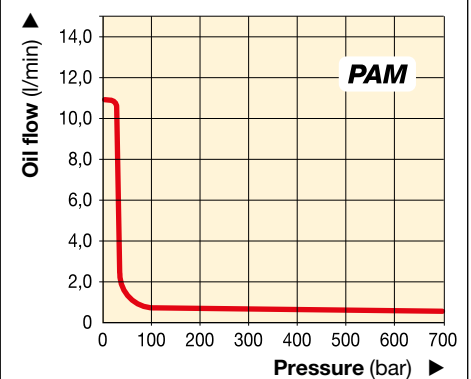

| Used with Cylinder | Usable Oil Cap. (litres) | Model Number with Shroud | Pressure Rating (bar) | Output Flow Rate (l/min) | | Valve Function | Valve Type | Air Pressure Range * (bar) | Air Consumption (l/min) | Sound Level (dBA) | Weight (kg) |
|--------------------|--------------------------|--------------------------|-----------------------|--------------------------|-----------------------|--------------------------|------------|----------------------------|-------------------------|-------------------|-------------|
| | | | | 1 st stage | 2 nd stage | | | | | | |
| Single-Acting | 2,6 | PAM-1021 | 700 | 10,65 | 0,15 | Advance / Hold / Retract | 3/2 | 4,1 - 8,3 | 510 | 87 | 22,7 |
| | 7,6 | PAM-1022 | 700 | 10,65 | 0,15 | Advance / Hold / Retract | 3/2 | 4,1 - 8,3 | 510 | 87 | 27,2 |
| Double-Acting | 2,6 | PAM-1041 | 700 | 10,65 | 0,15 | Advance / Hold / Retract | 4/3 | 4,1 - 8,3 | 510 | 87 | 22,7 |
| | 7,6 | PAM-1042 | 700 | 10,65 | 0,15 | Advance / Hold / Retract | 4/3 | 4,1 - 8,3 | 510 | 87 | 27,2 |

* Recommended Regulator-Filter-Lubricator: RFL-102.

▼ Shown from top to bottom: PAMG-1402N, PARG-1102N, PATG-1102N, PATG-1105N



- External adjustable pressure relief valve (behind sight glass)
- Return-to-tank port for use in remote valve applications
- Internal pressure relief valve provides overload protection
- Quieter operation – reduced noise level to 76 dBA
- Operating air pressure: 2,8 - 8,8 bar, enables pump to start at extremely low pressure
- High efficiency cast aluminium air motor
- Reinforced heavy-duty lightweight reservoir for applications in tough environments
- Air pendant for remote control operation.

Compact Air Over Hydraulic



Regulator-Filter-Lubricator

Recommended for use with all Turbo air pumps. Provides clean, lubricated air and allows for air pressure adjustment. Steel bowl guards are standard.

Model Number

RFL-102



Large Reservoir Models

The Turbo II Air Pump is also available with an enlarged reservoir: **PATG-1105N**, **PAMG-1405N** and **PARG-1105N**.



Hoses

Enerpac offers a complete line of high quality hydraulic hoses. To ensure the integrity of your system, specify only genuine Enerpac hydraulic hoses.

Page: **122**

▼ Easily operated by hand or by foot.



| Used with Cylinder | Usable Oil Capacity (cm ³) | Model Number |
|--------------------|----------------------------------------|-------------------|
| Single-Acting | 2081 | PATG-1102N |
| | 3770 | PATG-1105N |
| Single-Acting | 2081 | PARG-1102N |
| | 3770 | PARG-1105N |
| Double-Acting | 2081 | PAMG-1402N |
| | 3770 | PAMG-1405N |


PA-Series, Turbo II Air Hydraulic Pumps



PATG-models use a foot or hand operated treadle to control air and valve functions.

PAMG-models use a treadle with a locking feature to control air, and a 4-way manual valve to control hydraulics.

PARG-models use air pendant for remote control.

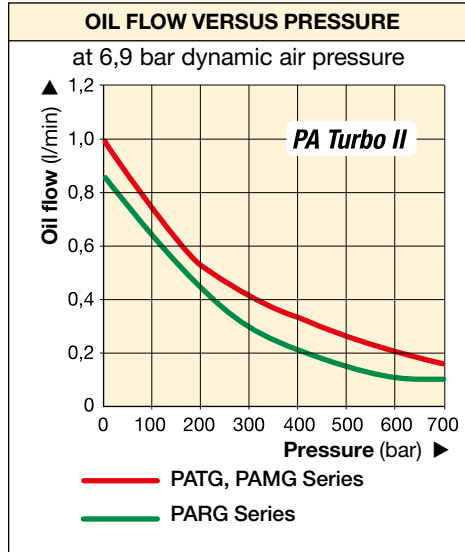

**PATG
PAMG
PARG
Series**



Reservoir Capacity:
2,5 - 5,0 litres

Flow at Rated Pressure:
0,10 - 0,16 l/min

Air Consumption:
227 - 340 l/min

Maximum Operating Pressure:
700 bar

| Maximum Pressure (bar) | Output Flow Rate (l/min) | | Pump Series | Valve Function | Air Pressure Range (bar) | Air Consumption at 5,2 bar air (l/min) | Sound Level (dBA) |
|---------------------------|-----------------------------|------|-------------|----------------|-----------------------------|-------------------------------------------|----------------------|
| | No Load | Load | | | | | |
| 700 | 1,00 | 0,16 | PATG | A / H / R * | 2,8 - 8,8 | 340 | 76 |
| 700 | 0,76 | 0,10 | PARG | A / H / R * | 2,8 - 10,3 | 227 | 76 |
| 700 | 1,00 | 0,16 | PAMG | A / H / R * | 2,8 - 8,8 | 340 | 76 |


* Valve function: Advance / Hold / Retract.



Speed Chart

To determine how a specific pump will operate your cylinder, see the Pump-Cylinder Speed Chart in the 'Yellow Pages'.

Page: 273

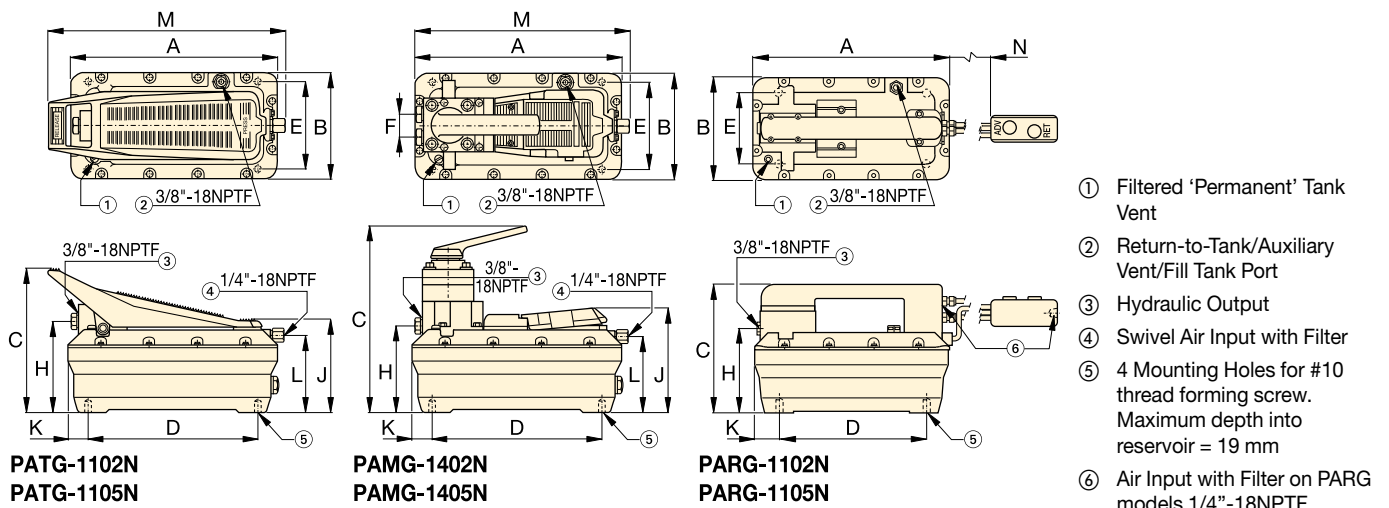

| Valve Operation | Turbo II Dimensions (mm) | | | | | | | | | | | | | Model Number |
|-----------------|--------------------------|-----|-----|-----|-----|----|-----|-----|----|-----|-----|------|------|-------------------|
| | A | B | C | D | E | F | H | J | K | L | M | N | (kg) | |
| Treadle 3/3 | 313 | 165 | 211 | 230 | 102 | - | 129 | 146 | 42 | 113 | 347 | - | 8,2 | PATG-1102N |
| | 396 | 201 | 209 | 230 | 102 | - | 131 | 146 | 86 | 112 | 437 | - | 9,9 | PATG-1105N |
| Air Pendant 3/3 | 313 | 165 | 200 | 230 | 102 | - | 129 | - | 42 | - | - | 4500 | 10,0 | PARG-1102N |
| | 396 | 201 | 209 | 230 | 102 | - | 131 | - | 86 | - | - | 4500 | 11,7 | PARG-1105N |
| Manual 4/3 | 313 | 165 | 267 | 230 | 102 | 36 | 130 | 152 | 42 | 113 | 315 | - | 11,0 | PAMG-1402N |
| | 396 | 201 | 267 | 230 | 102 | 36 | 132 | 152 | 86 | 112 | 405 | - | 12,7 | PAMG-1405N |

▼ Shown: XA11G



- Ergonomic design for less operator fatigue
- Variable oil flow & fine metering for precise control
- Higher oil flow for increased productivity
- Closed hydraulic system prevents contamination and allows pump usage in any position
- Pedal lock function for retract position
- External adjustable pressure setting valve
- Ground screw for improved ATEX explosion safety.

 II 2 GD ck T4

▼ Easy operated by foot. No need to fully lift up foot – rest bodyweight on heel, resulting in a handsfree and stabile working position.



Productivity & Ergonomics



Optional Pressure Gauge

Integrated gauge with calibrated scale reading in bar, psi and MPa for actual pressure reading.



4/3 Control Valve

For powering double-acting hydraulic cylinders and tools.



2 Litres Reservoir

Double oil capacity for powering larger hydraulic cylinders and tools.



Pedal Safety Guard

Customer installed frame protects both pedals against accidental activation.

Model Number¹⁾

XPG1



“Joy-stick” Lever Kit

Customer installed set of handles for manual operation of both pedals.

Model Number¹⁾

XLK1



Swivel Connector

Customer installed swivel connector for optimal orientation of the hydraulic hose. See page 127 for details.

Model Number¹⁾

XSC1

¹⁾ Accessories must be ordered separately.

Air Driven Hydraulic Foot Pumps



Production Application

XA11 pump is used with a 13 tons hollow cylinder to compress and position diesel engine valve springs. The operator benefits from the fine metering capacities of this pump to apply the mandatory precise stroke and force.

XA Series



Reservoir Capacity:
1,0 - 2,0 litres


Flow at Rated Pressure:
0,25 l/min

Air Consumption:
283 - 991 l/min


Maximum Operating Pressure:
700 bar

▼ XA-SERIES PERFORMANCE CHART

| Maximum Pressure (bar) | Output Flow Rate (l/min) | | Pump Series | Valve Function | Dynamic Air Pressure (bar) |
|---------------------------|-----------------------------|------|-------------|--------------------------|-------------------------------|
| | No load | Load | | | |
| 700 | 2,0 | 0,25 | XA1 | Advance / Hold / Retract | 2,1 - 8,6 |

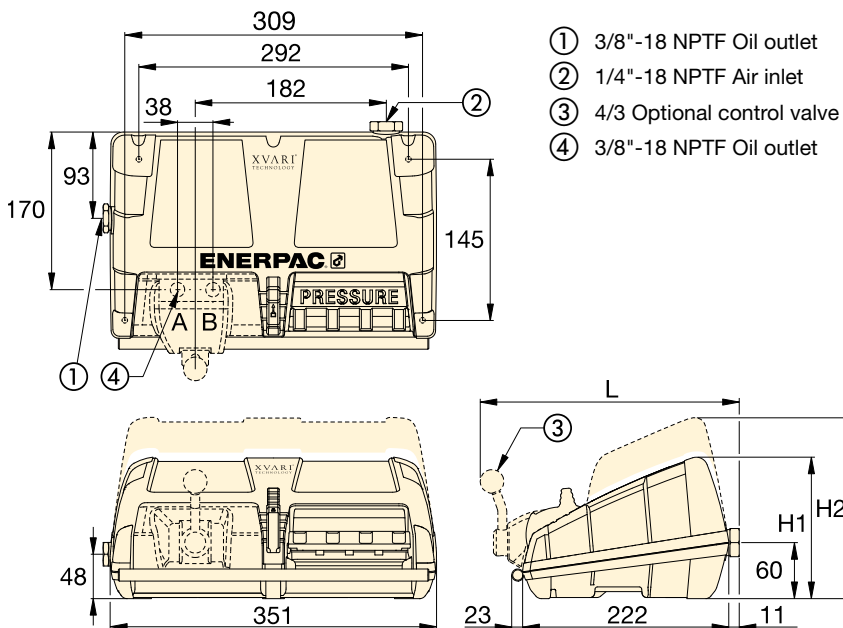

OIL FLOW VERSUS PRESSURE

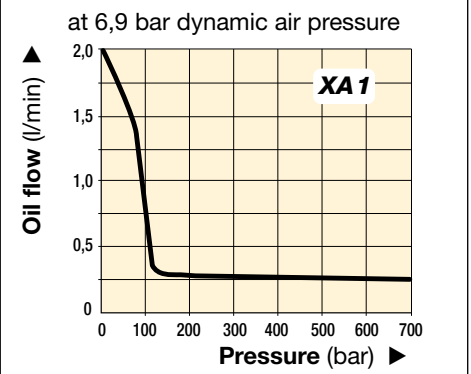


Regulator-Filter-Lubricator

Recommended for use with all XA-Series Air pumps. Provides clean, lubricated air and allows for air pressure adjustment.

Model Number ¹⁾

RFL-102

▼ SELECTION CHART

| For use with cylinder or tool | Usable Oil Capacity (litres) | Model Number ¹⁾ | Pressure Gauge | 3-way 3-pos. Valve | 4-way 3-pos. Valve | Dimensions (mm) | | |  (kg) |
|-------------------------------|------------------------------|----------------------------|----------------|--------------------|--------------------|-----------------|-----|-----|--------------------------------------------------------------------------------------------|
| | | | | | | H1 | H2 | L | |
| Single-acting | 1,0 | XA 11 ²⁾ | – | • | – | 152 | – | – | 8,6 |
| | 2,0 | XA 12 ²⁾ | – | • | – | – | 170 | – | 10,2 |
| Single-acting | 1,0 | XA 11G | • | • | – | 152 | – | – | 8,8 |
| | 2,0 | XA 12G | • | • | – | – | 170 | – | 10,4 |
| Double-acting | 1,0 | XA 11V | – | – | • | 152 | – | 279 | 10,1 |
| | 2,0 | XA 12V | – | – | • | – | 170 | 279 | 11,7 |
| Double-acting | 1,0 | XA 11VG | • | – | • | 152 | – | 279 | 10,3 |
| | 2,0 | XA 12VG | • | – | • | – | 170 | 279 | 11,9 |

¹⁾ High-Flow coupler CR-400 and accessories must be ordered separately. ²⁾ Available as cylinder-pump set, see page 58.

▼ Shown: ZA4208MX, ZA4420MX



Z Tough Dependable Innovative CLASS



ATEX 95 Certified

The Enerpac ZA4-series air pumps are tested and certified according to the **Equipment Directive 94 / 9 / EC "ATEX Directive"** for equipment and protective systems intended for use in potentially explosive atmospheres.



Page: 263

- ATEX 95 certified for use in potentially explosive atmospheres
- Features Z-Class high efficiency pump design, higher oil flow and bypass pressure
- Two-speed operation reduces cycle time for improved productivity
- User adjustable relief valve built-in on manual valves. Oil ports on valves are 3/8" NPTF
- Optional heat exchanger warms exhaust air to prevent freezing and cools the oil
- Full sight oil level glass on 10, 20 and 40 litres reservoirs, oil level indicators on 4 and 6,6 litres reservoirs.



Speed Chart

To determine how a specific pump will operate your cylinder, see the Pump-Cylinder Speed Chart in the 'Yellow Pages'.

Page: 273



Hoses

Enerpac offers a complete line of high quality hydraulic hoses. To ensure the integrity of your system, specify only genuine Enerpac hydraulic hoses.

Page: 122

| Used with Cylinder | Usable Oil Capacity (litres) | Manual Valve ¹⁾ Model Number | Valve Function | Model Number | Output Flow Rate ²⁾ | | | | Relief Valve Adjustment Range (bar) | Maximum Air Consumption ³⁾ (l/min) |
|--------------------|------------------------------|-----------------------------------------|-------------------------|--------------|--------------------------------|-----------|------------|------------|-------------------------------------|-----------------------------------------------|
| | | | | | at 7 bar | at 50 bar | at 350 bar | at 700 bar | | |
| – | 4,0 | – | – | ZA4004NX | 14,0 | 11,0 | 1,8 | 1,3 | – | 2840 |
| Single-acting | 4,0 | VM32 | Advance / Retract | ZA4204MX | 14,0 | 11,0 | 1,8 | 1,3 | 70 - 700 | 2840 |
| | 6,6 | VM33 | Advance / Hold /Retract | ZA4308MX | 14,0 | 11,0 | 1,8 | 1,3 | 70 - 700 | 2840 |
| | 10,0 | VM33L | Advance / Hold /Retract | ZA4610MX | 14,0 | 11,0 | 1,8 | 1,3 | 70 - 700 | 2840 |
| Double-acting | 4,0 | VM43 | Advance / Hold /Retract | ZA4404MX | 14,0 | 11,0 | 1,8 | 1,3 | 70 - 700 | 2840 |
| | 6,6 | VM43 | Advance / Hold /Retract | ZA4408MX | 14,0 | 11,0 | 1,8 | 1,3 | 70 - 700 | 2840 |
| | 10,0 | VM43L | Advance / Hold /Retract | ZA4810MX | 14,0 | 11,0 | 1,8 | 1,3 | 70 - 700 | 2840 |
| | 20,0 | VM43 | Advance / Hold /Retract | ZA4420MX | 14,0 | 11,0 | 1,8 | 1,3 | 70 - 700 | 2840 |
| | 40,0 | VM43 | Advance / Hold /Retract | ZA4440MX | 14,0 | 11,0 | 1,8 | 1,3 | 70 - 700 | 2840 |

¹⁾ See pages 116-117 for hydraulic symbols of these valves.

²⁾ Actual oil flow will vary with air supply.

³⁾ Dynamic air pressure range: 4 - 7 bar.

Modulair Air Hydraulic Pumps

▼ This is how a ZA4-Series pump model number is built up:



1 Product Type

Z = Pump Class

2 Prime Mover

A = Air motor

3 Flow Group

4 = 1,3 l/min @ 700 bar

4 Valve Type

- 0** = No valve, with cover plate
- 2** = 3/2 manual valve VM32
- 3** = 3/3 manual valve VM33
- 4** = 4/3 manual valve VM43
- 6** = 3/3 manual locking valve VM33L with pilot operated check
- 7** = 3/2 manual valve VM22
- 8** = 4/3 manual locking valve VM43L with pilot operated check.

5 Reservoir Size, useable oil

- 04** = 4 litres
- 08** = 6,6 litres
- 10** = 10 litres
- 20** = 20 litres
- 40** = 40 litres

6 Valve Operation

- M** = Manual valve
- N** = No valve

7 Motor Voltage

- X** = Not applicable

8 Options

- F** = Return Line Filter
- G** = 1000 bar gauge
- H** = Heat exchanger (on 4 and 6,6 litres reservoir only)
- K** = Skid Bar (on 4 and 6,6 litres reservoir only)
- N** = No reservoir handles (includes lifting eyes on 10, 20 and 40 litres)
- R** = Roll Cage

Ordering Example

Model Number: **ZA4208MX-FHK**
 ZA4208MX-FHK is an air operated pump with a 3-way, 2-position manual valve, 6,6 litres reservoir, filter, heat exchanger and skid bar.

ZA4 Series



Reservoir Capacity:

4 - 40 litres

Flow at Rated Pressure:

1,3 l/min


Air Consumption:

2840 l/min


Maximum Operating Pressure:

700 bar

- ① User adjustable relief valve on all manual valves. 3/8" NPTF on A and B ports; 1/4" NPTF on auxiliary ports.
- ② Air inlet 1/2" NPTF
- ③ Return Line Filter (optional)
- ④ Oil Sight Gauge
- ⑤ Roll Cage (optional)
- ⑥ Oil Drain
- ⑦ Lifting eyes (optional)
- ⑧ Handles
- ⑨ Skid Bar (Modelnr. SBZ-4) (optional)

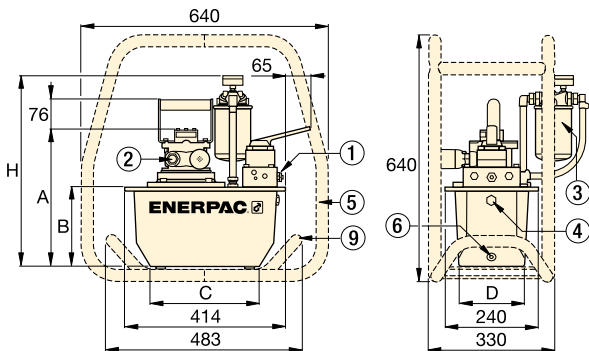


ZA4-Series Pumps with 4 - 6,6 litres reservoir

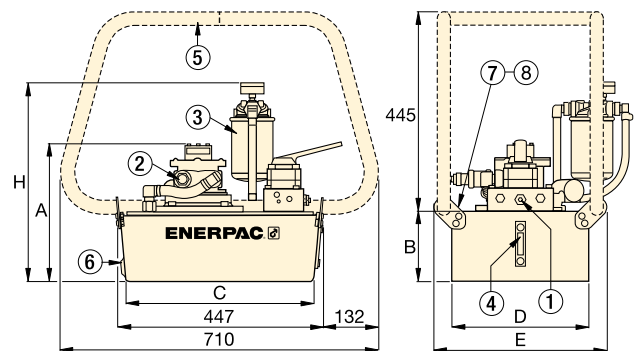

ZA4-Series Pumps with 10, 20 and 40 litres reservoir

| Sound Level (dBA) | Motor Size (kW) | Dimensions (mm) | | | | | | | Model Number |
|----------------------|--------------------|-----------------|-----|-----|-----|-----|-----|------|-----------------|
| | | A | B | C | D | E | H | (kg) | |
| 80 - 95 | 3,0 | 295 | 142 | 279 | 152 | - | 429 | 27 | ZA4004NX |
| 80 - 95 | 3,0 | 295 | 142 | 279 | 152 | - | 429 | 30 | ZA4204MX |
| 80 - 95 | 3,0 | 356 | 203 | 279 | 205 | - | 490 | 34 | ZA4308MX |
| 80 - 95 | 3,0 | 330 | 180 | 414 | 421 | 500 | 467 | 51 | ZA4610MX |
| 80 - 95 | 3,0 | 295 | 142 | 279 | 152 | - | 429 | 31 | ZA4404MX |
| 80 - 95 | 3,0 | 356 | 203 | 279 | 205 | - | 490 | 35 | ZA4408MX |
| 80 - 95 | 3,0 | 305 | 155 | 419 | 305 | 384 | 442 | 40 | ZA4810MX |
| 80 - 95 | 3,0 | 330 | 180 | 414 | 421 | 500 | 467 | 52 | ZA4420MX |
| 80 - 95 | 3,0 | 419 | 269 | 399 | 505 | 584 | 556 | 75 | ZA4440MX |

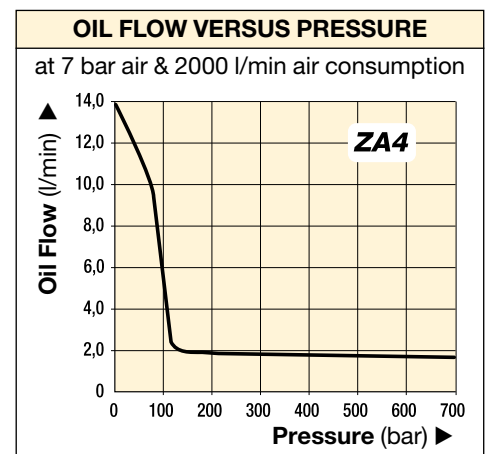

ZG-Series, Gasoline Hydraulic Pumps

▼ Shown from left to right: ZG6440MX-BFCH, ZG5420MX-B



Z Tough,
Dependable,
Innovative
CLASS



Speed Chart

To determine how a specific pump will operate your cylinder, see the Pump-Cylinder Speed Chart in the 'Yellow Pages'.

Page: **273**

- Features Z-Class high efficiency pump design, higher oil flow and bypass pressure
- Two-speed operation reduces cycle time for improved productivity
- User adjustable relief valve built-in on manual valves. Oil ports on valves are 3/8" NPTF
- Available in three 4-cycle engine sizes: 4,1 kW Honda and 4,8 kW and 9,7 kW Briggs & Stratton
- Full sight oil level glass on all reservoirs allow quick and easy oil level monitoring.

ZG6-Series

- Easy serviceable 9,7 kW, 4-cycle gasoline engine with electric start, pressurized oil and 12 Volt charge output for accessories
- Dual forced air heat exchangers stabilizes hydraulic oil temperature
- Sturdy wheeled cart with collapsible handles.



GA45GC Gauge Adaptor Assembly

Protect yourself from system overloading by simply ordering one part number for a pre-assembled gauge, adaptor block and coupler.

Page: **134**



User Adjustable Relief Valve

All VM-Series directional valves have a user adjustable relief valve to allow the operator to easily set the optimum working pressure.

Page: **116**

▼ SELECTION CHART

| Used with Cylinder | Usable Oil Capacity (litres) | Manual Valve ¹⁾ Model Number | Valve Function | Model Number with Roll Cage | Output Flow Rate (l/min) | | | | 4-Cycle Engine Type and Size |
|--------------------|------------------------------|-----------------------------------------|--------------------------|-----------------------------|--------------------------|-----------|------------|------------|------------------------------|
| | | | | | at 7 bar | at 50 bar | at 350 bar | at 700 bar | |
| Single-Acting | 10 | VM33 | Advance / Hold / Retract | ZG5310MX-R | 11,5 | 10,7 | 1,8 | 1,6 | Honda 4,1 kW |
| | 20 | VM33 | Advance / Hold / Retract | ZG5320MX-R | 11,5 | 10,7 | 1,8 | 1,6 | |
| Double-Acting | 10 | VM43 | Advance / Hold / Retract | ZG5410MX-R | 11,5 | 10,7 | 1,8 | 1,6 | |
| | 20 | VM43 | Advance / Hold / Retract | ZG5420MX-R | 11,5 | 10,7 | 1,8 | 1,6 | |
| Single-Acting | 10 | VM33 | Advance / Hold / Retract | ZG5310MX-BR | 6,5 | 6,2 | 1,8 | 1,6 | Briggs & Stratton 4,8 kW |
| | 20 | VM33 | Advance / Hold / Retract | ZG5320MX-BR | 6,5 | 6,2 | 1,8 | 1,6 | |
| Double-Acting | 10 | VM43 | Advance / Hold / Retract | ZG5410MX-BR | 6,5 | 6,2 | 1,8 | 1,6 | |
| | 20 | VM43 | Advance / Hold / Retract | ZG5420MX-BR | 6,5 | 6,2 | 1,8 | 1,6 | |
| | 40 | VM43L | Advance / Hold / Retract | ZG5840MX-BR | 6,5 | 6,2 | 1,8 | 1,6 | |
| Double-Acting | 40 | VM43 | Advance / Hold / Retract | ZG6440MX-BCFH | 14,7 | 14,5 | 3,7 | 3,3 | |
| | 40 | VM43L | Advance / Hold / Retract | ZG6840MX-BCFH | 14,7 | 14,5 | 3,7 | 3,3 | |

¹⁾ See pages 116-117 for hydraulic symbols of these valves.

Gasoline Hydraulic Pumps



ZG-Series, Gasoline Pump Performance

Elevation can affect the performance of any gasoline engine. ZG-Series pumps are designed to develop rated performance at elevations up to 1500 m. For applications above this elevation, please consult your Enerpac office.

Optional: Diesel Engine

ZG-Series pumps can also be equipped with a Diesel Engine. Contact Enerpac for details.

ZG Series



Reservoir Capacity:

10 - 20 - 40 litres

Flow at Rated Pressure:


1,6 - 3,3 l/min

Engine Size:

4,1 - 4,8 - 9,7 kW


Maximum Operating Pressure:

700 bar

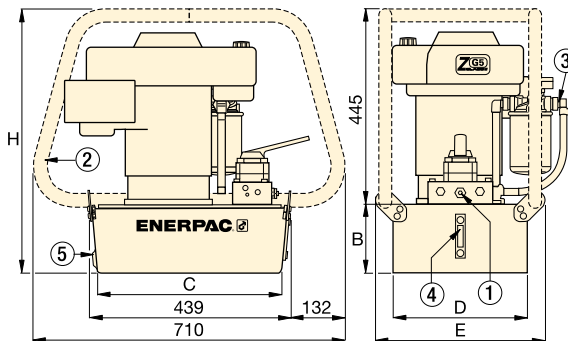

- ① User adjustable relief valve on all manual valves. 3/8" NPTF on A and B ports; 1/4" NPTF on auxiliary ports.
- ② Roll Bar
- ③ Return Line Filter
- ④ Oil Level Gauge
- ⑤ Oil Drain

ZG5-Series

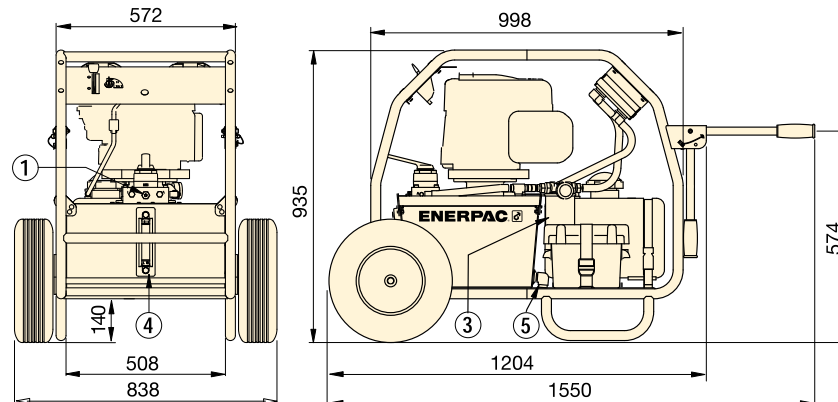

ZG6-Series



High Pressure Hoses

Enerpac offers a complete line of high quality hydraulic hoses. To ensure the integrity of your system, specify only genuine Enerpac hydraulic hoses.

Page: 122




Speed Chart

To determine how a specific pump will operate your cylinder, see the Pump-Cylinder Speed Chart in the 'Yellow Pages'.

Page: 273

| Relief Valve Adjustment Range (bar) | Sound Level (dBA) | Dimensions (mm) | | | | | Model Number with Roll Cage (kg) | |
|-------------------------------------|-------------------|-----------------|-----|-----|-----|-----|----------------------------------|---------------|
| | | B | C | D | E | H | | |
| 70 - 700 | 88 - 93 | 155 | 419 | 305 | 384 | 600 | 52 | ZG5310MX-R |
| | | 180 | 414 | 421 | 500 | 625 | 64 | ZG5320MX-R |
| | | 155 | 419 | 305 | 384 | 600 | 52 | ZG5410MX-R |
| | | 180 | 414 | 421 | 500 | 625 | 64 | ZG5420MX-R |
| 70 - 700 | 88 - 93 | 155 | 419 | 305 | 384 | 600 | 50 | ZG5310MX-BR |
| | | 180 | 414 | 421 | 500 | 625 | 63 | ZG5320MX-BR |
| | | 155 | 419 | 305 | 384 | 600 | 50 | ZG5410MX-BR |
| | | 180 | 414 | 421 | 500 | 625 | 63 | ZG5420MX-BR |
| | | 269 | 399 | 505 | 557 | 714 | 86 | ZG5840MX-BR |
| 70 - 700 | 88 - 93 | - | - | - | - | - | 152 | ZG6440MX-BCFH |
| | | - | - | - | - | - | 155 | ZG6840MX-BCFH |

OIL FLOW VERSUS PRESSURE

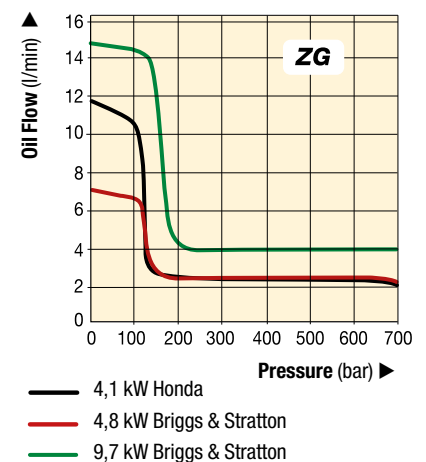

Enerpac hydraulic valves are available in a wide variety of models and configurations.

Whatever your requirements... directional control, flow control, or pressure control... you can be sure that Enerpac has the correct valve to match your application exactly.

Designed and manufactured for safe operation up to 700 bar, the range of Enerpac valves allows for direct pump mounting, remote mounting, manual or solenoid actuation, and in-line installation, giving you flexible solutions to control your hydraulic system.



Assisted Return Pumps

To improve productivity and plunger retraction, Enerpac offers valve configurations designed to accelerate your cylinder retraction speeds.

ZU4 and ZE-Series pumps feature **Venturi Valve Technology** to facilitate the faster return of single-acting gravity and spring return cylinders.



Pressure & Flow Control Valves

For more hydraulic system control with pressure relief valves, shut-off valves, check valves and sequence valves see our "System Components".

Page: 136



Valving Help


See Basic System Set-Up and Valve Information in our 'Yellow Pages'.

Page: 274



Directional Control Valves Section Overview

| Valve Type | Series | Page |
|-------------------------------------------------------------|----------------|-------|
| Pump Mounted Manual and Solenoid Directional Control Valves | VM VE | 116 ▶ |
| Remote Mounted Manual Directional Control Valves | VC | 118 ▶ |
| Valve Dimensions | VM VE VC | 119 ▶ |

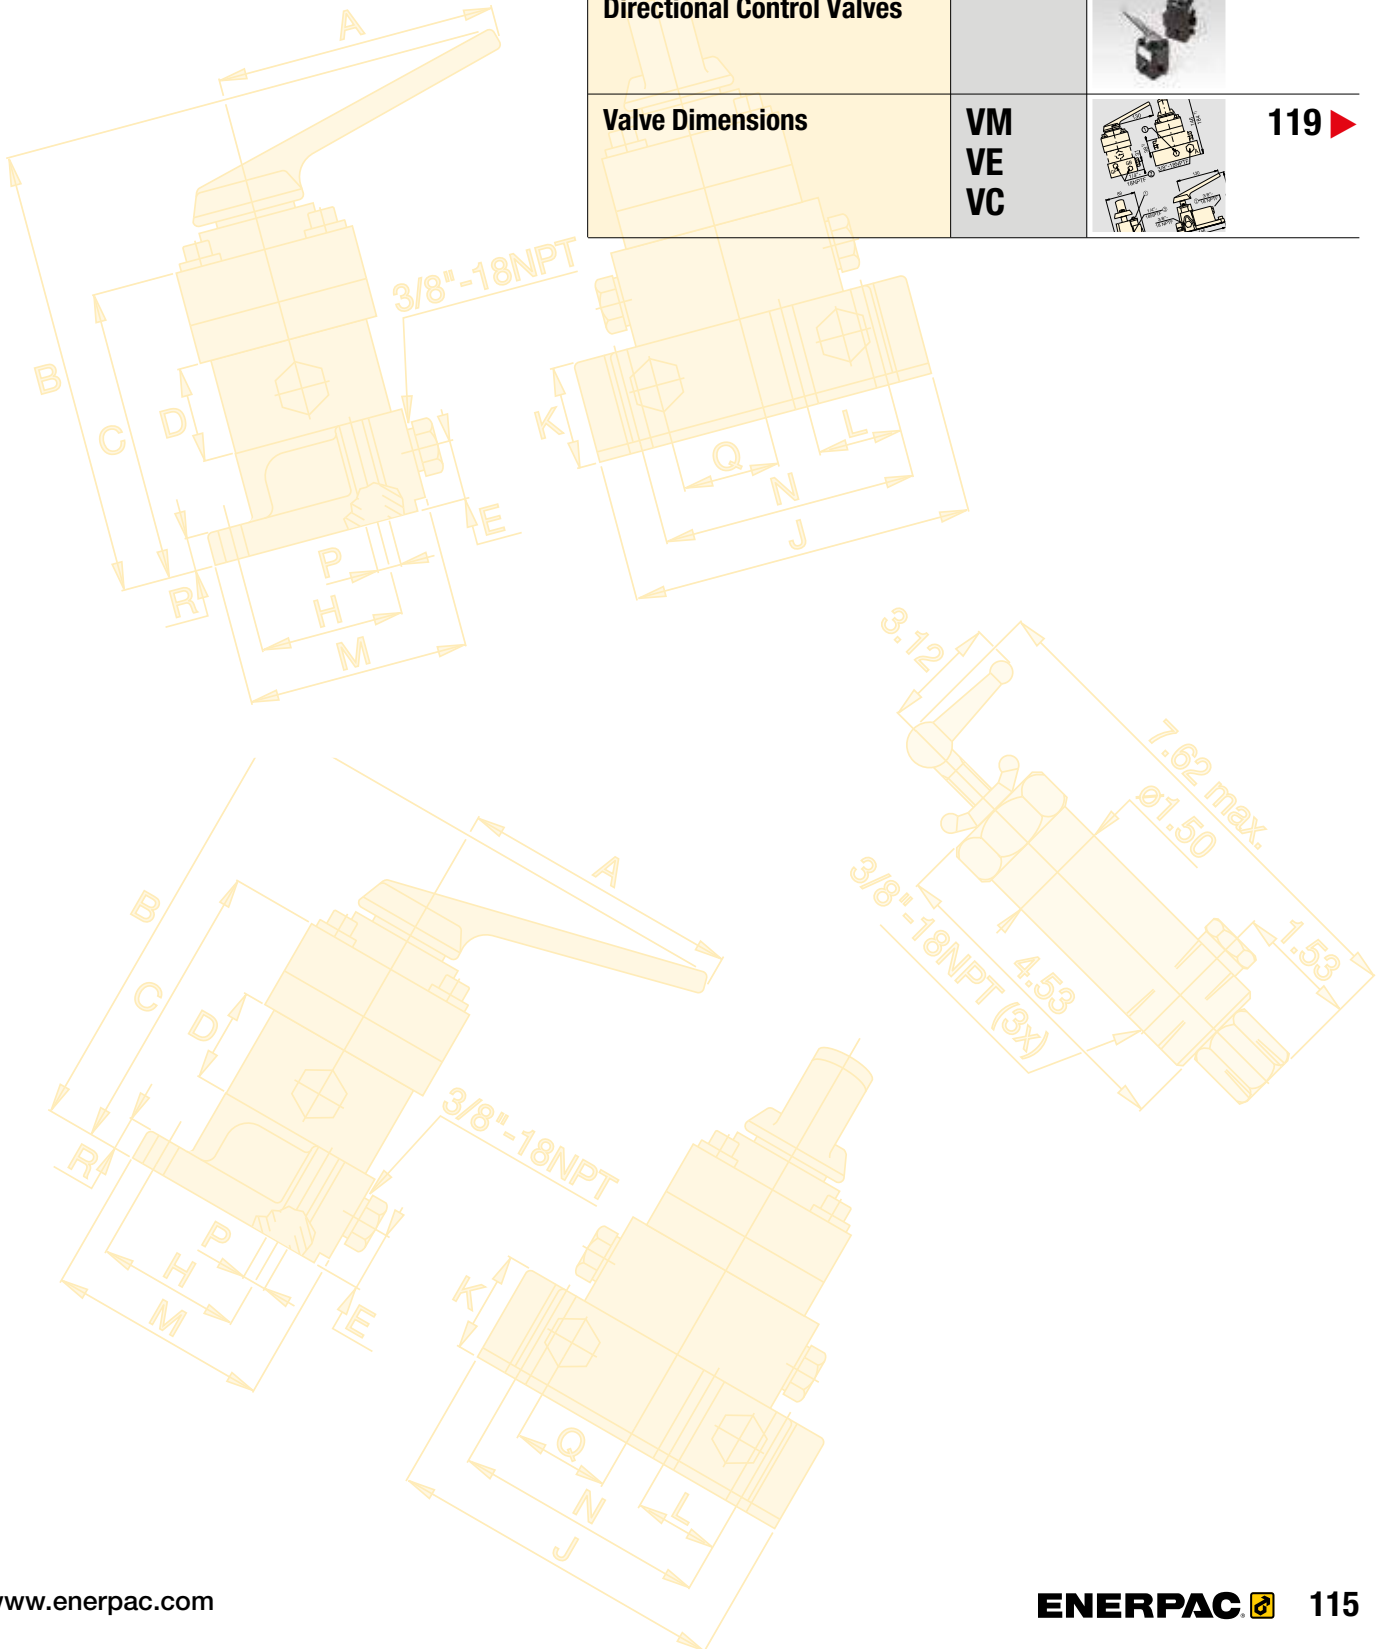

▼ Shown from left to right: VM32, VE33, VM33, VM43L, VE43



- Advance/Retract and Advance/Hold/Retract operation of single- and double-acting cylinders and tools
- Manual or solenoid operation
- Pump mounting will retrofit on most Enerpac pumps
- Available “locking” option on VM-Series valves for load-holding applications
- Standard “locking” feature on VE-Series 3-position valves
- User adjustable relief valve allows the operator to easily set the working pressure.

Venturi Valve Technology

- For fast return of single-acting gravity and spring return cylinders
- Available as manual or solenoid valve on ZU4- and ZE-Series electric pumps
- Retrofit Venturi valve kits for field installation on existing ZU4- and ZE-Series electric pumps.



Adjustable relief valve

All valves feature several gauge ports for “system”, A port and B port pressure monitoring. User adjustable relief valves are included on all models to allow the operator to easily set the optimum working pressure for each application.

VM33 and VE43 valves include “System Check” feature, for more precise pressure holding and improved system control.

The VM33 has improved porting which provides faster cylinder retraction while motor is running.

Locking Valves

For applications that require positive load holding, VM-Series valves (except VM22 and VM32) are available with a pilot-operated check valve. This option provides hydraulic locking of the load until the valve is shifted into the retract position.

Reliable Control of Single and Double-Acting Cylinders and Tools

| Valve Operation | Used with Cylinder | Valve Type | |
|-----------------|--------------------|---------------------------------------------------------|--|
| Manual | Single-acting | 3-Way, 2-Position | |
| Manual | Single-acting | 3-Way, 2-Position | |
| Manual | Single-acting | 3-Way, 3-Position, Tandem Center | |
| Manual | Single-acting | 3-Way, 3-Position, Tandem Center, Venturi Return Assist | |
| Manual | Double-acting | 4-Way, 3-Position, Tandem Center | |
| Manual | Single-acting | 3-Way, 3-Position, Tandem Center, Locking | |
| Manual | Double-acting | 4-Way, 3-Position, Tandem Center, Locking | |
| Solenoid 24 VDC | Single-acting | 3-Way, 2-Position | |
| Solenoid 24 VDC | Single-acting | 3-Way, 2-Position, Dump | |
| Solenoid 24 VDC | Single-acting | 3-Way, 3-Position, Tandem Center, Venturi Return Assist | |
| Solenoid 24 VDC | Single-acting | 3-Way, 3-Position, Tandem Center | |
| Solenoid 24 VDC | Double-acting | 4-Way, 3-Position, Tandem Center | |

For remote valve information, see page 118.
See page 119 for valve dimensions.

Pump Mounted Directional Control Valves

VM VE Series



Maximum Flow Capacity:

17 l/min

Maximum Operating Pressure:

700 bar

| Model Number | Hydraulic Symbol | Schematic Flowpath | | | ⚖️ (kg) |
|---------------------|------------------|--------------------|---------|---------|------------|
| | | Advance | Neutral | Retract | |
| VM22 | | | | | 2,5 |
| VM32 | | | | | 2,5 |
| VM33 | | | | | 3,0 |
| VM33VAC | | | | | 3,5 |
| VM43 | | | | | 3,1 |
| VM33L | | | | | 4,8 |
| VM43L | | | | | 4,9 |
| VE32 ¹⁾ | | | | | 3,9 |
| VE32D ¹⁾ | | | | | 3,9 |
| VE33VAC | | | | | 10,0 |
| VE33 ¹⁾ | | | | | 9,3 |
| VE43 ¹⁾ | | | | | 9,3 |

¹⁾ When ordering Enerpac VE-Series solenoid valves, the pendant must be ordered separately for Z-Class. See page 101 for pendant ordering details.



Assisted Return Pumps with Venturi Valve Technology

To improve productivity and plunger retraction, Enerpac offers valve configurations designed to

accelerate your cylinder retraction speeds, ZU4 and ZE-Series pumps feature **Venturi Valve Technology** to facilitate the faster return of single-acting gravity and spring return cylinders.

See valve type in ZU4 and ZE-pump ordering matrix on pages 97 and 103.

Venturi Valve Retrofit Kits

For field installation on existing ZU4, ZE and ZA-Series pumps, Retrofit Kits are available for manual and solenoid operated valves.

| For valve model | For valve operation | Retrofit Kit Model Nr. |
|-----------------|---------------------|------------------------|
| VM33, VM33L | Manual | VM33RVK |
| VE33 | Solenoid | VUV5 |



Spring Centred Valve Kits

VM and VC-Series manual 3-position valves can be easily converted into spring centred valves. With these retro-fit kits the

handle will automatically move into the neutral valve position when released.

| For valve model | Model Number |
|--------------------------|------------------|
| VM33, VM43 | VMC3343K |
| VM33L, VM43L | VMC3343KL |
| VC3, VC15, VC4, VC20 | VMC34K |
| VC3L, VC15L, VC4L, VC20L | VMC34KL |

▼ Shown from left to right: VC-20, VC-4L



Remote Control of Single and Double-Acting Cylinders and Tools



Locking Valves


For applications that require positive load holding, VC-Series valves are available with a pilot-operated check valve. This option provides hydraulic locking of the load until the valve is shifted into the retract position.

- Advance/Hold/Retract operation for use with single-acting or double-acting cylinders and tools
- Return line kit included with remote valves.

| Valve Operation | Used with Cylinder | Valve Type | Model Number | Hydraulic Symbol | Schematic Flowpath | | | Weight (kg) |
|-----------------|--------------------|-------------------------------------------|---------------|------------------|--------------------|------|---------|-------------|
| | | | | | Advance | Hold | Retract | |
| Manual | Single-Acting | 3-Way, 3-Position, Tandem Center | VC-3 | | | | | 2,9 |
| Manual | Single-Acting | 3-Way, 3-Position, Tandem Center, Locking | VC-3L | | | | | 4,7 |
| Manual | Single-Acting | 3-Way, 3-Position, Closed Center | VC-15 | | | | | 2,9 |
| Manual | Single-Acting | 3-Way, 3-Position, Closed Center, Locking | VC-15L | | | | | 4,7 |
| Manual | Double-Acting | 4-Way, 3-Position, Tandem Center | VC-4 | | | | | 2,9 |
| Manual | Double-Acting | 4-Way, 3-Position, Tandem Center, Locking | VC-4L | | | | | 4,7 |
| Manual | Double-Acting | 4-Way, 3-Position, Closed Center | VC-20 | | | | | 2,9 |
| Manual | Double-Acting | 4-Way, 3-Position, Closed Center, Locking | VC-20L | | | | | 4,7 |

Directional Control Valves Dimensions


Pump Mounted Directional Control Valves

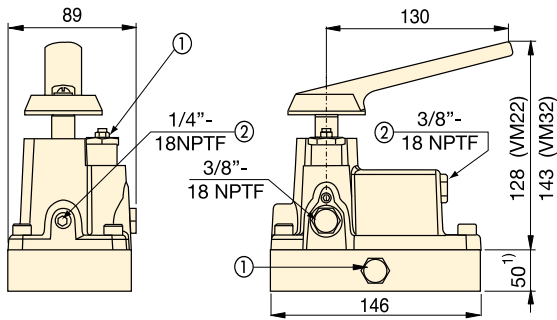

VM22, VM32


¹⁾ VM22 only

- ① User Adjustable Relief Valve
- ② Auxiliary Port

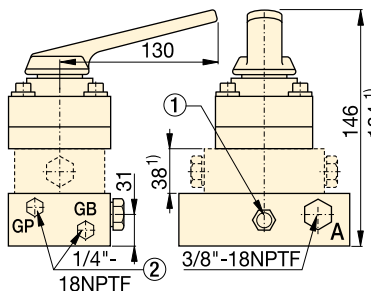


VM33, VM33L, VM33VAC, VM43, VM43L

¹⁾ VM33VAC, VM33L and VM43L only

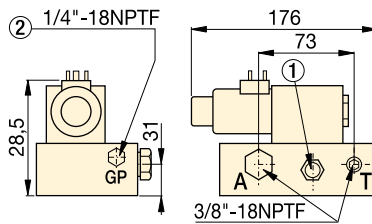


VE32D

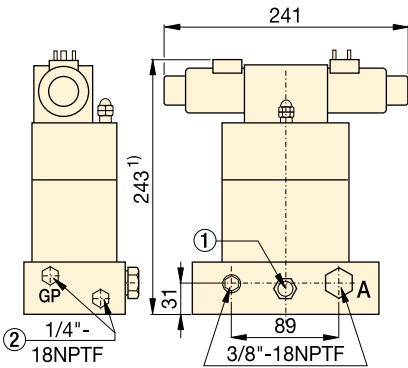


VE33, VE33VAC

¹⁾ VE33VAC is 38 mm higher: 281 mm

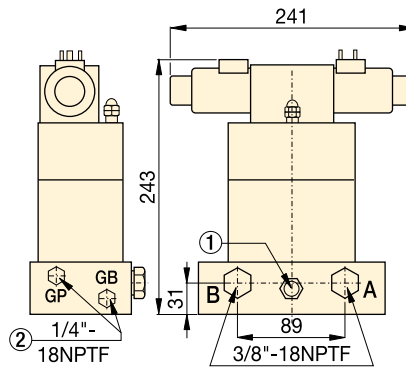

VE43

Remote Manual Directional Control Valves

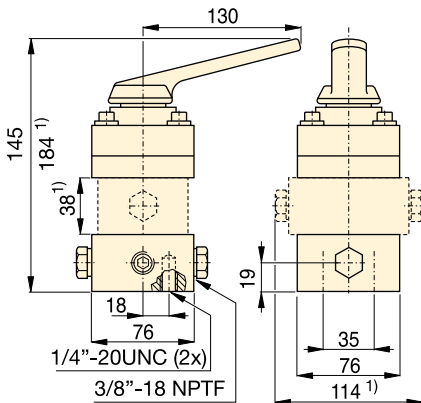

VC-3, VC-3L, VC-15, VC-15L

VC-4, VC-4L, VC-20, VC-20L

¹⁾ VC-3L, VC-15L, VC-4L and VC-20L only

VM VE VC Series



Maximum Flow Capacity:

17 l/min

Maximum Operating Pressure:

700 bar



Spring Centred Valve Kits

VM and VC-Series manual 3-position valves can be easily converted into spring centred valves. With these retro-fit kits the handle will automatically move into the neutral valve position when released.

| For valve model | Model Number |
|--------------------------|------------------|
| VM33, VM43 | VMC3343K |
| VM33L, VM43L | VMC3343KL |
| VC3, VC15, VC4, VC20 | VMC34K |
| VC3L, VC15L, VC4L, VC20L | VMC34KL |



Gauges

Minimize the risk of overloading and ensure long, dependable service from your equipment. Refer to the System Components Section for a full range of gauges.

Page: **130**



Fittings

For additional fittings see the fitting page of the System Components section in this catalogue.

Page: **127**



Valving Help

See Basic System Set-Up and Valve Information in our 'Yellow Pages'.

Page: **274**

Enerpac System Components:

All the additional elements you need to complete your high pressure hydraulic system and get started.

Engineered to work with your Enerpac cylinders, pumps and tools, all Enerpac components are designed to the most exacting standards.

With this complete line of hydraulic hoses, couplers, fittings, manifolds, oil and gauges, Enerpac has the accessories to complement your system and ensure the efficient operation, long life and safety of your hydraulic equipment.



Yellow Pages

For sample system set-ups and how to correctly specify your system components, please view the Enerpac "Yellow Pages" section in this catalogue.

Page:  263












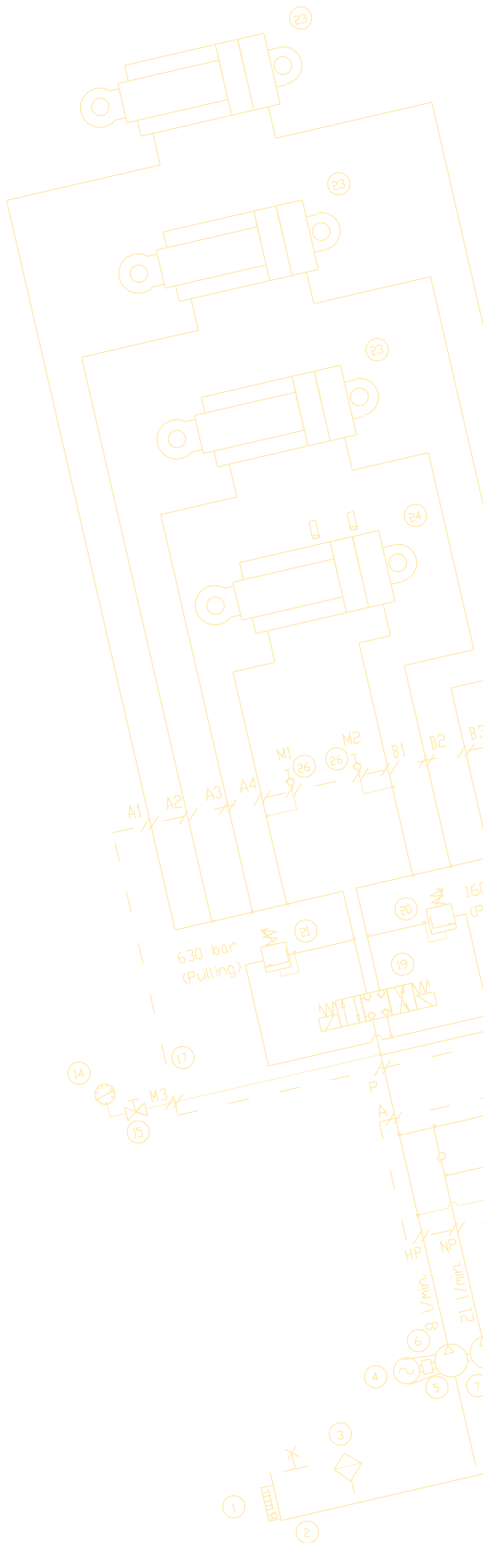





Maintain System Integrity

Use Enerpac System Components, designed to interface with Enerpac cylinders, pumps and tools to ensure your system operates at peak performance.



System Components & Control Valves Overview



| Component Type | Series | | Page |
|-------------------------------------------------------------------|-------------|---------------------------------------------------------------------------------------|-------|
| Hoses | H700 |  | 122 ▶ |
| Couplers | A, C, F, T |  | 124 ▶ |
| Hydraulic Oil | HF |  | 126 ▶ |
| Manifolds | A |  | 126 ▶ |
| Control Manifolds | AM |  | 126 ▶ |
| Fittings | BFZ, FZ XSC |  | 127 ▶ |
| Force Gauges Pressure Gauges | GF GP |  | 128 ▶ |
| Pressure Gauges, glycerine filled Pressure Gauges, dry | G H |  | 132 ▶ |
| Test System Gauges | T |  | 132 ▶ |
| Digital Pressure Gauges | DGR |  | 133 ▶ |
| Gauge Adaptor Assembly | GA45 |  | 134 ▶ |
| 4 Way manifold assembly with gauges | AMGC |  | 134 ▶ |
| Gauge Accessories | GA NV, V |  | 135 ▶ |
| Pressure and Flow Control Valves | V |  | 136 ▶ |

H700-Series, High Pressure Hoses

▼ Shown: HC-7206



Thermo-Plastic Safety Hoses (700-Series)

- For demanding applications, featuring a 4:1 safety factor
- Maximum working pressure of 700 bar
- Outside jacket is polyurethane, to provide maximum abrasion resistance
- Exhibits low volumetric expansion under pressure to enhance overall system efficiency
- Crimped-on rubber strain relief for improved life and durability on all models.

▼ To prevent back pressure and to increase cylinder retraction speed, when using long hoses with single-acting cylinders, the Enerpac HC-7300-Series of hoses with increased internal diameter is the best choice.



Safety and Quality



To ensure the integrity of your system, specify only Enerpac hydraulic hoses.

WARNING !

- Do not exceed 700 bar maximum pressure.
- Do not handle hoses which are under pressure.

More safety instructions in our 'Yellow pages'.

Page: **264**

▼ Hose End Couplings

| | |
|-----------|---------------------------------------------------------------------------------------|
| 1/4" NPTF |  |
| 3/8" NPTF |  |
| A-604 |  |
| A-630 |  |
| AH-604 |  |
| AH-630 |  |
| C-604 |  |
| CH-604 |  |



Hose Oil Capacity

When using greater hose lengths, it is sometimes necessary to fill the pump reservoir after filling the hoses.

To determine the hose oil capacity, use the following:

For 6,4 mm inside diameter hoses:

Capacity (cm³) = 32,1699 x Length (m)

For 9,7 mm inside diameter hoses:

Capacity (cm³) = 73,8981 x Length (m)

| Internal Diameter (mm) | Hose End Assemblies and Couplers * | | Hose Length (m) | Model Number | Weight (kg) | |
|---------------------------|------------------------------------|-----------|--------------------|--------------|----------------|---------|
| | End one | End two | | | | |
| 6,4 | 1/4" NPTF | | - | - | - | |
| | | | - | - | - | |
| | | A-630 | 1,8 | HB-7206QB | 1,1 | |
| | | CH-604 | 1,8 | HC-7206Q | 1,0 | |
| | 3/8" NPTF | | | 0,6 | H-7202 | 0,5 |
| | | | | 0,9 | H-7203 | 0,7 |
| | | | | 1,8 | H-7206 | 0,9 |
| | | | | 3,0 | H-7210 | 1,4 |
| | | | | 6,1 | H-7220 | 2,8 |
| | | | | 9,1 | H-7230 | 4,5 |
| | | | | 15 | H-7250 | 7,0 |
| | | | | - | - | - |
| | | A-604 | 1,8 | HA-7206B | 1,1 | |
| | | | - | - | - | |
| | | | - | - | - | |
| | | 3/8" NPTF | AH-604 | | 1,8 | HA-7206 |
| | | | | 3,0 | HA-7210 | 1,5 |
| | AH-630 | | | 1,8 | HB-7206 | 1,0 |
| | C-604 | | | 0,9 | HC-7203B | 1,0 |
| | | | | 1,8 | HC-7206B | 1,3 |
| CH-604 | | | 3,0 | HC-7210B | 1,8 | |
| | | 0,9 | HC-7203 | 0,8 | | |
| | | 1,8 | HC-7206 | 1,0 | | |
| | | 3,0 | HC-7210 | 1,5 | | |
| CH-604 | CH-604 | | 6,1 | HC-7220 | 2,9 | |
| | | | 1,8 | HC-7206C | 1,1 | |
| | | 15 | HC-7250C | 7,0 | | |
| | | 1,8 | H-7306 | 1,6 | | |
| 9,7 | 3/8" NPTF | | - | - | - | |
| | | | | 3,0 | H-7310 | 2,4 |
| | | | | 6,1 | H-7320 | 4,5 |
| | | | | 9,1 | H-7330 | 7,3 |
| | | | 15 | H-7350 | 11,5 | |
| | | CH-604 | | 1,8 | HC-7306 | 1,7 |
| | | | | 3,0 | HC-7310 | 2,5 |
| | | | | 6,1 | HC-7320 | 5,1 |

* For technical information on couplers see next page.

H700 Series



Inside Diameter:

6,4 - 9,7 mm

Length:

0,6-15 m

Maximum Operating Pressure:

700 bar



GA45GC Gauge Adaptor

Protect yourself from system overloading by simply ordering one part number for a pre-assembled gauge, adaptor block and coupler.

Page: 134



Torque Wrench Hoses

Use Enerpac twin safety hoses with double-acting wrenches to ensure the integrity of your hydraulic system.

Page: 212



Fittings

For additional fittings see the fitting page of the System Components section.

Page: 127



Premium Hydraulic Oil

Use only genuine Enerpac hydraulic oil. Wrong fluid can destroy seals and pump and will render your warranty null and void your guarantee.

Page: 126

▼ Shown: FH-604, FR-400, AR-630, C-604, AH-604, AR-400



3/8" High Flow Couplers

- Standard equipment on most Enerpac cylinders
- Recommended for use on all Enerpac pumps and cylinders where space and porting permits
- Includes "2-in-1" dust cap for use on male and female couplers

3/8" High Pressure 'Flush-face' Couplers

- Featuring "Push-to-connect" operation, to guarantee good connection every time
- Flush-face, zero-leak operation for minimal spillage and reduced pressure drop
- HTMA* recognized for safety and performance
- Will not interchange with low pressure couplers

3/8" Regular Spee-D-Couplers®

- For medium duty applications with hand pumps
- Includes female aluminium dust cap

1/4" Regular Couplers

- For use with small cylinders and hand pumps
- Includes female aluminium dust cap

1/4" Spin-on Torque Wrench Couplers


- For use with 700 bar S and W-Series torque wrenches, THQ-Series hoses and 700 bar torque wrench pumps

1/4" Lock-ring Torque Wrench Couplers

- For use with 800 bar HXD and SQD-Series torque wrenches, THC-Series hoses and 800 bar torque wrench pumps.

* Hydraulic Tool Manufacturers Association.

Quick Connection of Hydraulic Lines



Thread sealer

To seal NPTF threads use one of the new anaerobic thread sealers or Teflon paste. When using Teflon Tape, apply the tape one thread from the end of a fitting to prevent it from winding up in the hydraulic system.



WARNING!

Couplers should be pressurized only when completely connected and should not be coupled or uncoupled when pressurized.

More safety instructions in our 'Yellow Pages'.

Page: 264



F-Series

Flush-faced couplers provide reduced pressure drop versus other types and are preferred in dirty, grimy construction and mining environments due to easy clean, non-dirt trapping faces.

▼ With the use of Enerpac high flow couplers, hoses are easily installed for multiple hydraulic line connections in this 34 points PLC-controlled lifting system.



Hydraulic Couplers



CT-604 Safety Tool

Use the Enerpac CT-604 to relieve hydraulic back pressure by safely bleeding the hydraulic coupler.

Minimize injuries from projectile parts and under-skin hydraulic fluid injections by eliminating unsafe coupler bleeding practices. The CT-604 is Enerpac-engineering safe for use at 700 bar.

NOTE: For use on C-Series 700 bar High-Flow Couplers only


A, C, F, T Series



Maximum Flow Capacity:
6,1 - 40,0 l/min

Thread:
1/4" - 3/8" NPTF

Maximum Operating Pressure:
700 - 800 bar

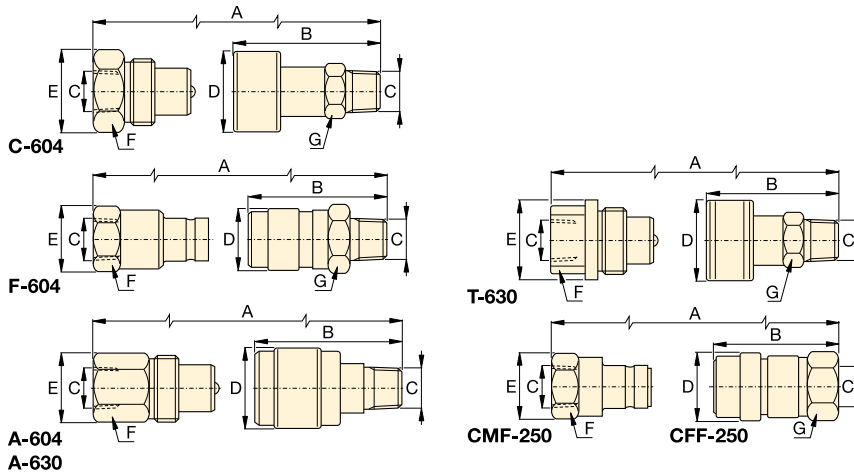

Metal Dust Caps

Steel dust caps are available for the C-604 series couplers.

Order model number:

CD-411M for female half

CD-415M for male half

| Maximum Flow Capacity (l/min) | Coupler Type | Model Numbers | | | Dimensions (mm) | | | | | | | Dust Cap(s) Modelnr. |
|-------------------------------|-------------------------------------|---------------|-------------|-----------|-----------------|----|-----------|----|----|----|----|----------------------|
| | | Complete Set | Female Half | Male Half | A* | B | C | D | E | F | G | |
| 35 | 700 bar High-Flow Coupler | C-604 | CR-400 | CH-604 | 83 | 64 | 3/8" NPTF | 35 | 36 | 32 | 25 | (2x) CD-411 |
| 40 | 700 bar Flush-Face coupler | F-604 | FR-400 | FH-604 | 111 | 72 | 3/8" NPTF | 31 | 31 | 27 | 29 | - |
| 7,6 | 700 bar Regular Spee-D-Coupler® | A-604 | AR-400 | AH-604 | 77 | 42 | 3/8" NPTF | 28 | 26 | 23 | 19 | Z-410 female only |
| 7,6 | 700 bar Regular Coupler | A-630 | AR-630 | AH-630 | 66 | 35 | 1/4" NPTF | 22 | 20 | 19 | 15 | Z-640 female only |
| 11,4 | 700 bar Spin-on Coupler | T-630 | TR-630 | TH-630 | 73 | 60 | 1/4" NPTF | 29 | 29 | 19 | 21 | - |
| 6,1 | 800 bar Lock-ring Coupler | - | CFF-250 | CMF-250 | 76 | 58 | 1/4" NPTF | 23 | 28 | 24 | 22 | - |

* Value A is total length when male and female half are connected.

▼ Shown: HF-95T, HF-95X, HF-95Y



The Genuine Range

Hydraulic Oil

| Contents | Model Number | Use only genuine Enerpac Hydraulic Oil. The use of any other fluid will render your Enerpac warranty null and void. |
|-----------|---------------|---------------------------------------------------------------------------------------------------------------------|
| 1 litre | HF-95X | |
| 5 litres | HF-95Y | |
| 20 litres | HF-95T | |

▼ OIL SPECIFICATION CHART

| | |
|---------------------------|-----------|
| Viscosity Index | 100 min |
| Viscosity (cSt @ 40 °C) | 32 |
| API Gravity | 31-33 |
| Density (cSt @ 15 °C) | 875 |
| Flash point | 204 °C |
| Pour point | -32 °C |
| Colour | Blue |
| Working Temperature Range | 0 - 60 °C |
| Ideal working temperature | 40 °C |

- Maximum pump volumetric efficiency
- Maximum internal heat transfer
- Prevents pump cavitation
- Additives prevent rust, oxidation and sludge
- High viscosity index
- Maximum film protective lubricity.

Manifolds


| Description | Model Number | Dimensions (mm) |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------|-----------------|
| 7-port Manifold, short | A-64 | |
| 7-port Manifold, long allows direct mounting of control valves to the manifold. | A-65 | |
| 6-port Manifold, hexagon Plugs furnished for all ports 3/8"-18 NPTF. | A-66 | |
| Control Manifolds For control of two or four single-acting cylinders simultaneously. AM-21 with 5 ports 3/8"NPTF. AM-41 with 7 ports 3/8"NPTF. | AM-21 AM-41 | |

Hydraulic Oil, Manifolds and Fittings



3/8" Swivel Connector

360 degree swivel coupler for optimal orientation of the hydraulic connection on cylinders, pumps and hoses.
Order Model Number. **XSC-1**



**A, AM
BFZ
FZ
HF
Series**



| 700 bar Fittings | | Model Number | Dimensions (mm) | | C | D | Diagram | |
|---------------------------|----------------------|--------------|------------------|----|----|--------------|--------------|--|
| | | | A | B | | | | |
| Street Elbow | | | FZ-1616 | 23 | 33 | 3/8"-18 NPTF | 3/8"-18 NPTF | |
| From: 3/8"-NPTF Male | To: 3/8"-NPTF Female | | | | | | | |
| Reducing Connector | | | FZ-1615 | 28 | 25 | 3/8"-18 NPTF | 1/4"-18 NPTF | |
| From: 3/8"-NPTF Female | To: 1/4"-NPTF Female | | | | | | | |
| | | | FZ-1625 | 47 | 29 | 1/2"-14 NPTF | 3/8"-18 NPTF | |
| From: 1/2"-NPTF Female | To: 3/8"-NPTF Female | | | | | | | |
| Hexagon Nipple | | | FZ-1608 | 38 | 16 | 1/4"-18 NPTF | 1/4"-18 NPTF | |
| From: 1/4"-NPTF | To: 1/4"-NPTF | | | | | | | |
| From: 3/8"-NPTF | To: 3/8"-NPTF | | | | | | | |
| From: 3/8"-NPTF | To: 3/8"-NPTF | | | | | | | |
| Coupling | | | FZ-1614 | 29 | 23 | 3/8"-18 NPTF | 3/8"-18 NPTF | |
| From: 3/8"-NPTF | To: 3/8"-NPTF | | | | | | | |
| | | | FZ-1605 | 29 | 19 | 1/4"-18 NPTF | 1/4"-18 NPTF | |
| From: 1/4"-NPTF | To: 1/4"-NPTF | | | | | | | |
| Cross | | | FZ-1613 | 45 | 25 | 3/8"-18 NPTF | - | |
| From: 3/8"-NPTF Female | To: 3/8"-NPTF Female | | | | | | | |
| Tee | | | FZ-1612 | 45 | 25 | 3/8"-18 NPTF | - | |
| From: 3/8"-NPTF | To: 3/8"-NPTF | | | | | | | |
| From: 1/4"-NPTF | To: 1/4"-NPTF | | | | | | | |
| | | | FZ-1637 | 45 | 24 | 1/4"-18 NPTF | - | |
| From: 1/4"-NPTF | To: 1/4"-NPTF | | | | | | | |
| Street Tee | | | BFZ-16312 | 56 | 26 | 3/8"-18 NPTF | 3/8"-18 NPTF | |
| From: 3/8"-NPTF Female | To: 3/8"-NPTF Male | | | | | | | |
| Elbow | | | FZ-1610 | 33 | 20 | 3/8"-18 NPTF | - | |
| From: 3/8"-NPTF | To: 3/8"-NPTF | | | | | | | |
| | | | FZ-1638 | 36 | 24 | 1/4"-18 NPTF | - | |
| From: 1/4"-NPTF | To: 1/4"-NPTF | | | | | | | |
| Reducer | | | FZ-1630 | 19 | 19 | 1/4"-18 NPTF | 3/8"-18 NPTF | |
| From: 3/8"-NPTF | To: 1/4"-NPTF | | | | | | | |
| From: 1/4"-NPTF | To: 1/2"-NPTF | | | | | | | |
| | | | BFZ-1630 | 28 | 22 | 1/4"-18 NPTF | 1/2"-14 NPTF | |
| From: 3/8"-NPTF | To: G1/4" | | | | | | | |
| | | | BFZ-16301 | 19 | 19 | G1/4" | 3/8"-18 NPTF | |
| From: 3/8"-NPTF | To: G1/4" | | | | | | | |
| Adaptor | | | BFZ-16411 | 35 | 19 | 1/4"-18 NPTF | G1/4" | |
| From: G1/4" | To: 1/4"-NPTF | | | | | | | |
| From: G1/4" | To: 1/8"-NPTF | | | | | | | |
| From: G3/8" | To: 1/4"-NPTF | | | | | | | |
| | | | BFZ-16421 | 31 | 19 | 1/8"-27 NPTF | G1/4" | |
| From: G3/8" | To: 1/4"-NPTF | | | | | | | |
| | | | BFZ-16323 | 43 | 24 | 1/4"-18 NPTF | G3/8" | |
| From: G3/8" | To: 3/8"-NPTF | | | | | | | |
| | | | BFZ-16324 | 43 | 24 | 3/8"-18 NPTF | G3/8" | |
| From: G3/8" | To: 3/8"-NPTF | | | | | | | |
| Adaptor | | | FZ-1055 | 44 | 23 | 1/4"-18 NPTF | 3/8"-18 NPTF | |
| From: 1/4"-NPTF | To: 3/8"-NPTF | | | | | | | |
| From: 1/4"-NPTF | To: 1/8"-NPTF | | | | | | | |
| | | | FZ-1642 | 30 | 19 | 1/8"-27 NPTF | 1/4"-18 NPTF | |
| From: 1/4"-NPTF | To: 1/8"-NPTF | | | | | | | |
| | | | FZ-1634 | 42 | 28 | 3/8"-18 NPTF | 1/2"-18 NPTF | |
| From: 1/2"-NPTF | To: 3/8"-NPTF | | | | | | | |
| Swivel Fitting | | | FZ-1660 | 40 | 22 | 3/8"-18 NPTF | 3/8"-18 NPTF | |
| From: 3/8"-NPTF Male | To: 3/8"-NPTF Female | | | | | | | |

▼ Shown from left to right: GF-230B, GF-835B, GP-10S




- **GF-series gauges:** calibrated with dual scale reading for pressure (bar) and force (kN)
- **GF-series gauges:** all pressure sensing parts are sealed and dampened by glycerine for long life
- **GP-series gauges:** calibrated with dual scale reading for pressure in bar and psi
- **Excellent readability:** gauge face dimensions 100 mm
- **Fast, easy installation**
- **Stainless steel gauge cases for corrosion resistance.**

▼ A GP-10S gauge is used on this press to check the hydraulic pressure required to bend flat steel bar.



Visual Reference for System Pressure and Force



Auto-Damper Valve V-10

For automatic control of gauge fluctuations, the V-10 Auto-Damper Valve controls the movement of the gauge needle

by restricting oil flow in and out of the gauge. No adjustments needed.

Page: 136



Snubber Valve V-91

Infinitely adjustable for metering oil out of a gauge. The V-91 Snubber Valve is also suitable as a shut-off valve to protect the gauge during

high cycle applications.

Page: 136

| Used With | |
|--------------------------|---------------------------------|
| | All cylinders |
| | All cylinders |
| | 5 ton RC, RSM-cylinders |
| | 10 ton RC, RCS, RSM-cylinders |
| | All 25 ton RC-cylinders |
| | All 50 ton RC, RR-cylinders |
| | 13 ton RCH-Series |
| | RCS-201, 302 |
| | RCS-502, 1002 |
| | RCH-202, 302, 603 |
| | 25, 30, 50 ton RC, RCS, RSM, RR |
| | 75 and 95 ton RC, RR-cylinders |
| | 150 and 200 ton RR-cylinders |
| | 10 ton VLP Presses |
| | 25 ton XLP Presses |
| | 50 ton XLP, BPR Presses |
| 100 ton VLP, BPR Presses | |
| 200 ton VLP, BPR Presses | |

Hydraulic Force & Pressure Gauges



Maximum Indicator Pointer

Indicator retains peak readings of pressure or force generated by the system.

Can easily be installed on GP and H-Series gauges.
Order model nr: **BSA-881**.



Pressure Gauges

To measure the input pressure into cylinders or high pressure systems. Also for all testing applications.

Force Gauges

To measure external load supported by a cylinder or jack in kN. For pressing parts together under pre-determined loads, weighing, testing, etc.

GP-Series are dry gauges.

GF-Series are glycerine filled gauges.

GF GP Series



Pressure Range:

0 - 1000 bar

Force Range:


0 - 2000 kN

Gauge Face Diameter:

100 mm




Accuracy, % of full scale:

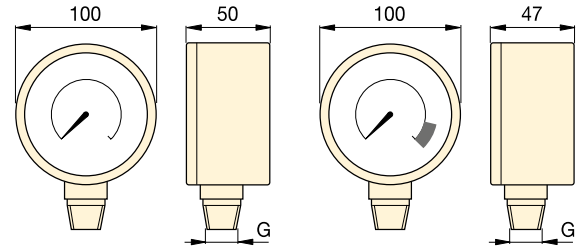± 1%



GP-serie

GF-serie

| Gauge Type and Calibration | | | | Units per Division | Model Number * | Thread G | Gauge Adaptor | | |
|-------------------------------------------------------------------------------------|----------|-------------------------------------------------------------------------------------|---------------|--------------------|----------------|-----------|-------------------------------------------------------------------------------------------|------|------|
|  | |  | | | | |  135 | | |
| bar | psi | bar | kN | | | | Required | | |
| | | | | | | | GA-1 | GA-2 | GA-3 |
| 0-700 | 0-10.000 | - | - | 10 bar, 100 psi | GP-10S | 1/2" NPTF | ● | ● | |
| 0-1000 | 0-15.000 | - | - | 10 bar, 200 psi | GP-15S | 1/2" NPTF | ● | ● | |
| - | - | 0-700 | 0-45 | 10 bar, 0,5 kN | GF-5B | 1/2" NPTF | ● | ● | |
| - | - | 0-700 | 0-100 | 10 bar, 1 kN | GF-10B | 1/2" NPTF | ● | ● | |
| - | - | 0-700 | 0-232 | 10 bar, 2 kN | GF-20B | 1/2" NPTF | ● | ● | |
| - | - | 0-700 | 0-500 | 10 bar, 5 kN | GF-50B | 1/2" NPTF | ● | ● | |
| - | - | 0-700 | 0-124 | 10 bar, 1 kN | GF-120B | 1/2" NPTF | ● | ● | |
| - | - | 0-700 | 0-175/275 | 10 bar, 2 + 5 kN | GF-230B | 1/2" NPTF | ● | ● | |
| - | - | 0-700 | 0-450/900 | 10 bar, 5 + 10 kN | GF-510B | 1/2" NPTF | ● | ● | |
| - | - | 0-700 | 0-210/320/570 | 10 bar, 5 kN | GF-813B | 1/4" NPTF | | | ● |
| - | - | 0-700 | 0-232/300/500 | 10 bar, 5 kN | GF-835B | 1/4" NPTF | | | ● |
| - | - | 0-700 | 0-720/930 | 10 bar, 10 kN | GF-871B | 1/4" NPTF | | | ● |
| - | - | 0-700 | 0-1400/2000 | 10 bar, 25 kN | GF-200B | 1/4" NPTF | | | ● |
| - | - | 0-700 | 0-100 | 10 bar, 1 kN | GF-10B | 1/2" NPTF | ● | ● | |
| - | - | 0-700 | 0-232 | 10 bar, 2 kN | GF-20B | 1/2" NPTF | ● | ● | |
| - | - | 0-700 | 0-500 | 10 bar, 5 kN | GF-50B | 1/2" NPTF | ● | ● | |
| - | - | 0-700 | 0-720/930 | 10 bar, 10 kN | GF-871B | 1/4" NPTF | | | ● |
| - | - | 0-700 | 0-1400/2000 | 10 bar, 25 kN | GF-200B | 1/4" NPTF | | | ● |

* GF-Series Force gauges with imperial scale reading (psi, lbs) are available by changing the suffix 'B' into 'P'.

▼ Shown from left to right: H4049L, G-2534R, G-4089L, G-2535L, G-4040L




Glycerine Filled (G-Series)

- Dual scale reading calibrated in bar and psi
- All pressure sensing parts sealed and dampened by glycerine for long life
- Includes safety blow-out disk and pressure equalizing membrane
- Gauge snubbers or needle valves recommended for high cycle applications.

High Cycle Dry Gauges (H-Series)

- Dual scale reading calibrated in bar and psi
- Ideal for use in many applications, specifically for high cycle and harsh environments
- Gauge snubbers or needle valves recommended to shut off gauge when not in use.

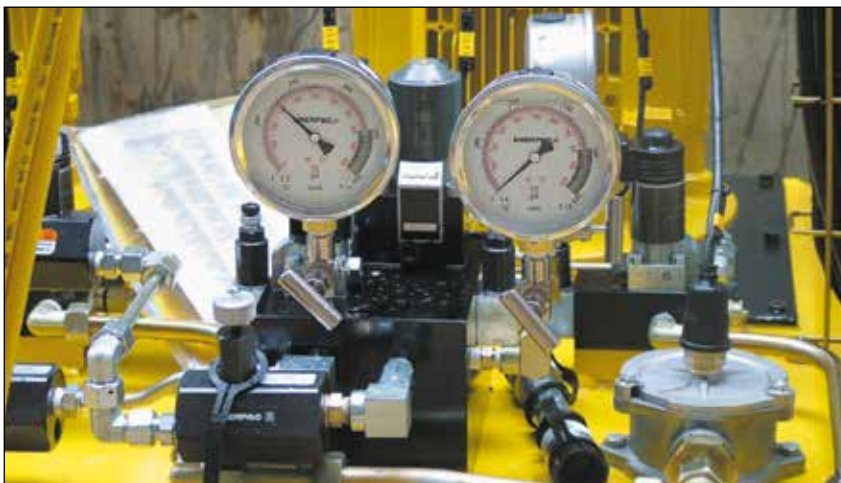

Visual Reference of System Pressure



Gauge adaptor assembly

45° Angled gauge adaptor **GA45GC** improves safe working conditions.

Page: **134**



Gauge Adaptor

For easy gauge installation into almost any system, Enerpac offers a complete line of gauge adaptors.

Page: **135**



Snubber Valve V-91

Infinitely adjustable for metering oil out of a gauge. The V-91 Snubber Valve is also suitable as a shut-off valve to protect the gauge during

high cycle applications.

Page: **136**

◀ When lifting or pressing, always use a gauge. A gauge is your 'window' to the system. It lets you see what's going on.

Hydraulic Pressure Gauges



CAUTION! When lifting or pressing, always use a gauge
Do not override factory setting of relief valves. Always use a gauge to check system pressure. A gauge is your 'window' to the system. It lets you see what's going on. See our Safety Instructions.

Page: 265

G H Series



Pressure Range:


0 - 1000 bar

Face Diameter:

63 - 100 mm

Accuracy, % of full scale:

± 1,0 - 1,5%

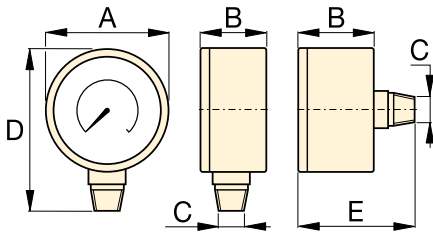

| Size (mm) | Connection | Dimensions (mm) | | | | |
|--------------|-------------|-----------------|----|---------|-----|----|
| | | A | B | C | D | E |
| 63 | Lower Mount | 63 | 37 | ¼" NPTF | 84 | - |
| 63 | Center Rear | 63 | 37 | ¼" NPTF | - | 63 |
| 100 | Lower Mount | 100 | 29 | ¼" NPTF | 121 | - |
| 100 | Lower Mount | 100 | 49 | ½" NPTF | 136 | - |

Note: dimensions for reference only.



Maximum Indicator Pointer

Indicator retains peak readings of pressure or force generated by the system.

Can easily be installed on GP and H-Series
ø 100 mm gauges. Order model nr: **BSA-881**.

▼ SELECTION CHART

| Gauge Series | Pressure Range | | Model Number | | | | Major Graduation | | Minor Graduation | | Major Graduation | | Minor Graduation | |
|--------------|----------------|----------|--------------------------------|--------------------------------|---------------------------------|---------------------------------|------------------|-------|------------------|-------|------------------|-------|------------------|-------|
| | | | ø 63 ¼" NPTF Lower Mount | ø 63 ¼" NPTF Center Rear | ø 100 ¼" NPTF Lower Mount | ø 100 ½" NPTF Lower Mount | bar | | psi | | bar | | psi | |
| | (bar) | (psi) | Accuracy: ± 1,5 % | | Accuracy: ± 1,0 % | | ø 63 | ø 100 | ø 63 | ø 100 | ø 63 | ø 100 | ø 63 | ø 100 |
| | G-Series | 0-7 | 0-100 | G2509L | - | - | - | 1 | - | 0,01 | - | 10 | - | 2 |
| 0-11 | | 0-160 | G2510L | - | - | - | 1 | - | 0,02 | - | 10 | - | 2 | - |
| 0-14 | | 0-200 | G2511L | - | - | - | 1 | - | 0,02 | - | 50 | - | 5 | - |
| 0-20 | | 0-300 | G2512L | - | - | - | 5 | - | 0,50 | - | 50 | - | 5 | - |
| 0-40 | | 0-600 | G2513L | - | - | - | 10 | - | 1 | - | 100 | - | 10 | - |
| 0-70 | | 0-1.000 | G2514L | G2531R | - | - | 10 | - | 1 | - | 100 | - | 20 | - |
| 0-140 | | 0-2.000 | G2515L | - | - | - | 10 | - | 5 | - | 500 | - | 50 | - |
| 0-200 | | 0-3.000 | G2516L | - | - | - | 50 | - | 5 | - | 500 | - | 50 | - |
| 0-400 | | 0-6.000 | G2517L | G2534R | - | - | 100 | - | 10 | - | 1000 | - | 100 | - |
| 0-700 | | 0-10.000 | G2535L | G2537R | G4088L | G4039L | 100 | 100 | 10 | 10 | 2000 | 1000 | 200 | 100 |
| 0-1000 | 0-15.000 | G2536L | G2538R | G4089L | G4040L | 100 | 100 | 20 | 20 | 3000 | 3000 | 200 | 200 | |
| H-Series | 0-700 | 0-10.000 | - | - | H4049L | H4071L | - | 100 | - | 10 | - | 1000 | - | 100 |

T-Series, Test System Gauges

▼ Gauge shown: T-6003L



- Dual scale reading calibrated in bar and psi
- All gauges have spring-loaded backs with rubber blow-out plugs to protect case assembly in case of over-pressurization
- Integral maximum indicator pointer standard included
- 2800 and 3500 bar models include flange mounting
- ½" NPTF versions are made of high strength alloy steel
- 0.25" cone models are made of 316 stainless steel, with 403 stainless steel on 2800 and 3500 bar models.

T Series

Pressure Range:
0 - 3500 bar

Face Diameter:
162 - 192 mm

Accuracy, % of full scale:
± 0,5 - 1,5%



Cone Mount Gauge Adaptor

Contains fittings to connect ¼" cone fitting gauge to ⅜" cone system. Kit includes 43-301 tee, 43-704 gauge adaptor and 45-116 tubing. Order model number: **83-011**.



Page: **81**



Cone Mount Gauge Connector

For connecting gauges with 0.25" cone fitting directly to model number **11-100** or **11-400** pump (page 80). May be used with other

0.25" cone systems
Order model number: **43-704**

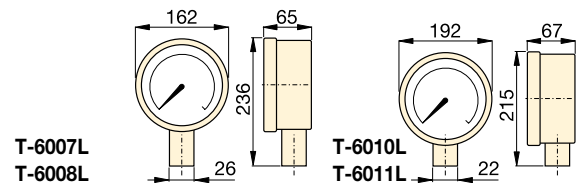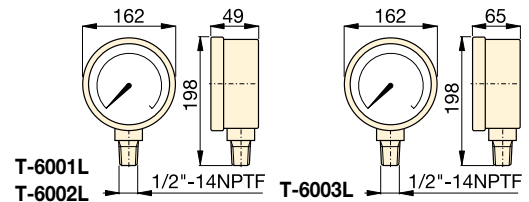

▼ An Enerpac P-2282 hand pump equipped with a T-6011L test system gauge is used for proof pressure testing of hydraulic valves.



| Pressure Range (bar) | Pressure Range (psi) | Model Number | | Number Intervals (bar) | Graduation Intervals (bar) | Number Intervals (psi) | Graduation Intervals (psi) |
|-------------------------|-------------------------|------------------------|------------------------------|---------------------------|-------------------------------|---------------------------|-------------------------------|
| | | Alloy Steel ½" NPTF | Stainless Steel 0,25 cone | | | | |
| 0-70 ¹⁾ | 0-1000 | T-6001L | – | 10 | 1 | 100 | 10 |
| 0-350 ¹⁾ | 0-5000 | T-6002L | – | 50 | 5 | 500 | 50 |
| 0-700 ¹⁾ | 0-10.000 | T-6003L | T-6007L | 100 | 10 | 1.000 | 100 |
| 0-1400 ¹⁾ | 0-20.000 | – | T-6008L | 200 | 20 | 1.000 | 100 |
| 0-2800 ²⁾ | 0-40.000 | – | T-6010L | 500 | 20 | 5.000 | 200 |
| 0-3500 ²⁾ | 0-50.000 | – | T-6011L | 500 | 50 | 5.000 | 200 |

¹⁾ Accuracy ± 0,5%


²⁾ Accuracy ± 1,5%

Digital Hydraulic Pressure Gauge

▼ Gauge shown: **DGR-2**



- Rated for system pressure up to 1380 bar
- Displays in bar, psi, MPa and kg/cm²
- Zero reset - ensures that gauge reads actual pressure
- IP65 protection, UL listed, CE and RoHS compliant
- Batteries included, condition indicator on read-out
- Shut-off selectable – menu driven
- Back-lit readout allows easy reading in less than ideal lighting
- Protective cover included.

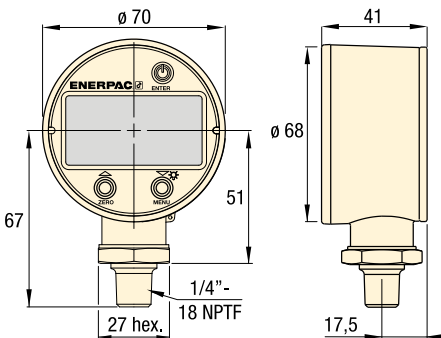

| High Pressure Rating (bar) | | High Pressure Rating (MPa) | | Model Number | High Pressure Rating (psi) | | High Pressure Rating (kg/cm ²) | |
|-------------------------------|------------|-------------------------------|------------|--------------|-------------------------------|------------|-----------------------------------------------|------------|
| Range | Resolution | Range | Resolution | | Range | Resolution | Range | Resolution |
| 0-1380 | 0,1 | 0-140 | 0,01 | DGR-2 | 0-20.000 | 1 | 0-1400 | 0,1 |

Weight: 0,23 kg.

DGR Series

Pressure Range:

0 - 1380 bar

Voltage:

3 Volt (battery)

Accuracy, % of full scale:

± 0,25%



Gauge Adaptor

For easy gauge installation into almost any system, Enerpac offers a complete line of gauge adaptors. Maximum operating pressure 700 bar.

Page: 135

▼ Greater accuracy and easier to read: enhance your ability to monitor and control hydraulic system pressure up to 1380 bar.



Gauge Adaptor Assembly

▼ Shown: GA45GC



- 45° angled gauge improves visibility
- Slim and narrow design
- Easy to fit in a broad range of systems
- Maximize controlled load movement
- Glycerin dampened gauge with dual scale
- Enerpac High-Flow female coupler CR400.

GA45GC, AMGC Series

Connection 1:
3/8" NPTF male

Connection 2:
CR-400 coupler

Maximum Operating Pressure:
700 bar



4 Way Manifold assembly complete with gauges

Offering ease of portability and convenience with an ergonomic robust design, ready for use.

Enerpac's CR400 female couplers on all ports allow the manifold to be quickly connected to up to 4 cylinders. Glycerine filled, 700 bar gauges allow operators to work safely. All protected by the robust protection frame.

| Manifold Type (Used for cylinders) | Model Number |
|------------------------------------|---------------|
| 4x Single-acting | AMGC41 |
| 4x Double-acting | AMGC42 |




Power Box

Portable tool box with hand pump, GA45GC gauge adaptor assembly, hose and RC, RSM, RCS-cylinder, WR5 wedgie or LW16-lifting wedge.

Page: **61**

▼ The Gauge Adaptor Assembly is the window to your system; allows easy reading of the pressure for safe operation.

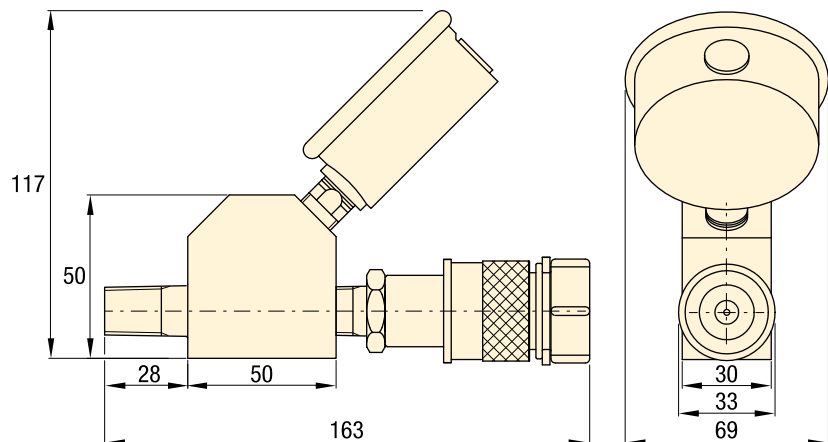

| Model Number | Gauge Port (1/4" NPTF) | Male End (NPTF) | Female End (3/8" NPTF) | Gauge Range | |
|---------------|------------------------|-----------------|------------------------|-------------|------------|
| | | | | (bar) | (psi) |
| GA45GC | G2535L | 3/8" -18 | CR-400 | 0 - 700 | 0 - 10.000 |

Gauge Accessories

▼ Shown from left to right: GA-3, V-91, GA-1, GA-2, GA-4, NV-251, GA-918



GA, NV, V Series

Maximum Operating Pressure:
700 bar


▼ A gauge is easily installed into your hydraulic system using a gauge adaptor.




Gauge Adaptors (GA-Series)

- For easy mounting of a pressure gauge onto your system
- Male end screws into pump or cylinder port, female end accepts hose or coupler, 3rd port is for gauge connection
- GA-918 provides for swivel connection.

| Model Number | Gauge Port (NPTF) | Male End (NPTF) | Female End (NPTF) | Dimensions (mm) | | | | | |
|--------------|-------------------|-----------------|-------------------|-----------------|----|-----------|-----------|-----------|----|
| | | | | A | B | C | D | E | F |
| GA-1 | 1/2" | 3/8" | 3/8" | 71 | 31 | 1/2" NPTF | 3/8" NPTF | 3/8" NPTF | 32 |
| GA-2 | 1/2" | 3/8" | | 155 | 35 | 1/2" NPTF | 3/8" NPTF | 3/8" NPTF | 32 |
| GA-3 | 1/4" | 3/8" | | 133 | 35 | 1/4" NPTF | 3/8" NPTF | 3/8" NPTF | 32 |
| GA-4 | 1/2" | 1/4" | | 111 | 35 | 1/2" NPTF | 1/4" NPTF | 3/8" NPTF | 32 |



GA-1




GA-2, GA-3, GA-4



Swivel Adaptor (GA-918)

- Simplifies gauge installation and reading.


| Model Number | Dimensions (mm) | | | | | | | |
|--------------|-----------------|----|-----------|------|-----------|----|----|--|
| | A | B | C | D | E | S | S1 | |
| GA-918 | 117 | 43 | 1/2" NPTF | 28,5 | 1/2" NPTF | 29 | 38 | |



Needle Valves (V- and NV-Series)

- Both NV-251 and V-91 provide positive shut-off
- 303 stainless steel stem, 16 threads/in (NV-251).

| Model Number | Orifice (mm) | Thread Size | Dimensions (mm) | | | | | | |
|--------------|--------------|-------------|-----------------|----|-----------|----|----|----|----|
| | | | A | B | C | D | E | F | H |
| NV-251 | 4,3 | 1/4" NPTF | 57 | 29 | 1/4" NPTF | 57 | 46 | 19 | 19 |
| V-91 | 4,8 | 1/2" NPTF | 89 | 32 | 1/2" NPTF | 64 | 32 | 37 | 37 |



▼ From left to right: V-152, V-66, V-82, V-161, V-42, V-17



Your Hydraulic Control Solution



Valve Applications


To see these valves used in typical hydraulic circuits, please see our 'Yellow Pages'.

Page: **268**

▼ The V-152 pressure relief valve limits the pressure or force developed in the hydraulic system.



- All valves are rated for 700 bar operating pressure
- All valves feature NPTF porting to insure against leakage at rated pressure
- All valves are painted, coated, or plated for corrosion resistance
- Viton® seals (in V-66NV and V-152NV) for high temperature applications, nickel-plated for maximum corrosion resistance.

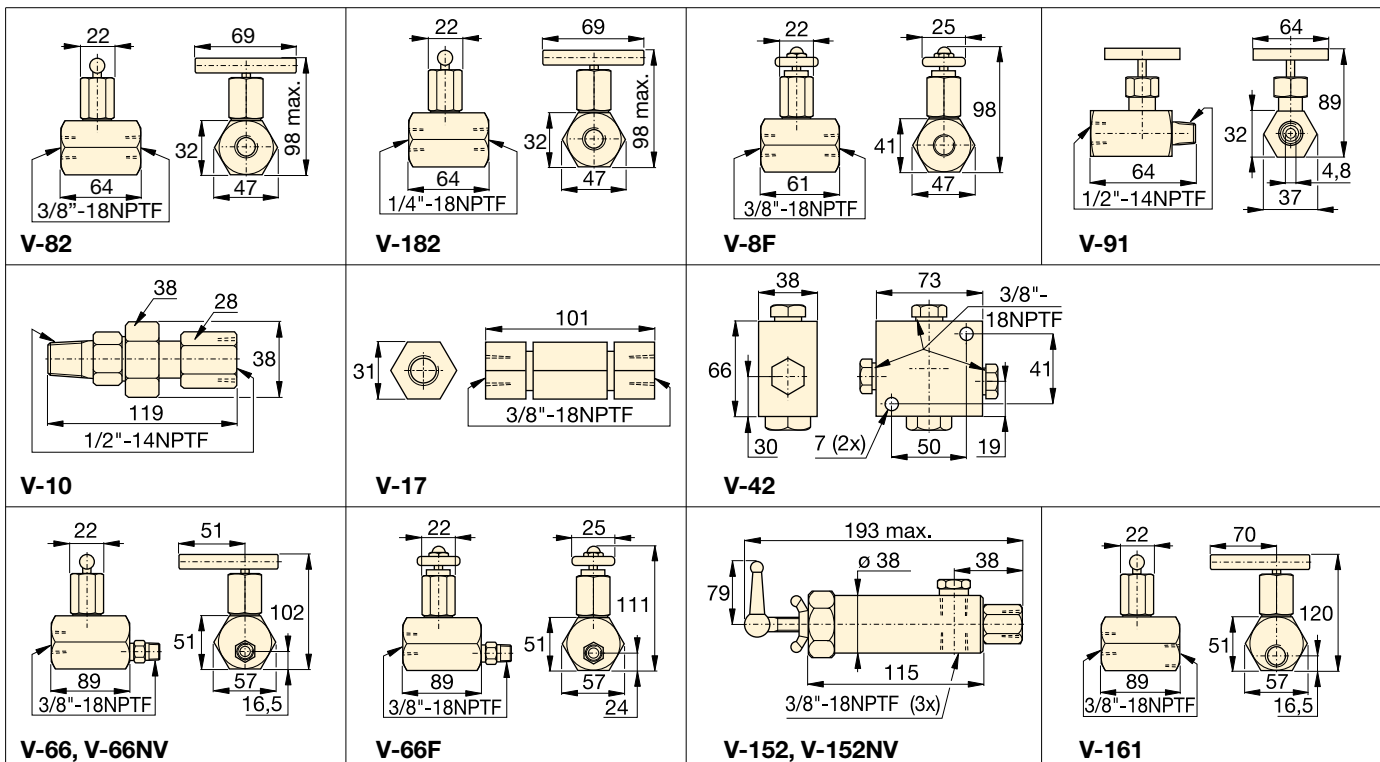

Valve dimensions in mm

Pressure and Flow Control Valves



Control Manifolds

For two or four port manifolds with integral flow control valves, see the manifold page of the System Components section.

Page: 126



Fittings

For additional fittings see the fitting page of the System Components section in this catalogue.

Page: 127

V Series



Maximum Operating Pressure:

700 bar

| Valve Type and Model Number | | Description | | Hydraulic Symbol |
|----------------------------------------------------------|--|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------|
| Needle Valve V-82 V-182 V-8F | | V-82: To control cylinder speed. Can also be used as shut-off valve for temporary load holding. 3/8" NPTF ports, nickle plated. V-182: Same as V-82, but with 1/4" NPTF female ports, nickle plated. | Also suitable for gauge snubbing (also V-82). V-8F: Like V-82, but with very fine metering for precise flow control 0,16-14,7 l/min at 275 bar. Not recommended as shut-off valve. | |
| Snubber Valve V-91 | | V-91: Infinitely adjustable for metering oil out of a gauge to prevent snapping of gauge pointer when load or pressure is suddenly released. | Also suitable as shut-off valve to protect the gauge during high cycling applications. 1/2" NPTF male and female threads for use with GA-1, GA-2 or GA-4 gauge adaptors. | |
| Auto Damper® Valve V-10 | | V-10: To be used when gauge pressure must be monitored during high cycle applications. Creates a flow resistance when load is released suddenly. No adjustments are necessary. | 1/2" NPTF male and female threads for use with GA-1, GA-2 or GA-4 gauge adaptors. | |
| Check Valve V-17 | | V-17: Ruggedly built to resist shock and operate with low pressure drop. Closes smoothly without pounding. 3/8" NPTF female port. | | |
| Pilot Operated Check Valve V-42 | | V-42: Can be mounted at the cylinder to hold the load in case of system pressure loss. Normally used with double-acting cylinders where pilot port receives pressure from a Tee-fitting in the cylinder retract line. | 3/8" NPTF female ports. Pilot presure ratio 14% (6,5:1). | |
| Manually Operated Check Valve V-66, V-66NV * V-66F | | V-66, V-66NV: For load holding applications with single and double acting cylinders. Valves allow oil to flow back to tank when cylinder retracts. V-66NV with Viton seals, nickel-plated. | V-66F: Similar to V-66, but with very fine metering capability for precise flow control. V-66F is not designed for load holding. | |
| Pressure Relief Valve V-152 V-152NV * | | V-152: Limits pressure developed by the pump in hydraulic circuit, thus limiting the force imposed on other components. Valve opens whenever preset pressure is reached. | To increase pressure setting, turn handle clockwise. Includes: • 0,9 m return line hose kit, • ± 3% repeatability, • 55-700 bar adjustment range. | |
| Sequence Valve V-161 | | V-161: To control oil flow to a secondary circuit. Flow is blocked until system pressure rises to the V-161 setting. When this pressure level is reached, the V-161 opens to allow flow to the secondary circuit. | A pressure differential is always maintained between the primary and secondary circuit. Mininum operating pressure: 140 bar. | |

* See page 60 for more information about products for use in high temperature and extreme environment applications.


Enerpac Hydraulic Presses are available in a variety of capacities and sizes. The press frames are designed for maximum strength and durability. Strong frames and powerful high-pressure hydraulics will provide years of dependable service in many applications.

Enerpac Presses are available in Bench, C-Frame, Arbor, Workshop and Roll-Frame models.

These Press features increase productivity and broaden the range of applications:

Side-to-side cylinder movement

Lateral movement capability of cylinder in upper bed.




Press Kits

The 50 and 75 ton XLP-Series presses come as unassembled kits, and include complete press frame, winch, cylinder, pump with gauge, couplers and hose.










Winch

Movable upper and lower bed with self-braking winch on XLP-Series presses.



Hydraulic Presses Section Overview

| Capacity ton (kN) | Press type and functions | Series | | Page |
|-----------------------|---------------------------------------------|------------|---------------------------------------------------------------------------------------|-------|
| 10 (101) | Bench Presses | VLP |  | 140 ▶ |
| 25 - 200 (232 - 1995) | Workshop Presses | XLP VLP |  | 140 ▶ |
| 50 - 200 (498 - 1995) | Roll-Frame Presses | BPR |  | 142 ▶ |
| 5 - 20 (45 - 178) | C-Clamp Presses | A |  | 144 ▶ |
| 10 - 30 (101 - 295) | Arbor Presses | A |  | 144 ▶ |
| 10 - 200 (101 - 1995) | Press Accessories Press Application Idea | VB, A, IPL |  | 146 ▶ |
| 900 - 90.000 kg | Tension Meters Load Cells | TM LH |  | 147 ▶ |

Available in capacities from 10 to 200 ton, each Enerpac press consists of three basic high quality components: a press frame, a power source and a cylinder.

Press Frame

Press frames include features like workpiece side-loading and height adjustment of the upper and lower bed.

Power Source

Depending on the production requirements, Enerpac presses can be powered by manual, air-hydraulic and electric-drive power sources.

Cylinder

Depending on the application, double-acting cylinders offer increased efficiency. Check out the Selection Charts for the press best suited for your needs.

Gauge

All Workshop presses and Roll-Frame Presses feature an easy to monitor pressure/force gauge for increased safety.



IMPORTANT!

The pressframe of the workshop presses are exclusively designed for pressing operations, not for pulling. For pulling applications please contact Enerpac.

In order to fully comply with CE regulations, some presses must be equipped with specific safety components, such as spring centered valves, two-hand control devices, guards or others.

Enerpac standard general purpose presses are supplied without guards, and have a plunger speed of less than 10 mm/second. However, your application may require that measures should be taken to reduce the risk of injury to operators and other personnel by providing appropriate safeguarding, training and conducting a risk assessment, which eliminates or reduces danger.

Health & safety within your workplace is your responsibility, not that of Enerpac.

Advice on such matters is available from your local enforcement agency. If you require any further information on Enerpac accessories that may help you conform to the Machinery Directive or European legislation contact Enerpac.



▼ From left to right: XLP-506XA12G, XLP-256XA11G



No Workshop can do without one



XA-Series Foot Pump

The XLP-press with XA-Series air powered foot pump: no need to fully lift up foot – rest bodyweight on heel, resulting in a handsfree and stable working position – safe and controlled press operation (see page 108 for XA-Series Pumps).



Gauges

All press models include a gauge and gauge adaptor, matching the press capacity.



Easy grip forklift access

Cut-away in lower frame for pallet truck access allows easy transportation of 50 and 75 ton XLP-series presses.



Side-to-side cylinder movement

Cylinder can be positioned horizontally side-to-side on all XLP-Series presses.



XLP-Series Presses

- Multi-functional presses in kit form (50 and 75 ton presses)
- Easy grip forklift access on 50 and 75 ton presses
- Height adjustment of upper or lower bed with winch (50 & 75 ton)
- Width adjustment allows cylinder to move from side-to-side
- Pump options include XA-Series air-operated foot pump
 - pressure gauge integrated in pump for optimal control
 - suitable for delicate pressing jobs from variable oil flow.

VLP-Series presses

- Unique “Hydrajust” bed positioning device on 100 and 200 ton VLP-presses allows adjustment of the lower bed.

▼ SELECTION CHART

| Press Capacity ton (kN) | Maximum Daylight (mm) | | Press Model Number | Power Source | | | | | Cylinder | | | | | | |
|----------------------------|-----------------------|------------|--------------------|--------------|-------|-----|------------|-------|----------------|-------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|-------------|--------------------|-------|
| | Vertical | Horizontal | | Pump Type | | | Valve Type | | Pump Model Nr. | Page: |  |  | Stroke (mm) | Cylinder Model Nr. | Page: |
| | | | | Man. | Elec. | Air | Man. | Elec. | | | | | | | |
| 10 (101) | 430 | 435 | VLP-106P142 | ● | | | ● | | P-142 | 72 | ● | | 156 | RC-106 | 6 |
| | 430 | 435 | VLP-106PAT1 | | | ● | ● | | PATG-1102N | 106 | ● | | 156 | RC-106 | 6 |
| 25 (232) | 1228 | 510 | XLP-256P392 | ● | | | ● | | P-392 | 72 | ● | | 158 | RC-256 | 6 |
| | 1228 | 510 | XLP-256XA11G | | | ● | ● | | XA-11G | 108 | ● | | 158 | RC-256 | 6 |
| 50 (498) | 980 | 990 | XLP-506P802 * | ● | | | ● | | P-802 | 74 | ● | | 159 | RC-506 | 6 |
| | 980 | 990 | XLP-506XA12G * | | | ● | ● | | XA-12G | 108 | ● | | 159 | RC-506 | 6 |
| | 980 | 990 | XLP-506ZES * | | ● | | | ● | ZE4410SE-E050 | 98 | | ● | 156 | RR-506 | 36 |
| | 980 | 990 | XLP-5013ZES * | | ● | | | ● | ZE4410SE-E050 | 98 | | ● | 334 | RR-5013 | 36 |
| 75 (718) | 970 | 990 | XLP-756XA12G * | | | ● | ● | | XA-12G | 108 | ● | | 156 | RC-756 | 6 |
| 100 (933) | 989 | 990 | VLP-1006ZES | | ● | | | ● | ZE5420SW-E050 | 98 | | ● | 168 | RR-1006 | 36 |
| | 989 | 990 | VLP-10013ZES | | ● | | | ● | ZE5420SW-E050 | 98 | | ● | 333 | RR-10013 | 36 |
| 200 (1995) | 1340 | 1220 | VLP-20013ZES | | ● | | | ● | ZE6420SW | 98 | | ● | 330 | RR-20013 | 36 |

* 50 and 75 ton XLP-Series presses can be ordered as factory assembled press frame. Add suffix “M” to press model number. Example: XLP-506XA12G-M.



= Single-Acting



= Double-Acting

Bench and Workshop Presses




Optional V-Blocks

To facilitate positioning of pipes and bars, or placed upside-down, to serve as a convenient worktable. Featuring precise fit into the press bolster. Each model number includes two V-blocks.

press bolster. Each model number includes two V-blocks.

| To be used with press (ton) | V-Blocks Model Number |
|-----------------------------|-----------------------|
| 10 | VB-10 |
| 25 | VB-25 |
| 50 | VB-501 |
| 75, 100 | VB-101 |
| 200 | A-200 |




VLP 10 ton

"Hydrajust" Bed Positioning

Allows vertical adjustment of the lower bed on 100 and 200 ton VLP presses.

IMPORTANT: The "Hydrajust" bed positioning is not designed to withstand full cylinder capacity, only to be used for bed adjustment.

Page: 146

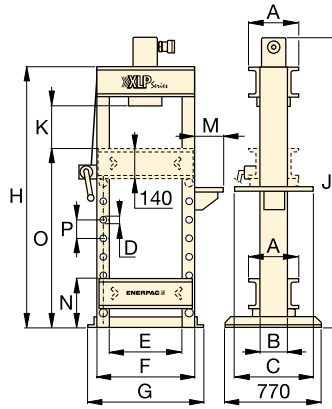

XLP 25 ton

XLP, VLP Series



Capacity:

10 - 200 ton

Maximum Daylight x Width:

1340 x 1220 mm


Maximum Operating Pressure:

700 bar




IMPORTANT!


The pressframe of the workshop presses are exclusively designed for pressing operations, not for pulling. For pulling applications please contact Enerpac.

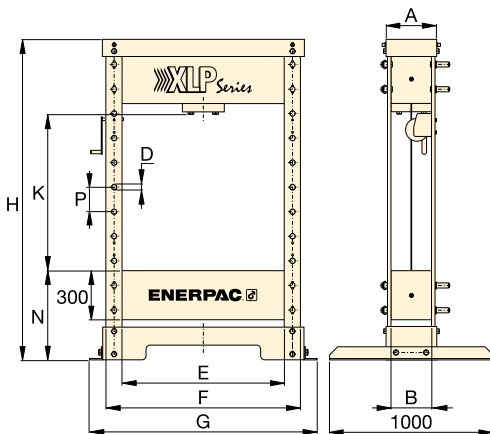

XLP 50 and 75 ton

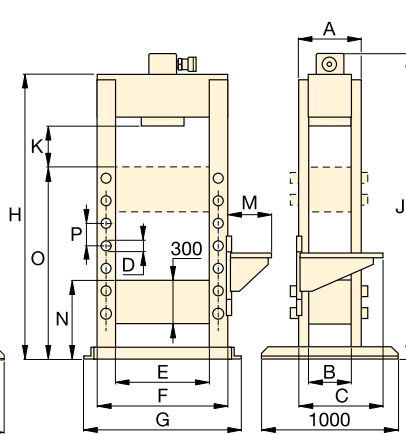

VLP 100 ton

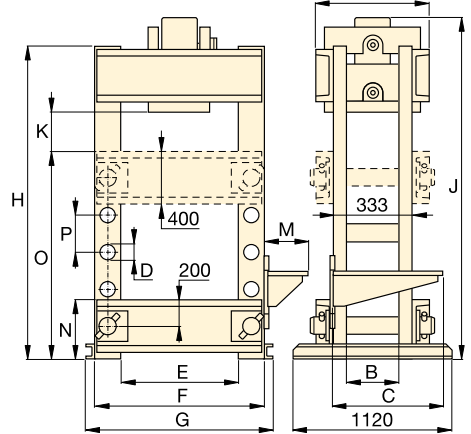

VLP 200 ton

| Speed (mm/s) ** | | Dimensions (mm) | | | | | | | | | | | | | | | Press Model Number |
|-----------------|----------|-----------------|-----|-----|----|------|------|------|------|------|----------|-----|-----|------|-----|------|--------------------|
| Rapid Advance | Pressing | A | B | C | D | E | F | G | H | J | K | M | N | O | P | (kg) | |
| {2,5} ** | {0,6} ** | 110 | 80 | - | - | 435 | - | 542 | 620 | 748 | 430 | - | 80 | - | - | 49 | VLP-106P142 |
| 10,0 | 1,8 | 110 | 80 | - | - | 435 | - | 542 | 620 | 748 | 430 | - | 80 | - | - | 54 | VLP-106PAT1 |
| {3,4} ** | {0,7} ** | 260 | 140 | 510 | 32 | 510 | 630 | 700 | 1622 | 1740 | 370-1228 | 140 | 212 | 1070 | 122 | 165 | XLP-256P392 |
| 10,0 | 1,3 | 260 | 140 | 610 | 32 | 510 | 630 | 700 | 1622 | 1740 | 370-1228 | 323 | 212 | 1070 | 122 | 170 | XLP-256XA11G |
| {5,5} ** | {0,3} ** | 310 | 240 | - | 32 | 990 | 1190 | 1390 | 1995 | - | 210-980 | - | 540 | - | 150 | 595 | XLP-506P802 * |
| 4,7 | 0,6 | 310 | 240 | - | 32 | 990 | 1190 | 1390 | 1995 | - | 210-980 | - | 540 | - | 150 | 600 | XLP-506XA12G * |
| 10,0 | 2,0 | 310 | 240 | - | 32 | 990 | 1190 | 1390 | 1995 | - | 210-980 | - | 540 | - | 150 | 660 | XLP-506ZES * |
| 10,0 | 2,0 | 310 | 240 | - | 32 | 990 | 1190 | 1390 | 1995 | - | 210-980 | - | 540 | - | 150 | 700 | XLP-5013ZES * |
| 3,2 | 0,4 | 420 | 330 | - | 40 | 990 | 1240 | 1430 | 1995 | - | 210-970 | - | 540 | - | 150 | 900 | XLP-756XA12G * |
| 10,0 | 2,1 | 400 | 340 | 560 | 40 | 990 | 1240 | 1400 | 1879 | 1885 | 239 | 425 | 540 | 1290 | 150 | 970 | VLP-1006ZES |
| 10,0 | 2,1 | 400 | 340 | 560 | 40 | 990 | 1240 | 1400 | 1879 | 2050 | 239 | 425 | 540 | 1290 | 150 | 993 | VLP-10013ZES |
| 6,6 | 1,6 | 553 | 233 | 560 | 76 | 1220 | 1620 | 1740 | 2285 | 2370 | 377 | 425 | 453 | 1415 | 254 | 1992 | VLP-20013ZES |

** {...} = advance speed in mm per handpump stroke.

▼ Shown: BPR-5075



Expert Designed Versatility

- Quality welded frame for maximum strength and long life
- Frame rolls easily on 4 steel roller bearings
- Exclusive 'Hydra-Lift' bolster for effortless adjustment of the vertical daylight
- Standard roller head design allows lateral movement and locking of the cylinder up to 300 mm left or right of centre
- All models in the quick selection chart have been matched to an electric pump, double-acting cylinder, hose and gauge, offering the complete package
- Roll-Frame design features a stationary bed with the ability to support heavy loads
- Hydraulic clamp cylinder locks roll-frame into position.



Cylinder adjustment


Cylinder adjustment allows horizontal side to side cylinder positioning.



Hydra-Lift

Allows easy, effortless daylight adjustment. Standard on all Roll-Frame presses.

Page: 146



Optional V-Blocks

These V-Blocks are designed for easy fixturing of round stock and other non-uniform materials. Featuring precise fit into the press bolster.

Page: 146

▼ SELECTION CHART

| Press Capacity ton (kN) | Vertical Daylight A (mm) | | Maximum Bed Width E (mm) | Electric Pump | | Press Model Number | Double-Acting Cylinder | | | Speed (mm/sec) | |
|----------------------------|--------------------------|------|--------------------------|---------------|------|--------------------|------------------------|--------------|------|----------------|----------|
| | min. | max. | | Model Number | Page | | Stroke (mm) | Model Number | Page | Rapid Advance | Pressing |
| 50 (498) | 152 | 942 | 730 | ZE5420SW-S | 98 | BPR-5075 | 334 | RR-5013 | 36 | 4,1 | 3,9 |
| 100 (933) | 159 | 1048 | 889 | ZE3420SW | 98 | BPR-10075 | 333 | RR-10013 | 36 | 7,7 | 0,7 |
| 200 (1995) | 279 | 1295 | 1219 | ZE4420SW | 98 | BPR-20075 | 330 | RR-20013 | 36 | 5,2 | 0,5 |

Roll-Frame Presses




▲ For offshore application high capacity spring loaded cylinders need to be assembled and tested. A special 100 ton roll frame press, with long stroke cylinder has been constructed. All movements are operated and monitored through a PLC controlled pendant.



IMPORTANT!

The frameworks of the presses are exclusively designed for pressing operations, not for pulling. For pulling applications please contact Enerpac.

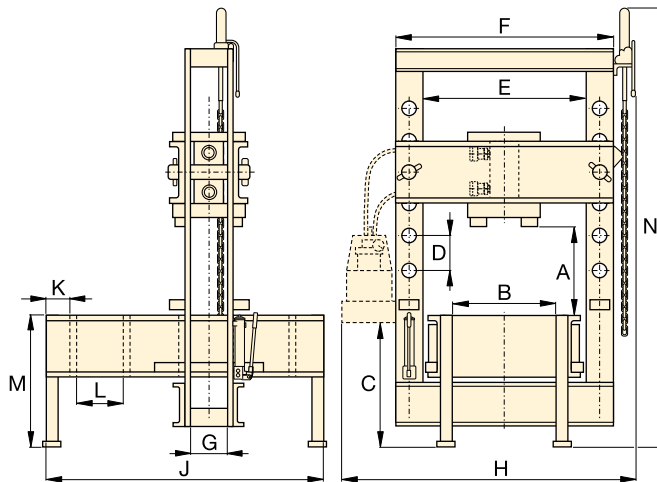

BPR Series



Capacity:

50 - 200 ton

Maximum Daylight x Width:

1295 x 1222 mm

Maximum Operating Pressure:

700 bar



Gauges

All press models include a gauge and gauge adaptor, matching the press capacity:

| Press Capacity | Gauge Model Number | Adaptor Model Number |
|----------------|--------------------|----------------------|
| ton | | |
| 50 | GF-50B | GA-2 |
| 100 | GF-871B | GA-3 |
| 200 | GF-200B | GA-3 |

For more information on gauges, please refer to the System Components section.

Page: 128



Spring Centred Valves

Manual valves on electric and air pumps of Enerpac presses are Spring Centred Valves. The handle will automatically move into the neutral valve position when released.

Page: 117

| Roll-Frame Press Dimensions (mm) | | | | | | | | | | | | | Press Model Number | |
|----------------------------------|-----|-----|-----|------|------|-----|------|------|-----|-----|-----|------|--------------------|------------------|
| A (min.-max.) | B | C | D | E | F | G | H | J | K | L | M | N | | (kg) |
| 152 - 942 | 526 | 971 | 264 | 730 | 933 | 127 | 1420 | 1626 | 203 | 270 | 762 | 2870 | 917 | BPR-5075 |
| 159 - 1048 | 673 | 965 | 222 | 889 | 1143 | 146 | 1605 | 1676 | 203 | 270 | 813 | 3021 | 1767 | BPR-10075 |
| 279 - 1295 | 984 | 933 | 254 | 1219 | 1626 | 232 | 2150 | 2197 | 203 | 381 | 915 | 3200 | 4186 | BPR-20075 |

▼ Shown from left to right: A-220, A-330 and A-310



The Standard Workshop Tools

C-Clamp Press

- 5, 10 and 20 ton capacity
- Operational in all positions.

Arbor Press

- 10 and 30 ton capacity
- Foot mounting holes for horizontal or vertical positioning
- Machined working surfaces for easier fixturing
- Slotted back to simplify loading and unloading of longer parts.

▼ A-310 Arbor Press



Push Pin A-183

For applications requiring precision pressing, such as shaft removal and insertion. This attachment fits 10 ton cylinders and requires the use of a threaded adaptor saddle (A-13).

Page: 66



Smooth Saddle A-185

For pressing applications of delicate parts, such as aluminium castings, this saddle decreases surface marks during the pressing application. Requires 10 ton cylinder and threaded adaptor saddle (A-13).

Page: 167



10 ton Bench Presses

For 10 ton VLP-Series Bench Presses selection see:

Page: 140

▼ SELECTION CHART

| Press Type | Press Capacity ton (kN) | Maximum Vertical Daylight (mm) | Maximum Bed Width (mm) | Press Model Number | Cylinder Model Number * | Page: |
|------------|----------------------------|-----------------------------------|---------------------------|--------------------|-------------------------|-------|
| C-Clamp | 5 (45) | 165 | 51 | A-205 | 5 ton RC-cylinder * | 6 |
| | 10 (101) | 228 | 57 | A-210 | 10 ton RC-cylinder * | 6 |
| | 20 (178) | 305 | 70 | A-220 | 25 ton RC-cylinder ** | 6 |
| Arbor | 10 (101) | 227 | 135 | A-310 | 10 ton RC-cylinder * | 6 |
| | 30 (295) | 260 | 178 | A-330 | RC-308 * | 6 |

* Recommended cylinder must be ordered separately.

** Must be limited to 20 ton.

C-Clamp and Arbor Presses



▲ RC-308 cylinder mounted in A-330 Arbor Press powered by a PATG-Turbo Air pump for controlled pressing of bearings for sprockets of weaving machines. The V-152 Pressure Relief Valve controls the pressing force.

A Series



Capacity:
5 - 30 ton

Maximum Daylight x Width:
305 x 178 mm

Maximum Operating Pressure:
700 bar



IMPORTANT!

For high-cycle production applications, the C-Clamp and Arbor presses should be limited to 50% of their capacity.



Hydraulic Cylinders

Cylinders for C-Clamps and Arbor Presses must be ordered separately.

Page: **6**





Hydraulic Pumps


Pumps for C-Clamps and Arbor Presses must be ordered separately.

Page: **71**


Top View Working Surface

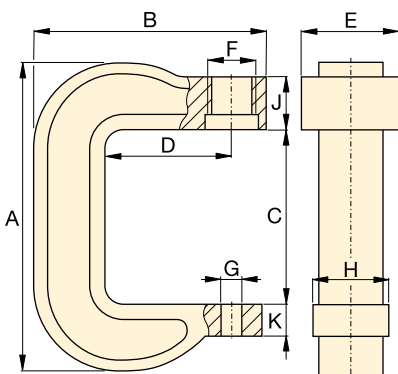

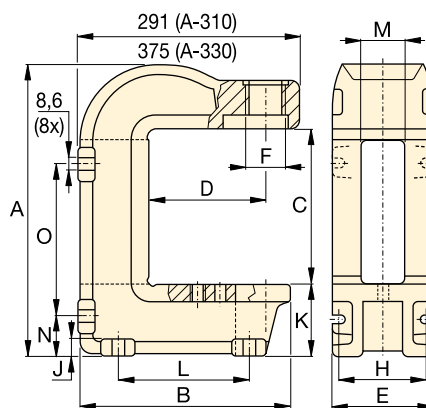


A-205, A-210, A-220



A-310, A-330

| Press Dimensions (mm) | | | | | | | | | | | | | | |  | Press Model Number |
|-----------------------|-----|-----|-----|-----|-------------|----|-----|----|-----|-----|----|----|-----|------|---------------------------------------------------------------------------------------|--------------------|
| A | B | C | D | E | F | G | H | J | K | L | M | N | O | (kg) | | |
| 291 | 203 | 165 | 95 | 73 | 1½" -16 UNS | 26 | 51 | 66 | 25 | - | - | - | - | 7 | A-205 | |
| 406 | 283 | 228 | 152 | 83 | 2¼" -14 UNS | 26 | 76 | 64 | 41 | - | - | - | - | 17 | A-210 | |
| 540 | 346 | 305 | 152 | 121 | 3⅝" -12 UNS | 26 | 95 | 70 | 44 | - | - | - | - | 38 | A-220 | |
| 414 | 281 | 230 | 152 | 135 | 2¼" -14 UNS | 63 | 122 | 19 | 97 | 175 | 65 | 54 | 219 | 27 | A-310 | |
| 557 | 353 | 260 | 152 | 178 | 3⅝" -12 UNS | 63 | 140 | 25 | 165 | 203 | 67 | 98 | 276 | 86 | A-330 | |

| Description | Press Capacity and Press Series | Model Number | | Features |
|----------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| V-Blocks | 10 ton Bench VLP-Presses 25 ton Workshop XLP-Presses 50 ton Workshop XLP-Presses 75 ton XLP- and 100 ton VLP-Presses 200 ton Workshop VLP-Press 200 ton BPR-Roll-Frame Press | VB-10 VB-25 VB-501 VB-101 A-200 A-200R |  | <ul style="list-style-type: none"> Facilitate positioning of pipes and bars All V-Block model numbers include 2 V-blocks. |
| Hydra-Lift | 50 ton BPR-Roll-Frame Press 100 ton BPR-Roll-Frame Press 200 ton BPR-Roll-Frame Press | IPLR-100 IPLR-100 IPLR-200 |  | <ul style="list-style-type: none"> Allows easy, effortless daylight adjustments Includes accessory chain. |
| Hydrajust Bed Positioning | 100 ton Workshop VLP-Presses 200 ton Workshop VLP-Press IMPORTANT! The "Hydrajust" bed positioning is not designed to withstand full cylinder capacity, only to be used for bed adjustment. | VHJ-100 BSS-5380 |  | <ul style="list-style-type: none"> Allowing effortless daylight adjustment by moving the lower bed up and down Can be used with presses equipped with double-acting cylinder. |

▼ PRESS APPLICATION IDEAS



◀ 600 Ton High-Accuracy Collar Press

For production of accelerator coils, sheet metal needs to be formed into a specific shape and size. The end product of this forming is a cylindrical collar, which has a very solid structure, specific shape, and a tight tolerance for circularity and concentricity.

The Enerpac team was consulted to accomplish this task using proven high-pressure technology. The 600-ton press consisted of two separate hydraulic systems. The first system featured eight 25-ton cylinders, to position the sheets, while the second system featured eight 75-ton cylinders, to press the sheets into the correct shape. The results were a hydraulic press system that increased productivity and lowered operating costs.

Fully Automated PLC-Controlled 1800 Ton High-Accuracy Press ▶

The pressing and heating cycle, during the production of magnetic acceleration coils, required high force and high-accuracy to ensure absolute quality.

Enerpac was consulted to assist in the design of a high accuracy production press. Control of the press force is monitored along with the temperature of the coils during forming by a PLC Control System.



Tension Meter and Load Cells

▼ Shown: LH-102 and TM-5 (in middle)



TM LH Series



Capacity:

900 - 90.000 kg

Accuracy, % of full scale:

± 2%



TM and LH models are 100% tested to verify accuracy within a ± 2% range.


If your application requires a calibrated tool, it must be submitted for certification testing. Certification is NOT available from Enerpac.

Tension Meter TM-5


- Accuracy ± 2% of full scale
- Zinc and bronze plated to resist corrosion
- Dual-range readout in kilograms and pounds
- Maximum indicating pointer reading for pre-selected forces or to maintain force readings
- Cushioned metal case provides safe storage and transport.

Load Cells LH-Series

- Accuracy ± 2% of full scale
- Swivel loading pad reduces eccentric loading for improved accuracy
- Maximum indicating pointer reading pre-selected forces or to maintain maximum force readings
- Dual-range readout in kilograms and pounds.

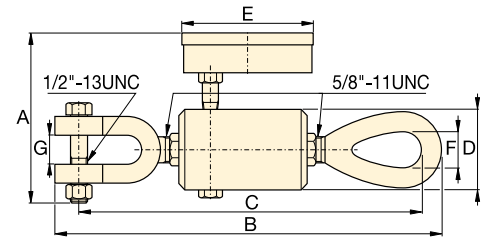

TM-5

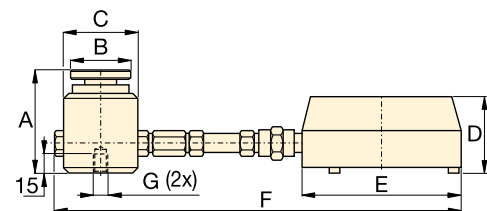

LH-Series

▼ SELECTION CHART

| Type | Gauge Capacity | | Model Number | Minimum Reading | | Gauge Scale Increments | | Dimensions (mm) | | | | | | |
|--------------------------------|----------------|---------|-----------------|-----------------|--------|------------------------|-------|-----------------|-----|-----|----|-----|------|------------------|
| | (kg) | (lbs) | | (kg) | (lbs) | (kg) | (lbs) | A | B | C | D | E | F | G* |
| Direct Mounted | 4.500 | 10.000 | TM-5 | 500 | 1.000 | 100 | 100 | 120 | 247 | 236 | 50 | 93 | 22 | 19 |
| Direct Mounted Load Cell | 900 | 2.000 | LH-10 | 100 | 200 | 20 | 20 | 77 | 44 | 57 | 60 | 101 | 215 | ¼" - 20, 44,5 BC |
| | 4.500 | 10.000 | LH-50 | 500 | 1.000 | 100 | 100 | 77 | 44 | 57 | 60 | 101 | 215 | ¼" - 20, 44,5 BC |
| Remote Mounted with 0,6 m Hose | 900 | 2.000 | LH-102 | 100 | 200 | 20 | 20 | 77 | 44 | 57 | 60 | 147 | 846 | ¼" - 20, 44,5 BC |
| | 4.500 | 10.000 | LH-502 | 500 | 1.000 | 100 | 100 | 77 | 44 | 57 | 60 | 147 | 846 | ¼" - 20, 44,5 BC |
| | 9.000 | 20.000 | LH-1002 | 1.000 | 2.000 | 200 | 200 | 77 | 44 | 57 | 60 | 147 | 846 | ¼" - 20, 44,5 BC |
| Remote Mounted with 1,8 m Hose | 21.000 | 50.000 | LH-2506 | 3.000 | 5.000 | 500 | 500 | 101 | 69 | 85 | 60 | 147 | 2094 | ¾" - 24, 63 BC |
| | 45.000 | 100.000 | LH-5006 | 5.000 | 5.000 | 1.000 | 1.000 | 132 | 101 | 127 | 60 | 147 | 2135 | ¾" - 24, 89 BC |
| | 90.000 | 200.000 | LH-10006 | 10.000 | 10.000 | 1.000 | 2.500 | 158 | 127 | 158 | 60 | 147 | 2166 | ¾" - 24, 102 BC |

* BC = Bolt Circle

Enerpac offers a complete line of pullers with the widest range of sizes, capacities and styles. Whether your application requires mechanical, hydraulic or the patented Posi Lock® system, Enerpac can satisfy your requirements.

Made of high strength steel alloys, you can depend on Enerpac pullers to provide years of trouble-free operation, even in the harshest environments.



Hydraulic Pullers

These hydraulic pullers eliminate time-consuming and unsafe hammering, heating or prying. Damage to parts is minimized through the use of controlled hydraulic power.



Posi Lock® Pullers

The puller that meets the safety challenge. A control cage holds the pulling jaws securely in working position. This patented feature reduces the possibility of the puller jaws slipping off the work surface, thereby increasing productivity and tool life and

reducing dangerous situations for the user. The Posi Lock® feature is available in a mechanical or hydraulic version.



WARNING

Do not exceed 50% of the rated puller capacity when using two jaw configurations, a double crosshead (2 grip arms) or when using puller legs in combination with bearing puller attachments.



CAUTION!

Not all puller components and configurations are rated at the set capacity. Please contact Enerpac for details.



IMPORTANT!

Always wear Safety Goggles and Gloves while using pullers.

Puller Section Overview

When selecting a puller it is important to consider 3 basic specifications:

1. The Capacity:

is the amount of force the puller is capable of producing.

Typically, the capacity required for a job can be determined by using the shaft diameter of the part being pulled.

For manual pullers, the center bolt diameter of the puller should be at least half the diameter of the shaft being pulled from.

For hydraulic pullers, the capacity in tons should be 0,28 to 0,4 times the shaft diameter in mm. Use the following chart:

















| Shaft Diameter | Puller Capacity |
|----------------|-----------------|
| 0 - 25 mm | 13 ton |
| 25 - 50 mm | 22 ton |
| 50 - 89 mm | 33 ton |
| 89 - 140 mm | 45 ton |

2. The Reach:

is the distance between the bottom of the base and the jaw flats. The puller's reach must equal or exceed the same distance of the part being pulled.

3. The Spread:

is the distance between the jaws. The puller's spread needs to be greater than the width of the part being pulled.

| Puller Function | Capacity ton | Puller Type | Series | Page |
|-------------------------------------------------------------------------------------|--------------|----------------------------------------------------------------------------------------------|-------------------------------------------------------|----------------------------------------------------------------------------------------------------|
|  | 13-45 | Master Puller Sets Max. Reach: 252 - 700 mm Max. Spread: 247 - 1100 mm | BHP |  150 ▶ |
|  | 13-45 | Grip Puller Sets Max. Reach: 252 - 700 mm Max. Spread: 249 - 1100 mm | BHP |  151 ▶ |
|  | 6-22 | Cross Bearing Puller Sets Max. Reach: 357 - 864 mm Max. Spread: 260 - 580 mm | BHP |  152 ▶ |
|  | 6-22 | Bearing Cup Pullers Max. Reach: 115 - 150 mm Max. Spread: 145 - 240 mm | BHP |  153 ▶ |
|  | 6-22 | Bearing Separators Max. Width: 110 - 260 mm Max. Spread: 110 - 250 mm | BHP |  153 ▶ |
|  | 2-40 | Posi Lock® Mechanical Pullers Max. Reach: 101 - 355 mm Max. Spread: 12 - 635 mm | EP EPP EPX EPPMI |  154 ▶ |
|  | 10-50 | Posi Lock® Hydraulic Pullers Max. Reach: 203 - 355 mm Max. Spread: 304 - 635 mm | EPH EPHR EPHS |  158 ▶ |
|  | 100 | Posi Lock® Hydraulic Pullers Max. Reach: 1219 mm Max. Spread: 190 - 1778 mm | EPH |  161 ▶ |

▼ Shown: Master Puller Set BHP-3751G



Multi Purpose Puller Set



WARNING


Do not exceed 50% of the rated puller capacity when using two jaw configurations, a double crosshead (2 grip arms) or when using puller legs in combination with bearing puller attachments.

- Supplied with a full hydraulic set including pump, hose, cylinder, gauge, gauge adaptor and wooden case
- High quality, forged steel components provide superior reliability and service
- Sets include speed crank and adjusting screw for fast contact to work before hydraulics are applied
- All Master Puller Sets include a Grip Puller, a Cross Bearing Puller, a Bearing Cup Puller and a Bearing Separator, which can be ordered separately, see items nr. 10, 20, 30 and 40.

▼ Maintenance engineers throughout the industry greatly appreciate the Enerpac Master Puller sets



▼ SELECTION CHART

| Master Puller Set Capacity * | | 13 ton | 22 ton | 33 ton | 45 ton ** | Page: |
|--------------------------------|--------------|------------------------|-----------|-----------|-----------|---------------------------------------------------------------------------------------|
| Model Number ▶ | | BHP-1752 ¹⁾ | BHP-2751G | BHP-3751G | BHP-5751G |  |
| Included Hydraulics | Set Weight ▶ | 37 kg | 90 kg | 172 kg | 298 kg | |
| • Hand Pump | | P-142 | P-392 | P-392 | P-80 | |
| • Cylinder | | RWH-121 | RCH-202 | RCH-302 | RCH-603 | 30 ▶ |
| • Saddle | | – | HP-2015 | HP-3015 | HP-5016 | 31 ▶ |
| • Hose | | HB-7206QB | HC-7206 | HC-7206 | HC-7206 | 122 ▶ |
| • Gauge | | GF-120B | GF-813B | GF-813B | GF-813B | 128 ▶ |
| • Gauge Adaptor | | GA-4 | GA-3 | GA-3 | GA-3 | 135 ▶ |
| Included Pullers | | | | | | |
| 10 Grip Puller | | BHP-1762 | BHP-252 | BHP-352 | BHP-552 | 151 ▶ |
| 20 Cross Bearing Puller | | BHP-1772 | BHP-262 | BHP-362 | BHP-562 | 152 ▶ |
| 30 Bearing Cup Puller | | BHP-180 | BHP-280 | BHP-380 | BHP-580 | 153 ▶ |
| 40 Bearing Separator | | BHP-181 | BHP-282 | BHP-382 | BHP-582 | 153 ▶ |
| • Case | | CM-6 | CW-350 | CW-350 | CW-750 | |

* See warning on this page.

** Puller capacity at 540 bar; maximum cylinder capacity at 700 bar is 60 ton.

¹⁾ Includes Adaptor FZ-1630.

▼ Shown: Grip Puller Set BHP-351G



- Precise hydraulic control allows fast, efficient and safe pulling
- High quality, forged steel components provide superior reliability and service
- Available with and without full hydraulic set.

BHP Series



Capacity:

13, 22, 33 and 45 ton

Reach:

252 - 700 mm

Spread:

249 - 1100 mm

Maximum Operating Pressure:

700 bar

Ordering Example

Model Number BHP-251G:

includes Grip Puller BHP-252 and a full hydraulic set. (Hand pump, cylinder, saddle, hose, gauge and gauge adaptor).

Model Number BHP-252:

includes Grip Puller mechanical parts only, for use with your existing hydraulics.

▼ SELECTION CHART

| Grip Puller Set Capacity ** | | 13 ton | 22 ton | 33 ton | 45 ton *** |
|----------------------------------|----------------------------|-----------------------|------------|-------------|---------------|
| Model Number ► | | BHP-152 ¹⁾ | BHP-251G | BHP-351G | BHP-551G |
| Included Hydraulics Set Weight ► | | 22 kg | 56 kg | 91 kg | 160 kg |
| • Hand Pump | | P-142 | P-392 | P-392 | P-80 |
| • Cylinder | | RWH-121 | RCH-202 | RCH-302 | RCH-603 |
| • Saddle | | - | HP-2015 | HP-3015 | HP-5016 |
| • Hose | | HB-7206QB | HC-7206 | HC-7206 | HC-7206 |
| • Gauge | | GF-120B | GF-813B | GF-813B | GF-813B |
| • Gauge Adaptor | | GA-4 | GA-3 | GA-3 | GA-3 |
| 10 | Grip Puller Model Number ► | BHP-1762 * | BHP-252 * | BHP-352 * | BHP-552 * |
| Maximum Spread (mm) | 2-jaw | 249 | 400 | 593 | 899 |
| | 3-jaw | 249 | 499 | 800 | 1100 |
| Maximum Reach (mm) | 2-jaw | 252 | 300 | 387 | 700 |
| | 3-jaw | 252 | 300 | 387 | 700 |
| Jaw (mm) | Thickness | 15 | 20 | 24 | 30 |
| | Width | 23 | 27 | 38 | 39 |
| Adjusting Screw (mm) | Thread | ¾" - 16 UNF | 1" - 8 UNC | 1¼" - 7 UNC | 1½" - 5.5 UNS |
| | Length | 400 | 670 | 790 | 975 |
| • Case | | CW-166 | CW-166 | CW-350 | CW-750 |

¹⁾ Includes Adaptor FZ-1630.

* Grip Puller order number without hydraulics.

** See warning on page 150.

*** Puller capacity at 540 bar; maximum cylinder capacity at 700 bar is 60 ton.

BHP-Series, Cross Bearing Puller Sets

▼ Shown: Cross Bearing Puller Set BHP-361G



- Precise hydraulic control allows fast, efficient and safe pulling
- High quality, forged steel components provide superior reliability and service.

BHP Series



Capacity:

6, 11, 16 and 22 ton

Reach:

357 - 864 mm

Spread:

260 - 580 mm

Maximum Operating Pressure:

350 bar



The cross bearing puller without hydraulics, bearing cup puller and a bearing separator can be ordered separately, see items nr. 10, 20, 30 and 40.

▼ SELECTION CHART

| Cross Bearing Puller Set Capacity | | 6 ton | 11 ton | 16 ton | 22 ton | |
|-----------------------------------|-------------------------------------------|------------------------------|-----------------|-----------------|------------------|----------------|
| | Model Number ▶ | BHP-162 ¹⁾ | BHP-261G | BHP-361G | BHP-561G | |
| | Set Weight ▶ | 26 kg | 62 kg | 121 kg | 185 kg | |
| Included Hydraulics | | | | | | |
| • Hand Pump | | P-142 | P-392 | P-392 | P-80 | |
| • Cylinder | | RWH-121 | RCH-202 | RCH-302 | RCH-603 | |
| • Saddle | | – | HP-2015 | HP-3015 | HP-5016 | |
| • Hose | | HB-7206QB | HC-7206 | HC-7206 | HC-7206 | |
| • Gauge | | GF-120B | GF-813B | GF-813B | GF-813B | |
| • Gauge Adaptor | | GA-4 | GA-3 | GA-3 | GA-3 | |
| 20 | Cross Bearing Puller ²⁾ | Model Number ▶ | BHP-1772 | BHP-262 | BHP-362 | BHP-562 |
| Spread (mm) | Maximum | 260 | 345 | 440 | 580 | |
| | Minimum | 115 | 140 | 180 | 220 | |
| Reach (mm) | Maximum | 357 | 570 | 710 | 864 | |
| Adjusting Screw (mm) | Diameter | 3/4" - 16 UNF | 1" - 8 UNC | 1 1/4" - 7 UNC | 1 5/8" - 5.5 UNS | |
| | Length | 400 | 675 | 795 | 975 | |
| Leg (mm) | Length | 105 | 239 | 203 | 609 | |
| | Length | 357 | 419 | 457 | 863 | |
| | Length | – | 571 | 711 | – | |
| | Length | – | 114 | – | – | |
| Upper Leg Ends (mm) | Thread | 3/4" - 16 UNF | 3/4" - 16 UNF | 1-14 UNS | 1 1/4" - 12 UNF | |
| Lower Leg Ends (mm) | Thread | 5/8" - 18 UNF | 5/8" - 18 UNF | 1-14 UNS | 1 1/4" - 12 UNF | |
| 30 | Bearing Cup Puller ²⁾ | Model Number ▶ | BHP-180 | BHP-280 | BHP-380 | BHP-580 |
| 40 | Bearing Separator ²⁾ | Model Number ▶ | BHP-181 | BHP-282 | BHP-382 | BHP-582 |
| • Wooden Case | | | CM-6 | CW-187 | CW-350 | CW-750 |

¹⁾ Includes Adaptor FZ-1630.

²⁾ Can be ordered separately without hydraulic components, see next page.

Bearing Cup Pullers and Bearing Separators

▼ Shown: BHP-380



Bearing Cup Puller

- Made of high strength steel alloy
- Easily adapted to Cross Bearing Pullers for fast and efficient removal of the most difficult parts
- Adjustable to fit a variety of bearings and seals.

BHP Series



Capacity:

6, 11, 16 and 22 ton

Maximum Reach:

115 - 150 mm

Spread Range:

145 - 240 mm

Maximum Operating Pressure:

350 bar

▼ SELECTION CHART

| Capacity * | | 6 ton | 11 ton | 16 ton | 22 ton |
|------------------------------|--------|---------------|------------|----------------|------------------|
| 30 Bearing Cup Puller | | | | | |
| Model Number ▶ | | BHP-180 | BHP-280 | BHP-380 | BHP-580 |
| Spread (mm) | Max. | 145 | 160 | 240 | 240 |
| | Min. | 40 | 32 | 60 | 60 |
| Reach (mm) | Max. | 115 | 140 | 150 | 150 |
| Center Screw | Thread | 3/4" - 16 UNF | 1" - 8 UNC | 1 1/4" - 7 UNC | 1 5/8" - 5.5 UNS |

* Puller capacity, not attachment capacity. See warning on this page.



WARNING


Do not exceed 50% of the rated puller capacity when using a double crosshead (2 grip arms) or when using puller legs in combination with bearing puller attachments.

▼ Shown: BHP-382




Bearing Separator

- Made of high strength steel alloy
- Wedge-shaped edges allow removal of the most hard-to-grip components
- Easily adapted to Cross Bearing Pullers for fast and efficient removal of the most difficult parts.

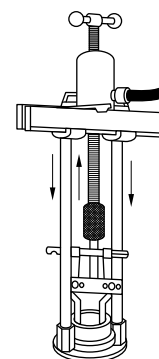

◀ Bearing Cup Puller shown with Crosshead Puller Attachment.



Bearing Separator shown with Crosshead Puller Attachment. ▶

▼ SELECTION CHART

| Capacity * | | 6 ton | 11 ton | 16 ton | 22 ton |
|--------------------------|------|---------------|---------------|-------------|-----------------|
| 40 Bearing Puller | | | | | |
| Model Number ▶ | | BHP-181 | BHP-282 | BHP-382 | BHP-582 |
| Spread (mm) | Max. | 110 | 134 | 250 | 250 |
| | Min. | 10 | 12 | 17 | 17 |
| Width (mm) | | 110 | 155 | 260 | 260 |
| Thread | | 5/8" - 18 UNF | 3/4" - 18 UNF | 1" - 14 UNS | 1 1/4" - 12 UNF |

* Bearing Separator rated at 50% of puller capacity. See warning on this page.



Bearing Separator

Bearing Separator has wedge shaped edges for placing puller behind hard to reach bearings, gears, etc., where clearance prevents direct application of grip puller arms.

The Bearing Separator can be used with the Cross Bearing Puller or the Grip Puller.

▼ Shown from left to right: EP-206, EP-108



- Patented 'Safety Cage' jaw retention system
- Roll threaded shafts for less effort when applying high torque
- Slim tapered jaws for improved gripping in tight spots
- Available in 2 and 3 jaw design and inside and outside pulling configuration
- More efficient pulling, as one man can do the job where manual pullers often require two operators.



For Safer and Faster Pulling



Long Jaws

Long Jaws are used to increase the reach and spread of manual pullers. They maintain the same pulling capacity as the standard jaws, but reduce clamping force by 25%.

Page: 157



Shaft Attachments

Shaft protectors and extenders are live centers that fit over the standard puller shaft for tip protection and additional reach.

Page: 157




Application Tip

Because of the unique safety cage design, Posi Lock® pullers will grip on surfaces where normal pullers would slip off; e.g. tapered bearings.

◀ Positioning an EP-104, 3-jaw puller on the drive pulley of an electric motor.

Posi Lock® Mechanical Grip Pullers

External Posi Lock® Pullers

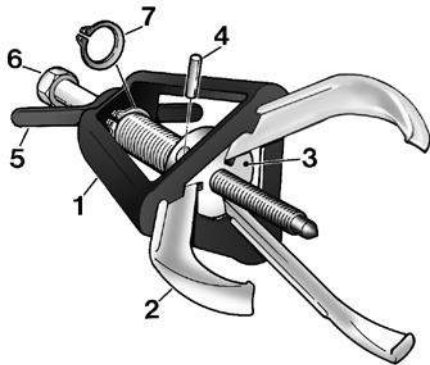

- 1 Patented 'Safety Cage' guides jaws, holding them securely onto the part.
- 2 Durable forged jaws provide positive grip.
- 3 Jaw head provides pivot and reaction point for jaws.
- 4 Pin, for easy jaw removal and replacement.
- 5 T-handle provides control of the puller jaws.
- 6 Drive bolt with rolled threads for increased force with reduced input torque.
- 7 Snap-ring retains cage to drive bolt and provides quick removal for easy service.

EP EPP Series



Capacity:

2 - 40 ton

Maximum Reach:


101 - 355 mm

Spread Range:

12 - 635 mm

▼ QUICK SELECTION CHART EXTERNAL PULLERS


For quick technical information see next page.

| Number of Jaws | Maximum Reach (mm) | Spread (min. - max.) (mm) | Capacity ton (kN) | Model Number | Center Bolt Diameter (mm) |  (kg) |
|----------------|-----------------------|---------------------------------|----------------------|---------------|------------------------------|-------------------------------------------------------------------------------------------|
| 2 | 101 | 12 - 127 | 2 (17) | EP-204 | 14 | 1,4 |
| 3 | 101 | 12 - 127 | 5 (45) | EP-104 | 14 | 1,8 |
| 2 | 152 | 12 - 178 | 6 (53) | EP-206 | 16 | 3,2 |
| 3 | 152 | 12 - 178 | 10 (89) | EP-106 | 16 | 3,6 |
| 2 | 203 | 19 - 304 | 12 (106) | EP-208 | 20 | 5,4 |
| 3 | 203 | 19 - 304 | 17 (151) | EP-108 | 20 | 6,4 |
| 2 | 245 | 25 - 381 | 14 (124) | EP-210 | 20 | 5,9 |
| 3 | 245 | 25 - 381 | 20 (178) | EP-110 | 20 | 7,3 |
| 2 | 304 | 63 - 457 | 25 (222) | EP-213 | 29 | 17,2 |
| 3 | 304 | 63 - 457 | 30 (267) | EP-113 | 29 | 20,0 |
| 2 | 355 | 76 - 635 | 35 (311) | EP-216 | 31 | 25,8 |
| 3 | 355 | 76 - 635 | 40 (356) | EP-116 | 31 | 30,8 |



IMPORTANT!

Always wear Safety Goggles and Gloves while using pullers.



Application Tip


In determining the correct manual puller capacity for your application, use the following rule:

The center bolt diameter of the puller should be at least ½ the diameter of the shaft being pulled on.


Example:

A part being pulled from a shaft with a diameter of 38 mm would require a puller with a center bolt diameter of at least 19 mm.


Internal Posi Lock® Puller

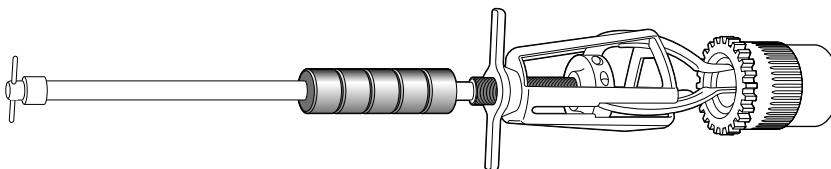


▼ QUICK SELECTION CHART INTERNAL PULLERS

| Number of Jaws | Maximum Reach (mm) | Spread (min. - max.) (mm) | Jaw Style | Model Number | Jaw Length (mm) |  (kg) |
|----------------|-----------------------|---------------------------------|------------|----------------|--------------------|---------------------------------------------------------------------------------------------|
| 3 | 168 | 14 - 101 | Standard * | EPPMI-6 | 168 | 3,9 |
| | 218 | 25 - 133 | Long * | | 218 | 3,9 |

* Both Standard and Long Jaws are included with EPPMI-6.

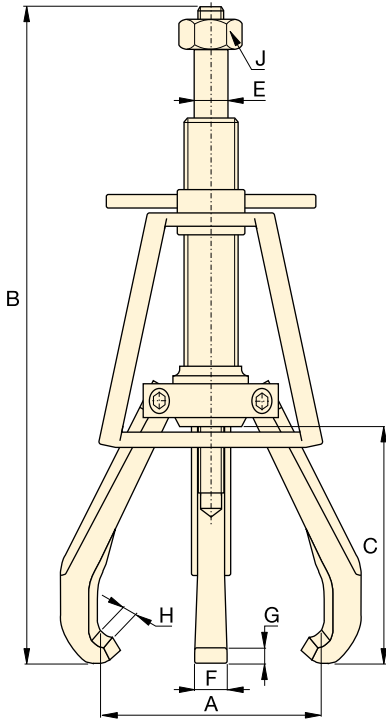

**2 and 3 Jaw External Puller
EP-Series**

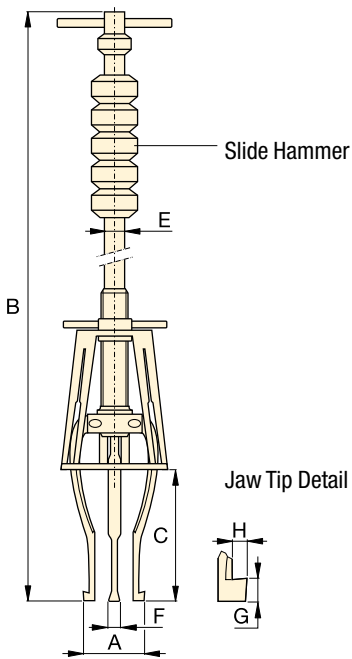

**Internal Puller
EPPMI-6**



▲ EP-204 2 jaw puller positioned to pull a water pump drive pulley.

▼ **QUICK SELECTION CHART EXTERNAL PULLERS**

| Number of Jaws | Maximum Reach (mm) | Spread min. - max. (mm) | Capacity ton (kN) | Model Number | Center Bolt Diameter (mm) | Maximum Torque (Nm) |
|----------------|-----------------------|----------------------------|----------------------|--------------|------------------------------|------------------------|
| 2 | 101 | 12 - 127 | 2 (17) | EP-204 | 14 | 27 |
| 3 | 101 | 12 - 127 | 5 (45) | EP-104 | 14 | 54 |
| 2 | 152 | 12 - 178 | 6 (53) | EP-206 | 16 | 102 |
| 3 | 152 | 12 - 178 | 10 (89) | EP-106 | 16 | 176 |
| 2 | 203 | 19 - 304 | 12 (106) | EP-208 | 20 | 203 |
| 3 | 203 | 19 - 304 | 17 (151) | EP-108 | 20 | 298 |
| 2 | 245 | 25 - 381 | 14 (124) | EP-210 | 20 | 237 |
| 3 | 245 | 25 - 381 | 20 (178) | EP-110 | 20 | 373 |
| 2 | 304 | 63 - 457 | 25 (222) | EP-213 | 29 | 644 |
| 3 | 304 | 63 - 457 | 30 (267) | EP-113 | 29 | 814 |
| 2 | 355 | 76 - 635 | 35 (311) | EP-216 | 31 | 1085 |
| 3 | 355 | 76 - 635 | 40 (356) | EP-116 | 31 | 1153 |

▼ **QUICK SELECTION CHART INTERNAL PULLERS**

| Number of Jaws | Maximum Reach (mm) | Spread min. - max. (mm) | Jaw Style | Model Number | Jaw Length (mm) | Slide-hammer weight (kg) |
|----------------|-----------------------|----------------------------|------------|--------------|--------------------|-----------------------------|
| 3 | 168 | 14 - 101 | Standard * | EPPMI-6 | 168 | 1,1 |
| | 218 | 25 - 133 | Long * | | 218 | 1,1 |

* Both Standard and Long Jaws are included with EPPMI-6.

Posi Lock® Mechanical Pullers



Shaft Attachments

Shaft protectors and extenders are live centers that fit over the standard puller shaft for tip protection and additional reach.



Long Jaws

Long Jaws are used to increase the reach and spread of pullers. They maintain the same pulling capacity as the standard jaws, but reduce clamping force by 25%.

EP EPP Series



Capacity:

2 - 40 ton

Maximum Reach:

101 - 355 mm

Spread Range:

12 - 635 mm




▼ SHAFT ATTACHMENTS

| Length (mm) | Dia- meter (mm) | Increases Center Bolt Length (mm) | Model Number |
|----------------|-----------------------|--------------------------------------------|-----------------|
| 25 | 19 | 9 | EPP-4 |
| 50 | 19 | 38 | EPX-4 |
| 31 | 22 | 12 | EPP-6 |
| 50 | 22 | 38 | EPX-6 |
| 31 | 25 | 12 | EPP-10 |
| 50 | 25 | 38 | EPX-10 |
| 50 | 35 | 21 | EPP-1316 |

▼ LONG JAWS

| Spread min. - max. (mm) | Max. Reach (mm) | Model Number |
|-------------------------------|-----------------------|-------------------|
| 57 - 381 | 245 | EP-11054 |
| 38 - 558 | 400 | EP-11054L |
| 38 - 762 | 508 | EP-11354L |
| 25 - 133 | 218 | EP-10554L* |

* for EPPMI-6 only

| Dimensions (mm) | | | | | | | | | Model Number | Optional Accessories | | |
|--------------------------------|----------------------------|------------------------|----------------------------------|-----------------------|---------------------------|-----------------------|--------------------------------------|---------------|-----------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| Spread min. - max. A | Overall Length B | Max. Reach C | Center Bolt Diam. E | Jaw Width F | Tip Clearance G | Tip Depth H | Hex Socket Size (inch) J | | |  |  |  |
| 12 - 127 | 245 - 323 | 101 | 14 | 15 | 4,1 | 4,6 | 7/8 | EP-204 | EPP-4 | EPX-4 | - | |
| 12 - 127 | 245 - 323 | 101 | 14 | 15 | 4,1 | 4,6 | 7/8 | EP-104 | EPP-4 | EPX-4 | - | |
| 12 - 178 | 323 - 476 | 152 | 16 | 19 | 8,1 | 6,1 | 1 1/16 | EP-206 | EPP-6 | EPX-6 | - | |
| 12 - 178 | 323 - 476 | 152 | 16 | 19 | 8,1 | 6,1 | 1 1/16 | EP-106 | EPP-6 | EPX-6 | - | |
| 19 - 304 | 412 - 615 | 203 | 20 | 22 | 6,4 | 9,1 | 1 1/4 | EP-208 | EPP-10 | EPX-10 | EP-11054 | |
| 19 - 304 | 412 - 615 | 203 | 20 | 22 | 6,4 | 9,1 | 1 1/4 | EP-108 | EPP-10 | EPX-10 | EP-11054 | |
| 25 - 381 | 489 - 736 | 245 | 20 | 25 | 6,4 | 9,1 | 1 1/4 | EP-210 | EPP-10 | EPX-10 | EP-11054L | |
| 25 - 381 | 489 - 736 | 245 | 20 | 25 | 6,4 | 9,1 | 1 1/4 | EP-110 | EPP-10 | EPX-10 | EP-11054L | |
| 63 - 457 | 660 - 965 | 304 | 29 | 31 | 12,7 | 9,7 | 1 11/16 | EP-213 | EPP-1316 | - | EP-11354L | |
| 63 - 457 | 660 - 965 | 304 | 29 | 31 | 12,7 | 9,7 | 1 11/16 | EP-113 | EPP-1316 | - | EP-11354L | |
| 76 - 635 | 800 - 1155 | 355 | 31 | 36 | 13,5 | 11,7 | 1 13/16 | EP-216 | EPP-1316 | - | - | |
| 76 - 635 | 800 - 1155 | 355 | 31 | 36 | 13,5 | 11,7 | 1 13/16 | EP-116 | EPP-1316 | - | - | |

Note: Overall length (B) is dependent on position of center bolt.

| Dimensions (mm) | | | | | | | Model Number |
|----------------------------|------------------------|--------------------|------------------------|-------------------|-----------------------|-------------------|-----------------|
| Spread min. - max. A | Overall Length B | Max. Reach C | Slide Rod Dia. E | Jaw Width F | Tip Clearance G | Tip Depth H | |
| 14 - 101 | 736 | 168 | 14,2 | 8 | 3,0 | 1,5 | EPPMI-6 |
| 25 - 133 | 787 | 218 | 14,2 | 8 | 7,6 | 4,6 | |



Always wear Safety Goggles and Gloves while using pullers.

▼ Shown: EPHR-110



- Patented 'Safety Cage' jaw retention system
- High force hydraulic system for effortless pulling of large components
- Slim tapered jaws for better gripping in tight spots
- Available in 2 and 3 jaw design
- More efficient pulling, as one man can do the job where manual pullers often require two operators.

High-Tech Pulling



Transport and Store

Conveniently stores and transports hydraulic pullers and accessories. Order the **EPT-2550** Storage Cart and make your job easier to do!



Long Jaws

Used to increase the reach and spread of pullers. They maintain the same pulling capacity as the standard jaws, but reduce clamping force by 25%.

Page: **160**



Application Tip

Because of the unique safety cage design, Posi Lock® pullers will grip on surfaces where normal pullers would slip off; e.g. tapered bearings.

▼ An EPH-113 hydraulic Posi Lock® puller easily removes machined parts from a heavy-production press.




▼ SELECTION CHART

| Number of Jaws | Maximum Spread (mm) | Capacity ton (kN) | Model Number * |
|----------------|------------------------|----------------------|----------------|
| 2 | 304 | 10 (101) | EPH-208 |
| 3 | 304 | | EPH-108 |
| 2 | 381 | 15 (142) | EPH-210 |
| 3 | 381 | | EPH-110 |
| 2 | 457 | 25 (232) | EPH-213 |
| 3 | 457 | | EPH-113 |
| 2 | 635 | 50 (498) | EPH-216 |
| 3 | 635 | | EPH-116 |


* Cylinder is not included.

Posi Lock® Hydraulic Grip Pullers

▼ SETS SELECTION CHART

| Style | Capacity (ton) | Basic Puller | Cylinder | Stroke (mm) | Pump Set | Set Model Number ** |  (kg) |
|--------------|----------------|--------------|----------|-------------|----------|---------------------|----------------------------------------------------------------------------------------|
| 2 Jaw Puller | 10 | EPH-208 | RC-106 | 152 | - | EPHR208 | 10 |
| | 10 | EPH-208 | RC-106 | 152 | EP-1E | EPHS208E | 27 |
| | 15 | EPH-210 | RC-1510 | 254 | - | EPHR210 | 22 |
| | 15 | EPH-210 | RC-1510 | 254 | EP-1E | EPHS210E | 38 |
| | 25 | EPH-213 | RC-2514 | 362 | - | EPHR213 | 44 |
| | 25 | EPH-213 | RC-2514 | 362 | EP-1E | EPHS213E | 53 |
| | 50 | EPH-216 | RC-5013 | 336 | - | EPHR216 | 87 |
| | 50 | EPH-216 | RC-5013 | 336 | EP-2E | EPHS216E | 123 |
| 3 Jaw Puller | 10 | EPH-108 | RC-106 | 152 | - | EPHR108 | 11 |
| | 10 | EPH-108 | RC-106 | 152 | EP-1E | EPHS108E | 28 |
| | 15 | EPH-110 | RC-1510 | 254 | - | EPHR110 | 23 |
| | 15 | EPH-110 | RC-1510 | 254 | EP-1E | EPHS110E | 39 |
| | 25 | EPH-113 | RC-2514 | 362 | - | EPHR113 | 48 |
| | 25 | EPH-113 | RC-2514 | 362 | EP-1E | EPHS113E | 57 |
| | 50 | EPH-116 | RC-5013 | 336 | - | EPHR116 | 91 |
| | 50 | EPH-116 | RC-5013 | 336 | EP-2E | EPHS116E | 127 |

** Standard set EPHS models shipped with 230 VAC pump.

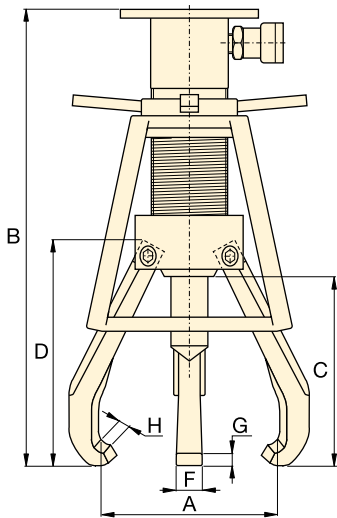

EPH Series



Capacity:

10 - 50 ton

Maximum Reach:


203 - 355 mm

Spread Range:

19 - 635 mm

Maximum Operating Pressure:

700 bar






Pump Sets


All Posi Lock® Hydraulic Puller Sets that include 230 VAC pumps, will feature the following components:

| | EP-1E Pump Set | EP-2E Pump Set |
|---------|----------------|----------------|
| Pump | PUJ-1200E | ZE4210ME |
| Hose | HC-7210 | HC-7210 |
| Gauge | G-2535L | G-2535L |
| Adaptor | GA-3 | GA-3 |




Components for 115 VAC pumps are available on request.

Accessories (see next page for details)

| Standard included | Standard included | Optional |
|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|  |  |  |
| Ram Point Sets | Lift Plates | Long Jaws |
| 19 - 304 | EPH-155 | EPH-11052 |
| 19 - 304 | EPH-155 | EPH-11052 |
| 25 - 381 | EPH-155 | EPH-11052 |
| 25 - 381 | EPH-155 | EPH-11052 |
| 63 - 457 | EPH-257 | EPH-11352 |
| 63 - 457 | EPH-257 | EPH-11352 |
| 76 - 635 | EPH-508 | EPH-11652 |
| 76 - 635 | EPH-508 | EPH-11652 |

| Dimensions (mm) | | | | | | |  | Model Number * |
|--------------------|----------------|---------------|------------|-----------|---------------|-----------|-------------------------------------------------------------------------------------|----------------|
| Spread min. - max. | Overall Length | Maximum Reach | Jaw Length | Jaw Width | Tip Clearance | Tip Depth | (kg) | |
| A | B | C | D | F | G | H | | |
| 19 - 304 | 498 | 203 | 237 | 22 | 7,4 | 6,9 | 6,4 | EPH-208 |
| 19 - 304 | 498 | 203 | 237 | 22 | 7,4 | 6,9 | 7,3 | EPH-108 |
| 25 - 381 | 665 | 245 | 270 | 25 | 11,2 | 9,1 | 10,0 | EPH-210 |
| 25 - 381 | 665 | 245 | 270 | 25 | 11,2 | 9,1 | 11,3 | EPH-110 |
| 63 - 457 | 846 | 304 | 348 | 31 | 12,9 | 9,7 | 21,3 | EPH-213 |
| 63 - 457 | 846 | 304 | 348 | 31 | 12,9 | 9,7 | 25,0 | EPH-113 |
| 76 - 635 | 919 | 355 | 413 | 36 | 15,0 | 11,7 | 40,8 | EPH-216 |
| 76 - 635 | 919 | 355 | 413 | 36 | 15,0 | 11,7 | 45,4 | EPH-116 |

▼ RAM POINT SETS SELECTION CHART

| Fits Puller Set Model Number | EPH-208, EPH-210 EPH-108, EPH-110 | EPH-213 EPH-113 | EPH-216 EPH-116 |
|------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|
| |  |  |  |
| Ram Point Set ¹⁾ Model Number | EPH-155 | EPH-257 | EPH-508 |
| Ram Points Included: | Ram Point Dimensions Diameter x Length (mm) | | |
| Flat Ram Points | ø25 x 25 | ø38 x 57 | ø51 x 76 |
| | ø25 x 76 | ø51 x 57 | ø70 x 76 |
| | – | ø51 x 102 | ø70 x 127 |
| Tapered Ram Points | ø25 x 38 | ø38 x 64 | ø51 x 95 |
| | ø25 x 89 | ø51 x 64 | ø51 x 95 |
| | – | ø51 x 114 | ø70 x 140 |
| Ram Point Adaptor | – | – | ø70 x 57 |

¹⁾ Standard included in EPH-Series Posi Lock Pullers.

EPH Series



Capacity:

10 - 50 ton

Maximum Reach:

246 - 508 mm

Spread Range:


57 - 762 mm



IMPORTANT!



Always wear Safety Goggles and Gloves while using pullers.

▼ LIFT PLATE SELECTION CHART

| Fits Puller Set Model Number | Model Number * | Thick-ness (mm) | Dia-meter (mm) |  |
|------------------------------|----------------|--------------------|-------------------|-------------------------------------------------------------------------------------|
| EPH-208 | EPH-11052 | 6,4 | ø153 | |
| EPH-108 | EPH-11052 | 6,4 | ø153 | |
| EPH-210 | EPH-11052 | 6,4 | ø153 | |
| EPH-110 | EPH-11052 | 6,4 | ø153 | |
| EPH-213 | EPH-11352 | 9,7 | ø203 | |
| EPH-113 | EPH-11352 | 9,7 | ø203 | |
| EPH-216 | EPH-11652 | 9,7 | ø254 | |
| EPH-116 | EPH-11652 | 9,7 | ø254 | |

* Mounting screws included. Lifting plates are standard included with EPH-Series Pullers.

▼ LONG JAW SELECTION CHART


| Fits Puller Set Model Number | Model Number | Number of Jaws required | Spread (mm) | Reach (mm) |  (kg) |  | Used to increase the reach and spread of pullers. They maintain the same pulling capacity as the standard jaws, but reduce clamping force by 25%. |
|------------------------------|--------------|-------------------------|----------------|---------------|---------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------|
| EPH-208 | EP-11054 | 2 | 57 - 381 | 246 | 1,1 | | |
| EPH-108 | EP-11054 | 3 | 57 - 381 | 246 | 1,1 | | |
| EPH-210 | EPH-11054L | 2 | 38 - 559 | 401 | 2,5 | | |
| EPH-110 | EPH-11054L | 3 | 38 - 559 | 401 | 2,5 | | |
| EPH-213 | EPH-11354L | 2 | 38 - 762 | 508 | 4,8 | | |
| EPH-113 | EPH-11354L | 3 | 38 - 762 | 508 | 4,8 | | |

Posi Lock® 100 Ton Hydraulic Grip Pullers

▼ EPH-1003E



- Roller cart with power lift
- Hydraulically actuated lift cylinder on cart extends puller from ground to a height of 1,69 m
- Adjustable jaw tips
- Includes ZE3-Series 230 Volt electric one stage pump with remote pendant for fingertip control of the removal process

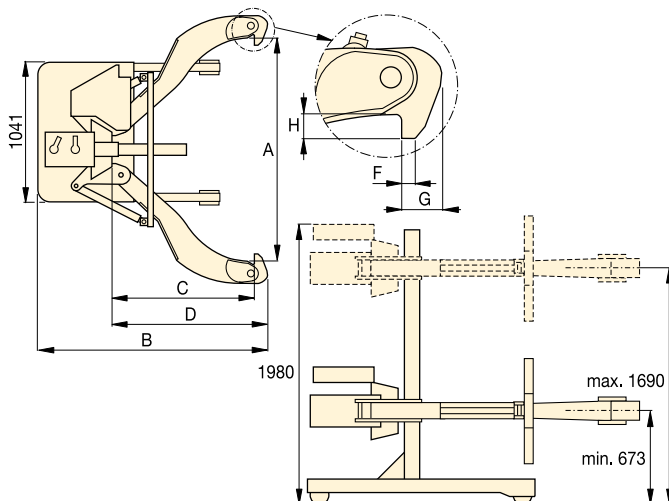

EPH Series




Capacity:
100 ton

Maximum Reach:
1219 mm

Spread Range:
190 - 1778 mm

Maximum Operating Pressure:
700 bar




Pushing Adaptors

All Posi Lock® 100 Ton Hydraulic Pullers include following pushing adaptors.

| Diameter (mm) | Length (mm) | Model Number |
|---------------|-------------|--------------|
| 89 | 737 | EPHT-1162 |
| 89 | 483 | EPHT-1163 |
| 89 | 229 | EPHT-1164 |

▼ The EPH-1002E quickly and easily removes this drive coupler from its shaft.




| Number of Jaws | Spread Range A (mm) | Capacity ton (kN) | Model Number | Cylinder Stroke (mm) | Overall Length B (mm) | Reach C (mm) | Jaw Length D (mm) | Jaw Width F (mm) | Tip Clearance G (mm) | Tip Depth H (mm) |  (kg) |
|----------------|---------------------|-------------------|--------------|----------------------|-----------------------|--------------|-------------------|------------------|----------------------|------------------|--------------------------------------------------------------------------------------------|
| 2 | 190 - 1778 | 100 (980) | EPH-1002E | 250 | 1955 | 1219 | 1346 | 32 | 89 | 89 | 771 |
| 3 | 190 - 1778 | 100 (980) | EPH-1003E | 250 | 1955 | 1219 | 1346 | 32 | 89 | 89 | 907 |

Enerpac offers an extensive range of dedicated tools for a variety of specific and flexible applications.

Whatever your requirement... cutting, punching, spreading or bending... you can be sure that Enerpac has the correct tool to do your job safely and efficiently.

Featuring maintenance sets, machine lifts and load skates, as well as hole punches, pipe benders and cable cutters, Enerpac has the tools to ensure that even your most demanding applications can be undertaken with the highest degree of safety and accuracy.



Tool-Pump Sets

Most hydraulic tools in this section are available in sets, for a perfect tool-pump match.



Hydraulic System Set-up

Check out our 'Yellow Pages' section for help on system set-ups and valving configurations.

Page: 268













Bolting Tools

More Enerpac Tools you will find in our Bolting Tools section in this catalogue.

Page: 182



Hydraulic Tools Section Overview

| Capacity ton (kN) | Tool type and functions | Series | | Page |
|-----------------------------------|-------------------------------------------------------|----------------------------|---------------------------------------------------------------------------------------|--------------|
| 2,5 - 12,5 (22 - 116) | Maintenance Sets | MS |  | 164 ▶ |
| 35 - 50 (311 - 498) | Punch Punch-Pump Sets | MSP |  | 168 ▶ |
| | | SP | | 170 ▶ |
| 16 (157) | Lifting Wedge | LW |  | 172 ▶ |
| 8,5 - 20 (75 - 178) | Machine Lifts | SOH |  | 173 ▶ |
| 1 - 80 (8,9 - 712) | Heavy-Duty Load Skates | ER ES ELP |  | 174 ▶ |
| 19 - 453 litres | Industrial Storage Cases | CM |  | 176 ▶ |
| 0,75 - 1,0 (6 - 8,9) | Hydraulic Wedgie Spread Cylinders | A WR |  | 177 ▶ |
| 3 - 20 (26 - 178) | Hydraulic Cutterheads Cutterhead-Pump Sets | WHC WHR STC |  | 178 ▶ |
| 3 - 20 (26 - 178) | Self-Contained Hydraulic Cutters | WMC |  | 179 ▶ |
| Nominal Bore ½ - 4 inch | Pipe Bender Sets | STB |  | 180 ▶ |

▼ Shown: MS2-10



- All sets include Enerpac pump, hose, cylinder and gauge
- Lock-on or threaded connectors
- Complete maintenance set for almost every maintenance application.

The Universal Hydraulic Tool Box



Maintenance Sets

Enerpac Maintenance sets are a complete assortment of hydraulic powered tools. Using these sets allows you to quickly configure a unique tool to meet your most difficult jobs.

Built around the Enerpac lightweight hand pump, hose and cylinder, these sets enable you to push, pull, lift, press, straighten, spread and clamp with forces up to 12,5 ton.



More Information







For detailed information on all included attachments, see the next pages.

Page: 166



Clamping a workpiece is just one of the many applications for the Enerpac maintenance sets.

▼ QUICK SELECTION CHART

| Capacity using attachments* ton (kN) | Set Model Number |  |  |  |  |  | Number of Attachment Components |  (kg) |
|-----------------------------------------|------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------|-----------------------------------------------------------------------------------------------|
| 2,5 (22) | MS2-4 | P-142 | HC-7206 | RC-55 | GP-10S | GA-4 | 33 | 26 |
| 2,5 (22) | MSFP-5 | P-142 | HC-7206 | RC-55 | GP-10S | GA-4 | 24 | 20 |
| 5,0 (50) | MSFP-10 | P-392 | HC-7206 | RC-106 | G2535L | GA-3 | 23 | 48 |
| 5,0 (50) | MS2-10 | P-392 | HC-7206 | RC-106 | GP-10S | GA-2 | 35 | 63 |
| 12,5 (116) | MS2-20 | P-392 | HC-7206 | RC-256 | GP-10S | GA-2 | 13 | 95 |
| 5,0-12,5 (50-116) | MS2-1020 | P-392 | HC-7206 | RC-102, -106, -256 | GP-10S | GA-2 | 53 | 158 |

* If no attachments are being used, capacity is double these values. Maximum operating pressure is then 700 bar.

Universal Maintenance Sets



CAUTION!

When cylinders are used with maintenance set attachments or components, the maximum system pressure must be limited to half the rated pressure (350 bar).



WARNING!

Only use attachments provided with set. Non-Enerpac attachments and longer extension tubes will reduce column strength, potentially creating unsafe conditions.

MS Series



Capacity (using attachments):

2,5 - 12,5 ton

Maximum Operating Pressure:

350 bar

▼ APPLICATION EXAMPLES



MS-Series, Maintenance Sets




CAUTION! When cylinders are used with maintenance set attachments or components, the maximum system pressure must be limited to half the rated pressure (350 bar).

Note: All dimensions in millimetres.

| Set Model Number | MS2-4 | MSFP-5 | MSFP-10 | MS2-10 | MS2-20 | MS2-1020 |
|-------------------------------------------------|--------------|--------------|--------------|--------------|------------|--------------------------|
| Base, Collar and Plunger Attachments | 2,5 ton | 2,5 ton | 5,0 ton | 5,0 ton | 12,5 ton | 5,0 - 12,5 ton |
| Cylinder Model(s) | RC-55 | RC-55 | RC-106 | RC-106 | RC-256 | RC-102, 106, 256 |
| 1 | A-23 | A-23 | A-13 | A-13 | A-28 | A-13, A-28 |
| 2 | A-25 | A-25 | A-21 | A-21 | A-27 | A-21, A-27 |
| 3 | A-1034 | A-1034 | A-20 | A-20 | A-595 | A-20, A-595 |
| 4 | MZ-4010 | MZ-4010 | A-14 | A-14 | A-243 | A-14, A-243 |
| 5 | A-545 | A-545 | A-10 | A-10 | - | A-10 (2x) |
| 6 | - | - | - | A-8 | - | A-8 |
| 7 | A-530 | A-530 | A-6 | A-6 | - | A-6 |
| 8 | MZ-4011 | - | - | A-192 | - | A-192 |
| 9 | - | - | - | A-305 | - | A-305 |
| 10 | A-531 | A-531 | A-18 | A-18 | - | A-18 |
| 11 | - | - | - | A-185 | - | A-185 |
| 12 | A-532 | A-532 | A-15 | A-15 | - | A-15 |
| 13 | - | - | - | - | A-607 | A-607 |
| 14 | A-629 | A-629 | A-129 | A-129 | - | A-129 |
| 15 | A-539 | A-539 | A-128 | A-128 | - | A-128 |
| Chains and Attachments for Pulling Applications | 2,5 ton | 2,5 ton | 5,0 ton | 5,0 ton | 12,5 ton | 5,0 - 12,5 ton |
| 16 | A-558 | - | - | A-132 | A-238 | A-132, A-238 |
| 17 | - | - | - | A-5 (2x) | - | A-5 (2x) |
| 18 | A-557 (2x) | - | - | A-141 (2x) | A-218 (2x) | A-141 (2x), A-18 (2x) |
| Extension Tubes, Connectors and Adaptors | 2,5 ton | 2,5 ton | 5,0 ton | 5,0 ton | 12,5 ton | 5,0 - 12,5 ton |
| 19 | A-544 | - | - | A-19 (2x) | A-242 (2x) | A-19 (2x) A-242 (2x) |
| 20 | WR-5 | WR-5 | WR-5 | A-92 | - | A-92 |
| 21 | MZ-4013 (4x) | MZ-4013 (4x) | A-16 (4x) | A-16 (4x) | - | A-16 (4x) |
| 22 | MZ-4007 (3x) | MZ-4007 (3x) | MZ-1050 (3x) | MZ-1050 (2x) | - | MZ-1050 (3x) |
| 23 | MZ-4008 (2x) | - | - | MZ-1051 | - | MZ-1051 (2x) |
| 24 | MZ-4009 | MZ-4009 | MZ-1052 | MZ-1052 | - | MZ-1052 |
| 25 | - | - | - | A-285 | - | A-285 |
| 26 | A-650 | - | - | - | - | - |
| 27 Length (mm) | 76 | MZ-4002 | MZ-4002 | - | - | - |
| | 127 | MZ-4003 | MZ-4003 | MZ-1002 | MZ-1002 | - |
| | 254 | MZ-4004 | MZ-4004 | MZ-1003 | MZ-1003 | A-239 |
| | 254 | | | | | A-239 |
| | 457 | MZ-4005 (2x) | MZ-4005 | MZ-1004 | MZ-1004 | A-240 |
| | 457 | | | | | A-240 |
| | 584 | MZ-4006 | MZ-4006 | - | - | - |
| | 762 | - | - | MZ-1005 | MZ-1005 | A-241 |
| | 762 | - | - | - | - | A-241 |
| 28 Storage Case | CM-6 | CM-6 | CW-350 | CW-350 | CW-350 | CW-750 |
| Set Weight (kg) | 26 | 20 | 48 | 63 | 95 | 158 |


Base, Collar and Plunger Attachments

1 Threaded Adaptor




| ton | Model Nr. | A | B | C | D |
|------|-----------|----------------|----|----|---------------------|
| 2,5 | A-23 | 3/4" - 16 UN | 28 | 26 | 3/4" - 14 NPT |
| 5,0 | A-13 | 1" - 8 UN | 31 | 42 | 1 1/4" - 11 1/2 NPT |
| 12,5 | A-28 | 1 1/2" - 16 UN | 47 | 69 | 2" - 11 1/2 NPT |

2 Base Attachment




| ton | Model Nr. | A | B | C | D |
|------|-----------|---------------------|----|----|----|
| 2,5 | A-25 | 3/4" - 14 NPT | 50 | 12 | 44 |
| 5,0 | A-21 | 1 1/4" - 11 1/2 NPT | 57 | 12 | 65 |
| 12,5 | A-27 | 2" - 11 1/2 NPT | 63 | 12 | 98 |

3 Collar Toe



| ton | Model Nr. | A | B | C | D |
|------|-----------|-----------------|-----|----|----|
| 2,5 | A-1034 | 1 1/2" - 16 UN | 54 | 50 | 31 |
| 5,0 | A-20 | 2 1/4" - 14 UN | 80 | 57 | 57 |
| 12,5 | A-595 | 3 5/16" - 12 UN | 103 | 51 | 80 |


4 Flat Base



| ton | Model Nr. | A | B | C | D |
|------|-----------|---------------------|-----|----|-----|
| 2,5 | MZ-4010 | 3/4" - 14 NPT | 114 | 31 | 63 |
| 5,0 | A-14 | 1 1/4" - 11 1/2 NPT | 165 | 35 | 88 |
| 12,5 | A-243* | 2" - 11 1/2 NPT | 165 | 58 | 165 |


* A-243 is a round base model.

5 Threaded Connector



| ton | Model Nr. | A | B |
|-----|-----------|---------------------|----|
| 2,5 | A-545 | 3/4" - 14 NPT | 35 |
| 5,0 | A-10 | 1 1/4" - 11 1/2 NPT | 41 |

6 Lock-on Clamp Toe



| ton | Model Nr. | A | B | C | D |
|-----|-----------|----|-----|----|----|
| 5,0 | A-8 | 43 | 105 | 50 | 57 |

Universal Maintenance Sets, MS-Series

7 Threaded Plunger Toe

| ton | Model Nr. | A | B | C | D |
|-----|--------------|---------------|----|----|----|
| 2,5 | A-530 | ¾" - 14 NPT | 57 | 25 | 33 |
| 5,0 | A-6 | 1¼" - 11½ NPT | 82 | 31 | 57 |

14 Wedge Head

| ton | Model Nr. | A | B | C | D |
|-----|--------------|---------------|-----|----|----|
| 2,5 | A-629 | ¾" - 14 NPT | 69 | 33 | 28 |
| 5,0 | A-129 | 1¼" - 11½ NPT | 101 | 50 | 44 |

20 Spreader

| ton | Model Nr. | A | B | C | D |
|-----|-------------|-------------|-----|------|-----|
| 1,0 | WR-5 | — | 223 | 12,8 | 94 |
| 1,0 | A-92 | 2¼" - 14 UN | 244 | 35 | 158 |

8 Collar Clamp Head

| ton | Model Nr. | A | B | C | D |
|-----|----------------|-------------|----|----|-------------|
| 2,5 | MZ-4011 | ¾" - 14 NPT | 49 | 76 | 1½" - 16 UN |
| 5,0 | A-192 | — | 42 | 63 | 50 |

15 Rubber Flex Head

| ton | Model Nr. | A | B | C |
|-----|--------------|---------------|----|----|
| 2,5 | A-539 | ¾" - 14 NPT | 44 | 69 |
| 5,0 | A-128 | 1¼" - 11½ NPT | 86 | 86 |

21 Lock Pin

| ton | Model Nr. | A | B |
|-----|----------------|------|----|
| 2,5 | MZ-4013 | 7,9 | 41 |
| 5,0 | A-16 | 11,2 | 82 |

9 Spreader Toe

| ton | Model Nr. | A | B | C | D |
|-----|--------------|---------------|-----|----|----|
| 5,0 | A-305 | 1¼" - 11½ NPT | 114 | 25 | 50 |

Chains and Attachments for Pulling

16 Single Chain Plate

| ton | Model Nr. | A | B | C | D |
|------|--------------|-------------|-----|-----|-----|
| 2,5 | A-558 | 1½" - 16 UN | 196 | 39 | 44 |
| 5,0 | A-132 | 2¼" - 14 UN | 307 | 63 | 79 |
| 12,5 | A-238 | 3⅝" - 12 UN | 450 | 102 | 125 |

22 Lock-on Connector

| ton | Model Nr. | A | B |
|-----|----------------|----|-----|
| 2,5 | MZ-4007 | 19 | 79 |
| 5,0 | MZ-1050 | 33 | 127 |

10 Serrated Saddle

| ton | Model Nr. | A | B | C |
|-----|--------------|---------------|----|----|
| 2,5 | A-531 | ¾" - 14 NPT | 27 | 31 |
| 5,0 | A-18 | 1¼" - 11½ NPT | 38 | 50 |

17 Double Chain Plate

| ton | Model Nr. | A | B | C | D |
|-----|------------|---------------|-----|----|-----|
| 5,0 | A-5 | 1¼" - 11½ NPT | 130 | 50 | 126 |

23 Male Lock-on Adaptor

| ton | Model Nr. | A | B | C |
|-----|----------------|---------------|----|----|
| 2,5 | MZ-4008 | ¾" - 14 NPT | 60 | 19 |
| 5,0 | MZ-1051 | 1¼" - 11½ NPT | 90 | 33 |

11 Smooth Saddle

| ton | Model Nr. | A | B | C |
|-----|--------------|---------------|----|----|
| 5,0 | A-185 | 1¼" - 11½ NPT | 38 | 50 |

18 Chain with Hook

| ton | Model Nr. | Chain Length |
|------|--------------|--------------|
| 2,5 | A-557 | 1,5 metres |
| 5,0 | A-141 | 1,8 metres |
| 12,5 | A-218 | 2,4 metres |

24 Female Lock-on Adaptor

| ton | Model Nr. | A | B | C |
|-----|----------------|---------------|----|----|
| 2,5 | MZ-4009 | ¾" - 14 NPT | 65 | 19 |
| 5,0 | MZ-1052 | 1¼" - 11½ NPT | 96 | 33 |

12 90° V-Base

| ton | Model Nr. | A | B | C | D |
|-----|--------------|---------------|----|----|----|
| 2,5 | A-532 | ¾" - 14 NPT | 38 | 47 | 25 |
| 5,0 | A-15 | 1¼" - 11½ NPT | 54 | 57 | 54 |

Tubes, Connectors and Adaptors

19 Pipe Coupling

| ton | Model Nr. | A | B | C |
|------|--------------|---------------|----|----|
| 2,5 | A-544 | ¾" - 14 NPT | 42 | 33 |
| 5,0 | A-19 | 1¼" - 11½ NPT | 49 | 54 |
| 12,5 | A-242 | 2" - 11½ NPT | 88 | 82 |

25 Adjustable Extension

| ton | Model Nr. | A | B | C | D |
|-----|--------------|---------------|-----|-----|----|
| 5,0 | A-285 | 1¼" - 11½ NPT | 335 | 441 | 33 |

13 Plunger Base

| ton | Model Nr. | A | B | C |
|------|--------------|--------------|-----|----|
| 12,5 | A-607 | 2" - 11½ NPT | 166 | 38 |

26 Slip-on Extension

| ton | Model Nr. | A | B | C |
|-----|--------------|-------------|-----|-----|
| 2,5 | A-650 | ¾" - 14 NPT | 200 | 365 |

SP-Series, Lightweight Hydraulic Punch

▼ Shown: SP-35S



- 12,7 mm thick capacity through mild steel
- Round, oblong and square punches and dies are available to solve your punching applications
- Long life Enerpac single-acting, spring return design
- Durable steel case keeps tools and dies together and provides for easy carrying and storage
- CR-400 coupler included.

Much Faster than Drilling



Tool Kit SPK-10

Included with all 35 Ton punches, this tool kit is used to remove and install the punch into the head. Can be ordered as a replacement under model number **SPK-10**.



Ordering Information

The 35 ton hydraulic Punch may be ordered by itself or as a set, including a pump. A punch or die may also be ordered separately or as a matched set. Please refer to the Quick Selection Chart information on top of the next page.

▼ STANDARD PUNCHES AND DIES SELECTION CHART

| Hole Shape | Imperial ¹⁾ (inch) | | Metric ¹⁾ (mm) | |
|------------|----------------------------------|-----------|------------------------------|-----------|
| | Hole Size | Bolt Size | Hole Size | Bolt Size |
| ● | 0,31 | 1/4 | 7,9 | – |
| ● | 0,38 | 5/16 | 9,5 | M8 |
| ● | 0,44 | 3/8 | 11,1 | M10 |
| ● | 0,53 | 7/16 | 13,5 | M12 |
| ● | 0,56 | 1/2 | 14,3 | – |
| ● | 0,69 | 5/8 | 17,5 | M16 |
| ● | 0,78 | – | 19,8 | M18 |
| ● | 0,81 | 3/4 | 20,6 | – |
| ■ | 0,31 | 1/4 | 7,9 | – |
| ■ | 0,38 | 5/16 | 9,5 | M8 |
| ■ | 0,44 | 3/8 | 11,1 | M10 |
| ■ | 0,50 | 7/16 | 12,7 | M12 |
| ■ | .31 x .75 | 1/4 | 7,9 x 19 | – |
| ■ | .38 x .75 | 5/16 | 9,5 x 19 | M8 |
| ■ | .44 x .75 | 3/8 | 11,1 x 19 | M10 |
| ■ | .50 x .75 | 7/16 | 12,7 x 19 | M12 |




¹⁾ Material thickness should not exceed hole diameter

▼ SP-Series, Lightweight Hydraulic Punch – Much Faster than Drilling.



Single-Acting, Spring Return Hydraulic Punch

▼ QUICK SELECTION CHART


| *  | Punch & Die Set  | Included | | | | Model Number |  (kg) |
|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------|------------|---------|--------|---------------|------------------|-------------------------------------------------------------------------------------------|
| | | Pump | Hose | Gauge | Gauge Adaptor | | |
| SP-35 | Standard** | P-392 | HC-7206 | GP-10S | GA-2 | STP-35H | 25 |
| SP-35 | Standard** | PATG-1102N | HC-7206 | GP-10S | GA-2 | STP-35A | 29 |
| SP-35 | - | - | - | - | - | SP-35 | 16 |
| SP-35 | Standard** | - | - | - | - | SP-35S | 18 |
| SP-35 | Standard** | PUD-1100E | HC-7206 | - | - | SP-35SPE | 29 |
| SP-35 | Metric*** | - | - | - | - | MSP-351 | 21 |
| SP-35 | Metric*** | PUD-1100E | HC-7206 | - | - | MSP-351PE | 32 |

* Punch oil capacity: 76 cm³

Includes the following punch and die sets:

** SPD-438, SPD-688, SPD-563 and SPD-813

*** SPD-375, SPD-531, SPD-438 and SPD-688

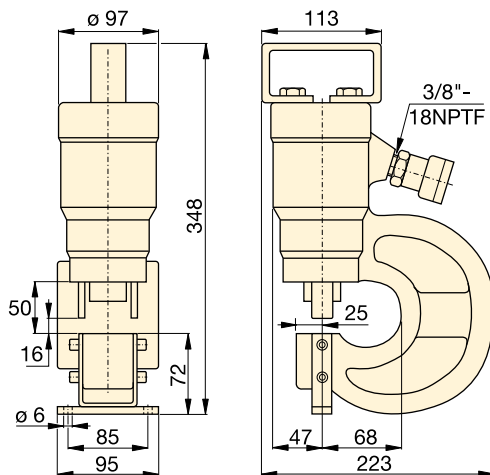

MSP SP STP Series



Capacity:

35 ton

Hole Sizes:

7,9 - 20,6 mm

Maximum Operating Pressure:

700 bar



CAUTION!

The chart below is for reference only! Maximum allowable material thickness to be punched varies with set wear.




CAUTION!

Material thickness should not exceed hole diameter.

Steel Qualities (see table):

- 1) Mild A-7
- 2) Boiler Plate
- 3) Structural A-36
- 4) Struct Corten (ASTM A242)
- 5) Cold Rolled C-1018
- 6) Hot Rolled C-1050
- 7) Hot Rolled C-1095
- 8) Hot Rolled C-1095 Annealed
- 9) Stainless Annealed
- 10) Stainless 304 Hot Rolled
- 11) Stainless 316 Cold Rolled

| Model Nr. Standard Punch & Die Set  | Maximum allowable material thickness to be punched (mm) Material thickness should not exceed hole diameter | | | | | | | | | | |
|-------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------|------|------|------|------|------|-----|-----|------|------|------|
| | 1) | 2) | 3) | 4) | 5) | 6) | 7) | 8) | 9) | 10) | 11) |
| SPD-313 | 7,9 | 7,9 | 6,4 | 6,4 | 6,4 | 6,4 | 3,3 | 4,8 | 6,4 | 6,4 | 6,4 |
| SPD-375 | 9,7 | 9,7 | 7,9 | 7,9 | 7,9 | 7,9 | 4,8 | 6,4 | 7,9 | 7,9 | 7,9 |
| SPD-438 | 11,2 | 11,2 | 9,7 | 9,7 | 9,7 | 7,9 | 4,8 | 7,9 | 7,9 | 7,9 | 7,9 |
| SPD-531 | 12,7 | 12,7 | 11,2 | 11,2 | 11,2 | 9,7 | 6,4 | 7,9 | 9,7 | 9,7 | 9,7 |
| SPD-563 | 12,7 | 12,7 | 12,7 | 11,2 | 12,7 | 11,2 | 6,4 | 9,7 | 11,2 | 11,2 | 11,2 |
| SPD-688 | 12,7 | 12,7 | 12,7 | 11,2 | 12,7 | 10,2 | 6,4 | 7,9 | 10,2 | 10,2 | 10,2 |
| SPD-781 | 12,7 | 12,7 | 12,7 | 11,2 | 12,7 | 9,7 | 6,4 | 7,9 | 9,7 | 9,9 | 9,7 |
| SPD-813 | 12,7 | 12,7 | 12,7 | 11,2 | 12,7 | 7,9 | 4,8 | 7,9 | 7,9 | 7,9 | 7,9 |
| SPD-458 | 7,9 | 7,9 | 6,4 | 6,4 | 6,4 | 6,4 | 3,3 | 4,8 | 6,4 | 6,4 | 6,4 |
| SPD-549 | 9,7 | 9,7 | 7,9 | 7,9 | 7,9 | 7,9 | 4,8 | 6,4 | 7,9 | 7,9 | 7,9 |
| SPD-639 | 11,2 | 11,2 | 9,7 | 9,7 | 9,7 | 7,9 | 4,8 | 7,9 | 7,9 | 7,9 | 7,9 |
| SPD-728 | 12,7 | 12,7 | 11,2 | 11,2 | 11,2 | 9,7 | 6,4 | 7,9 | 9,7 | 9,7 | 8,6 |
| SPD-106 | 7,9 | 7,9 | 6,4 | 6,4 | 6,4 | 6,4 | 3,3 | 4,8 | 6,4 | 6,4 | 6,4 |
| SPD-125 | 9,7 | 9,7 | 7,9 | 7,9 | 7,9 | 7,9 | 4,8 | 6,4 | 7,9 | 7,9 | 7,9 |
| SPD-188 | 11,2 | 11,2 | 9,7 | 9,7 | 9,7 | 7,9 | 4,8 | 7,9 | 7,9 | 7,9 | 7,9 |
| SPD-250 | 12,7 | 12,7 | 11,2 | 11,2 | 11,2 | 9,7 | 6,4 | 7,9 | 9,7 | 9,7 | 9,7 |

▼ The hydraulic punch cuts the time spent forming holes.



SP-Series, 50 Ton Hydraulic Punch

ENERPAC 
POWERFUL SOLUTIONS. GLOBAL FORCE.

▼ Shown: SP-50100



- Available as a complete set including electric pump and hoses
- Double-acting cylinder design for fast cycle times
- Punch and die changeover tools included
- Lifting bracket included
- Adjustable power stripper prevents movement of the metal during stripping
- CR-400 female couplers included.

Cuts the Time Spent Forming Holes



Depth Stop

For simplified repetitive punching applications an adjustable Depth Stop is available. Order model number: **SP-110**.



Foot Mounting Kit

A foot mounting kit for easy mounting of the 50 ton punch to workbench or fixture is available. Order model number: **SP-120**.



Ordering Information

The 50-ton Hydraulic Punch may be ordered by itself or as a set with an electric pump. A punch and die may be ordered as a matched set.

Please refer to the selection chart information.




◀ Save time using the 50-ton Enerpac Punch.

▼ Shown below is the 50 ton punch with SP-120 and SP-110 assembled.



50 Ton Double-Acting Hydraulic Punch

▼ QUICK SELECTION CHART PUNCH SETS

| Included | | | | Set Model Number |  (kg) |
|---------------------|------------------|---------------|---------------------|------------------|-------------------------------------------------------------------------------------------|
| Model Number Punch* | Punch & Die Sets | Electric Pump | Hydraulic Hose (2x) | | |
| SP-50 | All ** | - | - | SP-50100 | 116 |
| SP-50 | All ** | ZE4410SE | HC-7206 | SP-5000E | 174 |

* Punch Oil Capacity:
Advance: 278 cm³
Retract: 229 cm³

** All standard sets from chart below.

SP Series



Capacity:


50 ton (490 kN)

Hole Sizes:

13,5 - 26,2 mm


Maximum Operating Pressure:

700 bar

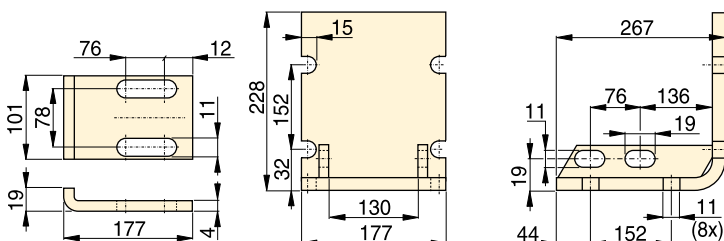

SP-110

SP-120

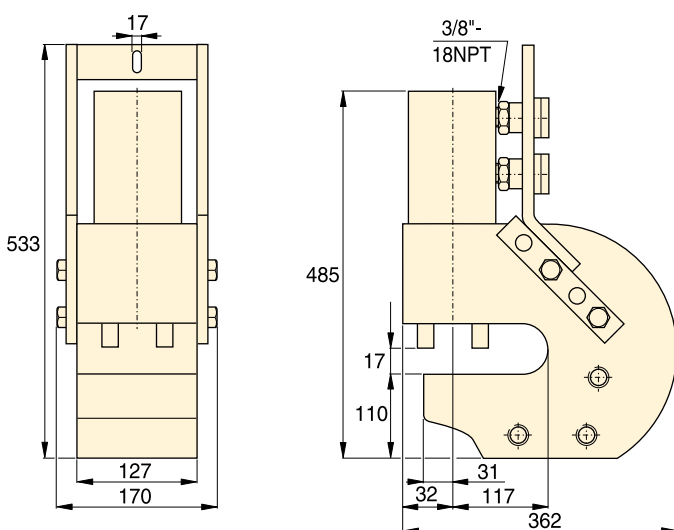

SP-50



CAUTION!

Material thickness should not exceed hole diameter.




CAUTION!

Chart below is for reference only! Maximum allowable material thickness to be punched varies with set wear.

Steel Qualities (see table below):

- 1) Mild A-7
- 2) Boiler Plate
- 3) Structural A-36
- 4) Struct Corten (ASTM A242)
- 5) Cold Rolled C-1018
- 6) Hot Rolled C-1050
- 7) Hot Rolled C-1095
- 8) Hot Rolled C-1095 Annealed
- 9) Stainless Annealed
- 10) Stainless 304 Hot Rolled
- 11) Stainless 316 Cold Rolled

▼ STANDARD PUNCH AND DIE SELECTION CHART

| Hole Shape | Hole Size (mm) | Bolt Size (mm) | Model Numbers Standard Punch and Die Set  | Maximum Allowable Material Thickness To Be Punched (mm) | | | | | | | | | | |
|------------|-------------------|-------------------|---------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------|------|------|------|------|------|-----|------|------|------|------|
| | | | | 1) | 2) | 3) | 4) | 5) | 6) | 7) | 8) | 9) | 10) | 11) |
| ● | 13,5 | M12 | SP-150 | 13,5 | 13,5 | 13,5 | 13,5 | 13,5 | 12,4 | 8,1 | 10,2 | 12,4 | 12,4 | 12,4 |
| ● | 16,7 | M16 | SP-170 | - | - | - | - | - | 13,0 | 8,1 | 10,2 | 13,0 | 13,0 | 13,0 |
| ● | 19,8 | M18 | SP-190 | - | - | - | - | - | 12,4 | 8,1 | 10,2 | 12,4 | 12,7 | 12,4 |
| ● | 23,1 | M20 | SP-121 | 14,2 | 14,2 | 14,2 | 12,7 | 14,2 | 8,9 | 5,6 | 8,9 | 8,9 | 8,9 | 8,9 |
| ● | 26,2 | M24 | SP-123 | 14,2 | 14,2 | 14,2 | 11,2 | 14,2 | 7,9 | 4,8 | 7,9 | 7,9 | 7,9 | 7,9 |

LW-Series, Hydraulic Vertical Lifting Wedge

▼ LW-16 with SB-2 and optional LWB-1



- Requires very small access gap of only 10 mm
- Lifting force 16 ton at 700 bar hydraulic pressure
- Each step can spread under full load
- Straight vertical lifting
- Unique interlocking wedge design: no first step bending and risk of slipping out
- Single-acting, spring return cylinder
- Lifting wedge LW-16 includes safety block SB-2
- Includes RC-Series Cylinder with CR-400 coupler.

▼ For lifting heavy equipment with minimum floor clearance the LW-16 is the ideal tool.



LW Series

Maximum Lifting Force:

16 ton (157 kN)

Lifting Stroke:

21 mm

Tip Clearance / Maximum Spread *:

10 mm / 81,5 mm

Maximum Operating Pressure:

700 bar



Power Box

Tool box with P-392 hand pump, gauge adaptor assembly, hose and LW-16.



Page: 61




Control Manifolds

Control Manifold to control two or four lifting wedges simultaneously.
AM-21 with 3 ports 3/8" NPTF
AM-41 with 5 ports 3/8" NPTF.

Page: 126

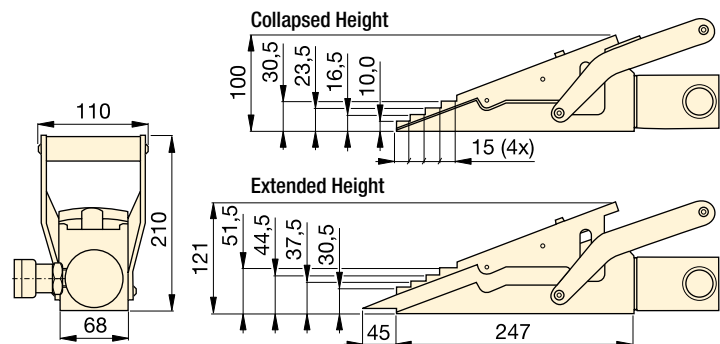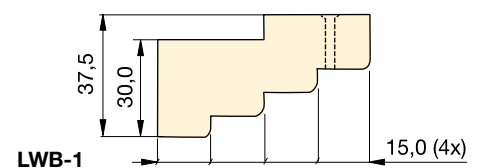

| Maximum Lifting Force | Lifting Stroke | Model Number | Tip Clearance | Maximum Operating Pressure | Oil Capacity |  |
|-----------------------|----------------|--------------|---------------|----------------------------|--------------------|---------------------------------------------------------------------------------------|
| ton (kN) | (mm) | | (mm) | (bar) | (cm ³) | (kg) |
| 16 (157) | 21 | LW-16 | 10 | 700 | 78 | 9,0 |

Use optional stepped block LWB-1 to increase wedge lifting height by 30 mm.

* Using LWB-1.

Hydraulic Machine Lifts

▼ SOH-10-6



SOH Series

Lifting Capacity:
8,5 - 20 ton

Stroke:
136 - 157 mm

Toe Clearance:
20 mm

Maximum Operating Pressure:
700 bar

- For lifting heavy equipment with minimum available access
- Remote hydraulic pump enhances safety
- Low height lifting toe
- Precision guided to reduce friction and isolate cylinder from side-loads
- Two extendable support feet provide extra stability
- Includes RC-Series DUO Cylinder with CR-400 coupler.



RSM-Series Flat-Jac®

Low height, single acting spring-return cylinders are ideal for space restricted applications.

Page: 22




Load Skates

In combination with the Enerpac Machine Lifts we recommend Load Skates for moving heavy loads.


Page: 174

▼ Limited access under this machine makes the Enerpac hydraulic machine lift the perfect solution.

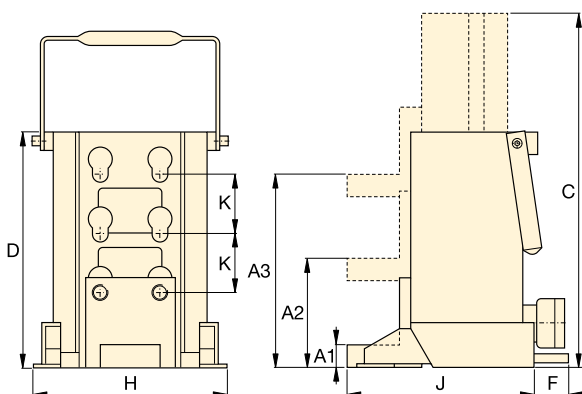

| Capacity | Toe Clearance (mm) | | | Stroke | Model Number | Oil Capacity | Dimensions (mm) | | | | | | 🏋️ (kg) |
|----------|--------------------|------------|------------|--------|--------------|--------------|---------------------|---------------------|----|-----|-----|----|---------|
| | Minimum A1 | Central A2 | Maximum A3 | | | | Total Ext. Height C | Total Body Height D | F | H | J | K | |
| 8,5 (75) | 20 | 95 | 169 | 136 | SOH-10-6 | 224 | 430 | 294 | – | 190 | 214 | 74 | 26 |
| 20 (178) | 30 | 110 | 190 | 157 | SOH-23-6 | 525 | 472 | 320 | 65 | 265 | 250 | 80 | 45 |

▼ Shown: Set ERS-20

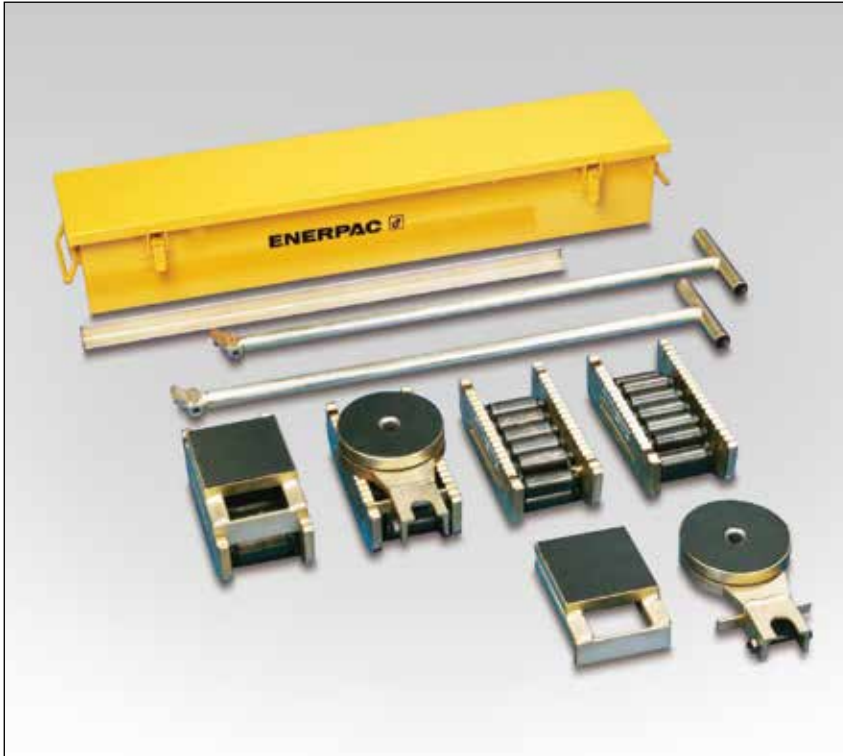

- Rugged and sturdy construction for long life
- Low profile construction for increased stability
- Low rolling-resistance allows for easy transportation
- Attachable load leveling plates and swivel turntables for turning corners.

Move Heavy Loads Easily and Safely



Sets (see table) include all components necessary to handle a variety of applications.

Two **ELB-1** link-up bars, two **ERH-1** handles (875 mm long) and one **EMB-1** metal box are included.

Optional long handle **ERH-2** (1180 mm) available for 60 and 80 ton only.



Lifting Wedge and Machine Lifts

To place the Load Skates, the load must first be lifted. This can be done easily and safely using the Enerpac Lifting Wedge or Machine Lifts.

Page: 172


▼ Heavy transport using Load Skates. The machine is first lifted, using SOH-Series Enerpac Machine Lifts.




▼ Chemical tank transportation: The first few centimetres the load was lifted with RCS-Series low height cylinders and then moved on to load skates for transportation.




Heavy Duty Caterroller™ Load Skates

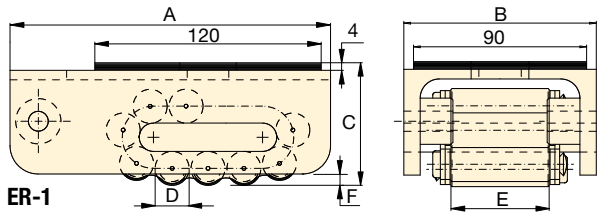


ER-1

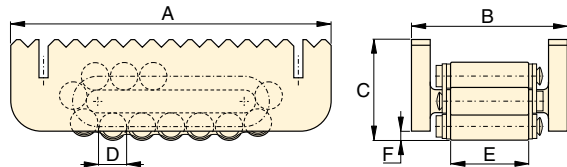


ER-10, ER-15, ER-30

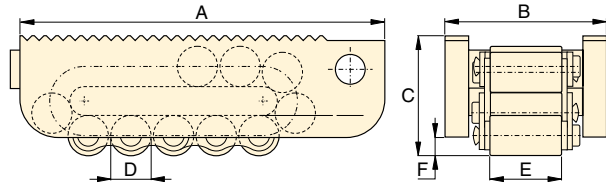


ER-60, ER-80



ES-1,
Turntable Swivel



ES-10, ES-15, ES-30
Turntable Swivel




ES-60, ES-80,
Turntable Swivel

**EL
ER
ES
Series**




Maximum Carrying Capacity:
80 ton (711 kN)

| Load Skates may be ordered separately or as a matched set. | | | | | |
|------------------------------------------------------------|------------------|------------------|------------------------|----------------------|---------------------------------------------|
| Set Capacity * | Set Model Number | Load Skates (4x) | Turntable Swivels (2x) | Leveling Plates (2x) | Weight including handles and metal box (kg) |
| 20 (178) | ERS-20 | ER-10 | ES-10 | ELP-10 | 49 |
| 30 (267) | ERS-30 | ER-15 | ES-15 | ELP-15 | 55 |
| 60 (533) | ERS-60 | ER-30 | ES-30 | ELP-30 | 75 |



ELP-10, ELP-15, ELP-30
Levelling Plate



ELP-60, ELP-80
Levelling Plate

* Sets are designed to enable two skates to take full load for extra safety on uneven floor surfaces

| | Capacity ton (kN) | Model Number | Dimensions (mm) | | | | | | Contact Rolls per Skate | Rollers per Skate | Weight (kg) |
|--|----------------------|-----------------|-----------------|-----|-----|-----|----|----|-------------------------------|----------------------|----------------|
| | | | A | B | C | D | E | F | | | |
| | 1 (8,9) | ER-1 | 170 | 100 | 65 | 18 | 51 | 6 | 4 | 11 | 3,8 |
| | 10 (89) | ER-10 | 210 | 102 | 66 | 18 | 51 | 6 | 5 | 15 | 5,2 |
| | 15 (133) | ER-15 | 220 | 115 | 75 | 24 | 60 | 10 | 4 | 13 | 7,3 |
| | 30 (267) | ER-30 | 270 | 130 | 92 | 30 | 68 | 10 | 4 | 13 | 13,0 |
| | 60 (533) | ER-60 | 380 | 168 | 125 | 42 | 76 | 16 | 4 | 13 | 31,9 |
| | 1 (8,9) | ES-1 | 207 | - | 26 | 90 | - | - | - | - | 1,1 |
| | 10 (89) | ES-10 | 220 | 73 | 42 | 130 | - | - | - | - | 3,7 |
| | 15 (133) | ES-15 | 220 | 86 | 42 | 130 | - | - | - | - | 3,7 |
| | 30 (267) | ES-30 | 250 | 96 | 48 | 150 | - | - | - | - | 5,3 |
| | 60 (533) | ES-60 | 275 | 114 | 61 | 190 | - | - | - | - | 13,7 |
| | 10 (89) | ELP-10 | 149 | 73 | 42 | 120 | - | - | - | - | 3,7 |
| | 15 (133) | ELP-15 | 149 | 86 | 42 | 120 | - | - | - | - | 3,7 |
| | 30 (267) | ELP-30 | 178 | 96 | 48 | 130 | - | - | - | - | 5,3 |
| | 60 (533) | ELP-60 | 270 | 114 | 61 | 180 | - | - | - | - | 13,8 |
| | 80 (711) | ELP-80 | 350 | 128 | 61 | 200 | - | - | - | - | 18,8 |

▼ CM-16



- Protect your equipment from dust, water, grease and dirt
- Reduce losses on the jobsite, maintenance area or shop
- Durable steel, painted with rust-resistant primer and finished in durable enamel
- Heavy duty hinges and lifting handles
- Lockable.

▼ When not storing the lifting system, this heavy-duty storage case doubles as a work station.



CM Series

Case Size:

19 - 453 litres

Protect your Equipment



Maintenance Sets

Enerpac Maintenance sets are a complete assortment of hydraulic powered tools.

Using these sets allows you to quickly configure a unique tool to meet your most difficult jobs.

Built around the Enerpac lightweight hand pump, hose and cylinder, these sets enable you to push, pull, lift, press, straighten, spread and clamp with forces up to 12,5 ton.

Page: 164




Hydraulic Pullers

These hydraulic pullers eliminate time-consuming and unsafe hammering, heating or prying.

Damage to parts is minimized through the use of controlled hydraulic power.

Page: 151


| Case Size (litres) | Model Number | Inside Dimensions L x W x H (mm) | Thickness (mm) |  (kg) |
|-----------------------|--------------|----------------------------------------|-------------------|-----------------------------------------------------------------------------------------------|
| 19 | CM-6 | 597 x 178 x 203 | 0,9 | 7 |
| 32 | CM-1 | 622 x 282 x 165 | 0,9 | 8 |
| 127 | CM-4 | 778 x 454 x 354 | 1,5 | 16 |
| 212 | CM-7 | 1210 x 387 x 457 | 1,9 | 57 |
| 453 | CM-16 | 1216 x 606 x 557 | 1,5 | 55 |

Hydraulic Wedgie and Spread Cylinders


▼ Shown clockwise from top: **WR-15, WR-5, A-92**




- **WR-5:** For use in very confined work areas
- **WR-15:** For long stroke spreading applications
- **Single-acting, spring return**
- **A-92:** Spreader attachment; threads on 10 ton RC-Series cylinders * (except RC-101).




WR-5

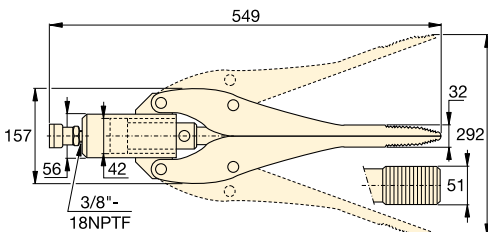

WR-15



A-92

| Cylinder Capacity | Tip Clearance | Model Number | Maximum Spread | Cylinder Effective Area | Oil Capacity |  |
|-------------------|---------------|---------------|----------------|-------------------------|--------------------|-------------------------------------------------------------------------------------|
| ton (kN) | (mm) | | (mm) | (cm ²) | (cm ³) | (kg) |
| 1,0 (8,9) | 12,8 | WR-5 | 94 | 6,5 | 10 | 2,3 |
| 0,75 (6) | 32,0 | WR-15 | 292 | 14,5 | 64 | 11,3 |
| 1,0 (8,9) | 35,0 | A-92 * | 158 | – | – | 3,6 |

* Maximum system pressure must be limited to half the rated pressure (350 bar).

A WR Series



Capacity:

0,75 - 1,0 ton

Tip Clearance:

12,8 - 35 mm

Maximum Spread:

94 - 292 mm

Maximum Operating Pressure:

700 bar



RC-Series Cylinders

10 ton RC-Series DUO cylinders (except RC-101) fit into A-92 Spreader Attachment.

Page: **6**



Power Box

Tool box with P-392 hand pump, gauge adaptor assembly, hose and WR-5.

Page: **61**




Best Match Hand Pump

To power your WR-5 and WR-15 the **P-392** hand pump is an ideal choice. Use Enerpac H700-Series hose (page 122) for hydraulic connection.

Page: **72**

▼ A WR-5 wedgie cylinder is used to loosen a bridge bearing.

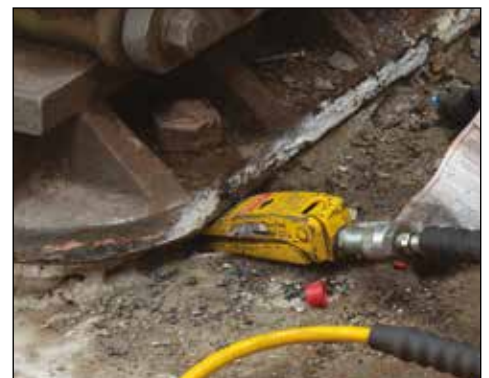

WHC, WHR-Series, Hydraulic Cutterheads

▼ Shown from left to right: WHC-4000, WHC-750




WHC, WHR, STC Series

Capacity:
3 - 20 ton

Cutting Capacity:
∅ 13 - 101 mm

Maximum Operating Pressure:
700 bar



Tool-Pump Sets

Cutterheads marked with an * are available as sets (pump, tool, gauge, couplers and hose) for your ordering convenience.

| Cutterhead Model Nr. | Pump Model Nr. | Set Model Number |
|----------------------|----------------|-------------------|
| WHC-750 | P-392 | STC-750H |
| WHC-750 | P-392FP | STC-750FP |
| WHC-750 | PATG-1102N | STC-750A |
| WHC-1250 | P-392 | STC-1250H |
| WHC-1250 | P-392FP | STC-1250FP |
| WHC-1250 | PATG-1102N | STC-1250A |

- Single-acting, spring return on all models, except WHR-1250
- Guillotine action for smooth cutting operation
- Lifting handles on larger models for easy transport
- Carrying bag included for easy carrying and tool protection
- Ideal for use with most Enerpac pumps featuring 3-way valve or dump valve and 700 bar pressure rating (except WHR-1250, which requires 4-way valve)
- CR-400 coupler and dust cap included on all models.

▼ Steel rope is easily cut with the smooth guillotine action of an Enerpac cutterhead.



▼ Selection Chart Maximum Cutting Capacities (∅ in mm)

| Cutter Head Operation | Capacity ton | Model Number | Oil Capacity (cm ³) | Length (mm) | Steel Wire Rope, Hemp-core or IWRC 6x7 6x12 6x19 | Round Bar | | | | Wire Strand | | | | Cable | | Replacement Blades (kg) | |
|-----------------------|-----------------|------------------|------------------------------------|----------------|-----------------------------------------------------------|--------------------|----------------------|------------------|-----------------|--------------------------|----------------------------|------|------------------------|---------------------|---------------------------|----------------------------|-----------------|
| | | | | | | Copper Wire or Bar | Aluminum Wire or Bar | Soft Steel Bolts | Reinforcing Bar | Bare Copper Wire Strands | Bare Aluminum Wire Strands | ACSR | Guy Steel Wire Strands | Telephone Cable CPP | Underground Cable (Power) | | |
| Single-Acting | 4 | WHC-750* | 19,7 | 127 | 19 | 19 | 19 | 19 | 13 | 19 | 19 | 19 | 16 | ☆ | ☆ | 3,2 | WCB-750 |
| | 20 | WHC-1250* | 134,4 | 279 | 31 | 31 | 31 | 31 | 25 | 31 | 31 | 31 | 22 | ☆ | ☆ | 11,3 | WCB-1250 |
| | 13 | WHC-2000 | 119,6 | 381 | 25 | 31 | 31 | 22 | ☆ | 50 | 50 | 50 | 19 | ☆ | ☆ | 10,4 | WCB-2000 |
| | 3 | WHC-3380 | 65,5 | 482 | ☆ | ☆ | ☆ | ☆ | ☆ | 76 | 76 | ☆ | ☆ | 85 | 85 | 9,1 | WCB-3380 |
| | 8 | WHC-4000 | 137,7 | 609 | ☆ | ☆ | ☆ | ☆ | ☆ | 89 | 89 | ☆ | ☆ | 101 | 101 | 14,5 | WCB-4000 |
| Dbl.-Act. | 20 | WHR-1250 | 122,9 | 419 | 31 | 31 | 31 | 31 | 25 | 31 | 31 | 31 | 22 | ☆ | ☆ | 11,8 | WCB-1250 |

* Available in sets with P-392 Hand Pump, P-392FP Foot Pump or PATG-1102N Turbo Air Pump.

☆ Will not cut designated material.

Self-Contained Hydraulic Cutters

▼ Shown from left to right: WMC-2000, WMC-750



- Rotating heads for operator convenience
- Guillotine action for smooth cutting operation
- Carrying bag included for easy carrying and tool protection
- Velcro straps to secure handles on larger models for easy carry
- Spring return for easy operation
- Light weight self-contained tool, can be used anywhere.

WMC Series



Capacity:

3 - 20 ton

Cutting Capacity:

Ø 14 - 85 mm



Replacement Blades

60-62HRc hardened replacement blades.

| For Cutter Model Number | Order Blades Model Number |
|-------------------------|---------------------------|
| WMC-580 | WCB-750 |
| WMC-750 | WCB-750 |
| WMC-1000 | WCB-1000 |
| WMC-1250 | WCB-1250 |
| WMC-1580 | WCB-1580 |
| WMC-2000 | WCB-2000 |
| WMC-3380 | WCB-3380 |



CAUTION !:

A "☆" in the charts on these pages means that this hydraulic cutter is not designed to cut this size or type of material. Any attempt to do so may result in personal injury and damage to the unit and will void the warranty.

▼ Selection Chart Maximum Cutting Capacities (Ø in mm)

| Capacity ton | Model Number | Length (mm) | Steel Wire Rope, Hempcore or IWRC 6x7 6x12 6x19 | Round Bar | | | | Wire Strand | | | | | Cable | | Weight (kg) |
|-----------------|--------------|----------------|--------------------------------------------------------------------|--------------------|----------------------|------------------|-----------------|--------------------------|----------------------------|-------------------|------------------------|------------------------|---------------------|---------------------------|----------------|
| | | | | Copper Wire or Bar | Aluminum Wire or Bar | Soft Steel Bolts | Reinforcing Bar | Bare Copper Wire Strands | Bare Aluminum Wire Strands | ACSR Wire Strands | Guy Steel Wire Strands | Guy Steel Wire Strands | Telephone Cable CPP | Underground Cable (Power) | |
| 4 | WMC-580 | 381 | 16 | 16 | 16 | 16 | 10 | 16 | 16 | 16 | 14 | 14 | ☆ | ☆ | 3,6 |
| 4 | WMC-750 | 381 | 17 | 19 | 19 | 17 | 13 ** | 19 | 19 | 19 | 14 | 14 | ☆ | ☆ | 3,6 |
| 20 | WMC-1000 * | 679 | ☆ | 19 | 19 | 19 | 19 | ☆ | ☆ | ☆ | ☆ | ☆ | ☆ | ☆ | 11,3 |
| 20 | WMC-1250 | 679 | 31 | 28 | 31 | 31 | 22 | 31 | 31 | 31 | 22 | 22 | ☆ | ☆ | 10,4 |
| 6 | WMC-1580 | 558 | 19 | 19 | 19 | 19 | ☆ | 38 | 38 | 38 | 16 | 16 | ☆ | ☆ | 6,8 |
| 13 | WMC-2000 | 628 | 25 | 31 | 31 | 22 | ☆ | 50 | 50 | 50 | 19 | 19 | ☆ | ☆ | 10,9 |
| 3 | WMC-3380 | 660 | ☆ | ☆ | ☆ | ☆ | ☆ | 76 | 76 | ☆ | ☆ | ☆ | 85 | 85 | 10,0 |

* Cuts 12 mm alloy chain grade 70 (type G7 transport or tie-down) or grade 80 (for overhead lifting applications).

** Low Alloy. ☆ Will not cut designated material.

STB-Series, Pipe Bender Sets

▼ Shown: STB-101H



Quick, Safe and Wrinkle-free Bending




'One Shot' and 'Sweep'

One shot shoes give up to a 90° bend without resetting.





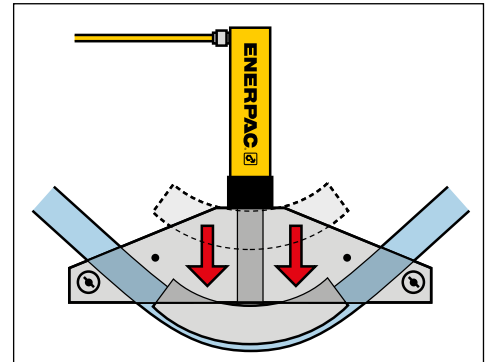



Sweep shoes are used where increasing radii are required for multiple parallel pipe installations.

- Makes smooth, wrinkle-free bends
- Sets include genuine Enerpac cylinder, hose and manual, air or electric pump
- Sets are also available without hydraulics
- Bending shoes and bending frame are lightweight, heat-treated aluminium
- All sets include sturdy steel storage case
- All sets include BZ-12091 angle indicator for accurate bending
- BZ-12377 Shoe Lock Pin included in every set
- Eject-O-Matic™ benders (STB-202 models) have double-acting cylinder to eject pipe from the bending shoe.



▲ Typical one shot bending operation.

▼ SELECTION CHART

| Pipe Range Nominal Size (inch) | | Bender Set Model Number | Hand Pump * | Air Pump * | Electric Pump * | | Cylinder * | Hose * | Saddle * |  (kg) |
|--------------------------------------|-----------|-------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------|
| One Shot | Sweep | |  |  |  |  |  |  |  | |
| 1/2 - 2 | - | STB-101X | - | - | - | - | - | - | A-12 | 40 |
| | | STB-101N | - | - | - | - | RC-1010 | HC-7206 | A-12 | 48 |
| | | STB-101H | P-392 | - | - | - | RC-1010 | HC-7206 | A-12 | 52 |
| | | STB-101A | - | PATG-1102N | - | - | RC-1010 | HC-7206 | A-12 | 54 |
| | | STB-101E | - | - | PUJ-1200E ²⁾ | - | RC-1010 | HC-7206 | A-12 | 57 |
| 1 - 2 | 2 1/2 - 4 | STB-221X | - | - | - | - | - | - | A-29 | 104 |
| | | STB-221N | - | - | - | - | RC-2510 | HC-7206 | A-29 | 119 |
| | | STB-221H | P-80 | - | - | - | RC-2510 | HC-7206 | A-29 | 130 |
| 1 1/4 - 4 | - | STB-202X ¹⁾ | - | - | - | - | - | - | A-29 | 143 |
| | | STB-202N ¹⁾ | - | - | - | - | RR-3014 | HC-7206 (2x) | A-29 | 174 |
| | | STB-202E ¹⁾ | - | - | - | ZU4408SE ²⁾ | RR-3014 | HC-7206 (2x) | A-29 | 212 |

* See corresponding sections in this catalog for more detailed specifications.

¹⁾ Eject-O-Matic™

²⁾ For 115 volt applications replace the last digit of Set Model Number and pump from 'E' to 'B'.

Pipe Bender Sets

| Nominal Pipe Size (inch) | Wall Thickness (mm) | Schedule Pipe * | Pipe Bend Inside Radius (inch) | STB-101 | STB-221 ø 1 - 2" One Shot | STB-202 | One Shot Bending Shoe Model Number | Sweep Bending Shoe Model Number |
|-----------------------------|------------------------|-----------------|-----------------------------------|----------------------|---------------------------------|-----------------------|------------------------------------|---------------------------------|
| | | | | ø ½ - 2" One Shot | ø 2¼ - 4" Sweep | ø 1¼ - 4" One Shot | | |
| ½ | 2,8 | 40 | 27/8 | Yes | - | - | BZ-12011 | - |
| | 3,7 | 80 | | Yes | - | - | | |
| | 4,7 | 160 | | WS | - | - | | |
| | 7,5 | DEH | | WS | - | - | | |
| ¾ | 2,9 | 40 | 4 | Yes | - | - | BZ-12021 | - |
| | 3,9 | 80 | | Yes | - | - | | |
| | 5,5 | 160 | | WS | - | - | | |
| | 7,8 | DEH | | WS | - | - | | |
| 1 | 3,4 | 40 | 5½ | Yes | Yes | - | BZ-12031 | - |
| | 4,5 | 80 | | Yes | Yes | - | | |
| | 6,4 | 160 | | WS | WS | - | | |
| | 9,1 | DEH | | - | WS | - | | |
| 1¼ | 3,6 | 40 | 67/16 | Yes | Yes | Yes | BZ-12041 | - |
| | 4,9 | 80 | | Yes | Yes | Yes | | |
| | 6,4 | 160 | | WS | WS | Yes | | |
| | 8,7 | DEH | | - | WS | WS | | |
| 1½ | 3,7 | 40 | 75/16 | Yes | Yes | Yes | BZ-12051 | - |
| | 5,1 | 80 | | Yes | Yes | Yes | | |
| | 7,1 | 160 | | WS | WS | Yes | | |
| | 10,2 | DEH | | - | WS | WS | | |
| 2 | 3,9 | 40 | 85/16 | - | Yes | Yes | BZ-12061 | - |
| | 5,5 | 80 | | - | Yes | Yes | | |
| | 8,7 | 160 | | - | WS | Yes | | |
| 2½ | 5,2 | 40 | 9½ | - | Yes | Yes | BZ-12341 | BZ-12382 |
| | 7,0 | 80 | | - | WS | Yes | | |
| | 9,5 | 160 | | - | WS | Yes | | |
| 3 | 5,5 | 40 | 11¼ | - | Yes | Yes | BZ-12351 | BZ-12383 |
| | 7,6 | 80 | | - | WS | Yes | | |
| 3½ | 5,7 | 40 | 15½ | - | Yes | Yes | BZ-12391 | BZ-12384 |
| | 8,1 | 80 | | - | WS | Yes | | |
| 4 | 6,0 | 40 | 17¾ | - | Yes | Yes | BZ-12392 | BZ-12385 |
| | 8,6 | 80 | | - | - | Yes | | |

* Schedule Pipe: 40 = Standard; 80 = Extra Heavy; 160 = Double Extra Heavy;
DEH = Double Extra Heavy (slightly thicker than 160);
WS = Can be bent using wider spacing for swivel shoes.

STB Series



Nominal Pipe Size:

ø ½ - 4 inch

Maximum Bending:

90°

Maximum Operating Pressure:

700 bar



All bender sets are designed to bend mild steel pipe. For other material please consult Enerpac.

| Frame Assembly | Pivot Pins (2x) | Pivot Shoes (2x) | Bending Shoes included (Shoes with ³⁾ are Sweep, all other shoes are One Shot) | | | | | | | | | Bender Set Model Number | |
|----------------|-----------------|------------------|----------------------------------------------------------------------------------------------|----------|----------|----------|------------------------|------------------------|------------------------|------------------------|------------------------|-------------------------|----------|
| | | | | | | | | | | | | | |
| BZ-12371 | BZ-12375 | BZ-12071 | BZ-12011 | BZ-12021 | BZ-12031 | BZ-12041 | BZ-12051 | BZ-12061 | - | - | STB-101X | | |
| | | | | | | | | | | | | STB-101N | |
| | | | | | | | | | | | | | STB-101H |
| | | | | | | | | | | | | | STB-101A |
| | | | | | | | | | | | | | STB-101E |
| BZ-12372 | BZ-12376 | BZ-13401 | BZ-12031 | BZ-12041 | BZ-12051 | BZ-12061 | BZ-12382 ³⁾ | BZ-12383 ³⁾ | BZ-12384 ³⁾ | BZ-12385 ³⁾ | STB-221X | | |
| | | | | | | | | | | | STB-221N | | |
| | | | | | | | | | | | | STB-221H | |
| BZ-12374 | BZ-12376 | BZ-13401 | - | BZ-12041 | BZ-12051 | BZ-12061 | BZ-12341 | BZ-12351 | BZ-12391 | BZ-12392 | STB-202X ¹⁾ | | |
| | | | | | | | | | | | STB-202N ¹⁾ | | |
| | | | | | | | | | | | | STB-202E ¹⁾ | |

Enerpac's Bolting Solutions cater to the complete bolting work-flow, ensuring joint integrity in a variety of applications throughout the industry:

Joint Assembly

From simple pipe alignment to complex joint positioning of large structural assemblies, our comprehensive line of joint assembly products range from hydraulic and mechanical alignment tools to synchronized PLC-controlled multi-point positioning systems.

Controlled Tightening

Enerpac offers a variety of controlled tightening options to best meet the requirements of your application. From mechanical torque multipliers to hydraulic, pneumatic and electric square drive wrenches and from low profile torque wrenches to interconnectable bolt tensioning tools; we offer the products you need for accurate and simultaneous tightening of multiple bolts.

Joint Separation

Enerpac also provides hydraulic nut splitters and a variety of mechanical and hydraulic spreading tools for joint separation during inspection, maintenance and decommissioning operations.

High quality bolting solutions from the brand you can trust.

See how Enerpac can make your bolting work-flow more accurate, safer and efficient.



Bolting Integrity Software

Visit www.enerpac.com to access our free on-line bolting software application and obtain information on tool selection, bolt load calculations and tool pressure settings. A combined application data sheet and joint completion report is also available.






















Torque Tightening

See our 'Yellow Pages' for information on torque tightening. See our Bolting Safety Instructions on enerpac.com.

Page: **276**



Bolting Tools & Pumps Section Overview

| Applications | Capacity | Tool type and functions | Series | Page | |
|----------------------------------------|----------------------------------------------|----------------------------------------------------------------------------------------------|--------------|---------------------------------------------------------------------------------------|----------------|
| Controlled Tightening and Loosening | 1015 - 10.845 Nm 750 - 8000 Ft.lbs | Manual Torque Multipliers | E |  | 184 ▶ |
| | 1952 - 35.455 Nm 1440 - 26.150 Ft.lbs | Square Drive Hydraulic Torque Wrenches Rigid steel design & maximum versatility | S |  | 186 ▶ |
| | 19 - 155 mm ¾ - 6⅞ inch | Heavy-Duty Impact Sockets Square drive | BSH |  | 190 ▶ |
| | 2766 - 47.454 Nm 2040 - 35.000 Ft.lbs | Hexagon Hydraulic Torque Wrenches Ultra-Slim Stepped Width Cassettes | W W-SL |  | 192 ▶ 202 ▶ |
| | 5762 Nm 4250 Ft.lbs | Roller Cassette Torque Wrench Versatile high performance limited access tools | WCR |  | 204 ▶ |
| | 1356 - 8135 Nm 1000 - 6000 Ft.lbs | Pneumatic Torque Wrenches Electric Torque Wrenches | PTW ETW |  | 206 ▶ 208 ▶ |
| | | Selection Matrix Torque Wrenches - Pumps - Hoses | |  | 212 ▶ |
| | Flow: 0,34 l/min Power: 0,37 kW | Portable Electric Torque Wrench Pumps Compact Economy | PME PMU |  | 213 ▶ |
| | Flow: 0,50 l/min Power: 0,75 kW | Electric Torque Wrench Pumps Lightweight | TQ |  | 214 ▶ |
| | Flow: 0,90 l/min Power: 1,25 kW | Portable Electric Torque Wrench Pumps Z-Class innovation | ZU4T |  | 216 ▶ |
| | Flow: 0,82-1,64 l/min Power: 1,1 - 2,2 kW | Electric Torque Wrench Pumps Z-Class innovation | ZE4T ZE5T |  | 220 ▶ |
| | Flow: 0,90 l/min Air: 2840 l/min | Air Driven Torque Wrench Pumps Z-Class innovation | ZA4T |  | 222 ▶ |
| | Flow: 0,13 l/min Power: 1,25 kW | Electric Tensioning Pumps & Accessories Z-Class Tensioning pumps upto 1500 bar | ZUTP |  | 226 ▶ |
| | Flow: 0,07 l/min Air: 590 l/min | Ultra-High Pressure Air Pump Upto 1500 bar | ATP |  | 228 ▶ |
| Joint Assembly and Joint Separation | 10 - 75 mm hexagon 70 - 130 mm hexagon | Hydraulic Nut Cutters | NC NS |  | 229 ▶ 230 ▶ |
| | 5 - 10 ton (45 - 101 kN) | Pin-type Hydraulic Flange Spreaders | FS |  | 232 ▶ |
| | 8 - 14 ton (72 - 125 kN) | Step-type Industrial Spreaders Mechanical and Hydraulic | FSH FSM |  | 233 ▶ |
| | 1 - 9 ton (10 - 90 kN) | Flange Alignment Tools Mechanical and Hydraulic | ATM |  | 234 ▶ |
| | ∅ 1 - 12 inch flanges | QuickFace – Mechanical Pipe Flange Face Tool Refacing of flat pipe flange surfaces | FF |  | 236 ▶ |

▼ Shown from left to right: E291, E393, E494



- High-efficiency planetary gear sets achieve high output torque from low input torque
- Operator protected by anti-backlash device
- Torque multiplier accuracy $\pm 5\%$
- Reversible, tighten or loosen bolts
- Reaction bar or reaction plate style
- Angle-of-turn protractor standard on E300-Series models
- Reaction plate models offer increased versatility with reaction point locations
- E300 and E400-Series have replaceable shear drives, providing overload protection of internal power train
- One replacement shear drive is included with each E300 and E400-Series models.

Accurate, Efficient Torque Multiplication

When accurate make-up or break-out of stubborn fasteners requires high torque



Typical Torque Multiplier Applications

- Locomotives
- Power plants
- Pulp and paper mills
- Refineries
- Chemical plants
- Mining and construction
- Off-road equipment
- Shipyards
- Cranes.



◀ Enerpac Reaction Bar Torque Multiplier E393 used to manually torque bolts up to 4300 Nm.

▼ SELECTION CHART

| Torque Multiplier Type | Nominal Torque Output | | Model Number |
|---------------------------|-----------------------|----------|--------------|
| | (Nm) | (Ft.lbs) | |
| Reaction Bar Multiplier | 1015 | 750 | E290PLUS |
| | 1355 | 1000 | E291 |
| | 1625 | 1200 | E391 |
| | 2980 | 2200 | E392 |
| | 4340 | 3200 | E393 |
| Reaction Plate Multiplier | 2980 | 2200 | E492 |
| | 4340 | 3200 | E493 |
| | 6780 | 5000 | E494 |
| | 10845 | 8000 | E495 |



Manual Torque Multipliers

Enerpac manual torque multipliers provide efficient torque multiplication in wide clearance applications and when external power sources are not available.

Manual torque multipliers are used in most industrial, construction, and equipment maintenance applications. Hydraulic torque wrenches are better suited for tight tolerance, flange and repetitive bolting applications.

Use Reaction Bar Models:

- Where space is limited,
- Where multiple reaction points are available,
- when portability is desirable.

Use Reaction Plate Models:

- Above 4300 Nm output torque,
- On flanges and applications where neighbouring bolt or nut is available to react against
- When extreme reaction forces are generated.

E Series



Nominal Torque Output:

1015 - 10.845 Nm

Torque Ratio:

3:1 - 52:1


Output Ratio Accuracy:

± 5 %




CAUTION!

Never use impact air tools for power driving torque multipliers. Torque multiplier drive train damage will occur.




Selector Pawl

Models with anti-backlash protection have directional selector pawls. Set the pawl for clockwise or counter-clockwise rotation.




Angle-of-Turn Protractor

E391, E392 and E393 models include an angle-of-turn protractor (scale) to tighten fasteners using a "torque turn" method. Allows accurate measuring a specific number of degrees of rotation.




Shearable Square Drive

Provides overload protection on E300- and E400-series multiplier's power train by shearing when the rated capacity of the tool is exceeded. Internal shear pin prevents tool from falling off bolt.

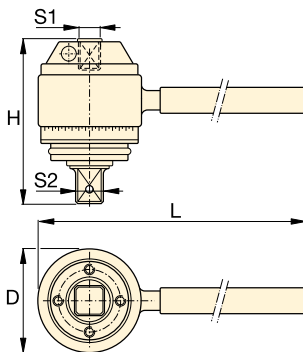

Reaction Bar Type ¹⁾

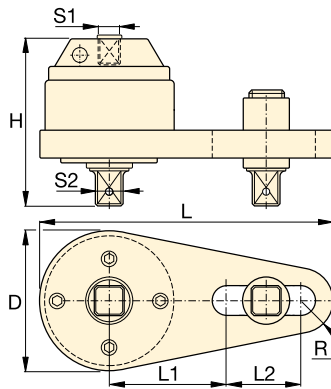

Reaction Plate Type ¹⁾



Hydraulic Torque Wrenches

Enerpac offers a complete range of square drive and hexagon cassette torque wrenches.

Page: 186



BSH-Series Sockets

Heavy-Duty Impact Sockets for power driven torqueing equipment.

Page: 190

| Input Torque ²⁾ | Torque Ratio | Input Female Square Drive | Output Male Square Drive | | Over-load protection | Anti-Backlash | Dimensions (mm) | | | | | | Model Number | |
|----------------------------|--------------|---------------------------|--------------------------|-----------------------------------|----------------------|---------------|-----------------|-----|-----|-----|-----|----|--------------|----------|
| | | | S2 (inch) | Replaceable Shear Drive Model Nr. | | | D | H | L | L1 | L2 | R | | |
| 338 (Nm) / 250 (Ft.lbs) | 3 : 1 | 1/2 (inch) | 3/4 (inch) | – | No | No | 71 | 84 | 218 | – | – | – | 1,8 (kg) | E290PLUS |
| 451 (Nm) / 333 (Ft.lbs) | 3 : 1 | 1/2 (inch) | 3/4 (inch) | – | No | No | 71 | 84 | 442 | – | – | – | 2,5 (kg) | E291 |
| 271 (Nm) / 200 (Ft.lbs) | 6 : 1 | 1/2 (inch) | 3/4 (inch) | E391SDK | Yes | No | 100 | 102 | 498 | – | – | – | 6,3 (kg) | E391 |
| 219 (Nm) / 162 (Ft.lbs) | 13,6 : 1 | 1/2 (inch) | 1 (inch) | E392SDK | Yes | Yes | 103 | 146 | 498 | – | – | – | 6,9 (kg) | E392 |
| 234 (Nm) / 173 (Ft.lbs) | 18,5 : 1 | 1/2 (inch) | 1 (inch) | E393SDK | Yes | Yes | 103 | 165 | 498 | – | – | – | 8,3 (kg) | E393 |
| 219 (Nm) / 162 (Ft.lbs) | 13,6 : 1 | 1/2 (inch) | 1 (inch) | E392SDK | Yes | Yes | 124 | 140 | 356 | 140 | 124 | 32 | 7,8 (kg) | E492 |
| 234 (Nm) / 173 (Ft.lbs) | 18,5 : 1 | 1/2 (inch) | 1 (inch) | E393SDK | Yes | Yes | 124 | 163 | 356 | 140 | 124 | 32 | 10,6 (kg) | E493 |
| 256 (Nm) / 189 (Ft.lbs) | 26,5 : 1 | 1/2 (inch) | 1 1/2 (inch) | E494SDK | Yes | Yes | 143 | 222 | 378 | 178 | 89 | 42 | 15,4 (kg) | E494 |
| 208 (Nm) / 154 (Ft.lbs) | 52 : 1 | 1/2 (inch) | 1 1/2 (inch) | E495SDK | Yes | Yes | 148 | 273 | 386 | 178 | 89 | 48 | 22,8 (kg) | E495 |

¹⁾ E200 and E400-series do not have an Angle-of-Turn Protractor (scale).

²⁾ User must verify manual torque wrench accuracy prior to use to ensure accurate final output torque.

▼ Shown: S3000PX



Setting New Standards in Safety, Simplicity and Performance

Safety and Performance

- Compact, high-strength uni-body construction provides a small operating radius without sacrificing endurance
- 35° rotation angle and rapid return stroke for fast operation
- Tough manifold design with added safety feature for enhanced operator safety

Simplicity

- 360° click-on reaction arm with quick release lever provides easier handling, even with gloves on
- Includes robust handle which mounts on both sides of tool for extra maneuverability
- Push button square drive release for quickly reversing the square drive for tightening or loosening

Versatility

- Available with optional enhanced tilt and swivel TSP300 manifold for horizontal and vertical maneuverability, with greater durability ¹⁾

Accuracy

- Constant torque output provides accuracy of ±3% across full stroke
- Optional Angle-of-Turn Indicator provides measurement of rotation.



Two Handle Styles

Robust angled positioning handle comes standard with every S-Series (X-Edition) tool. Straight positioning handles are available as accessories.

| Compatible S-Series (X-Edition) wrenches | Model Nr. Angled positioning handles (standard) | Model Nr. Straight positioning handles (optional) |
|------------------------------------------|-------------------------------------------------|---------------------------------------------------|
| S1500X, S3000X | SWH6A | SWH6S |
| S6000X, S11000X | SWH10A | SWH10S |
| S25000X | SWH10EA ²⁾ | |

²⁾ SWH10EA is an eyebolt handle.



TSP - Pro Series Swivel

The optional TSP300 tilt and swivel manifold with robust interlocking design provides 360° X-axis rotation and 160° Y-axis rotation.

How to Order ¹⁾

Factory fitted to S-Series (X-Edition) wrenches: Insert a "P" prior to the "X" in the tool model number, example: **S1500PX**.

Order as an accessory using the model number: **TSP300**, which can be fitted to existing S-Series (X-Edition) wrenches. Includes male and female couplers.

Page: 189



ATEX declared. Calibration certificate included.


All X-edition tools are CE - ATEX declared and are shipped complete with a calibration certificate.



¹⁾ TSP300 is designed for X-Edition tools only, and is not compatible with previous edition tools. For replacement components for existing tools, refer to repair sheet on www.enerpac.com

X-Edition, Square Drive Torque Wrenches

Standard are: ① ② ⑥ ⑧
Other items are optional.

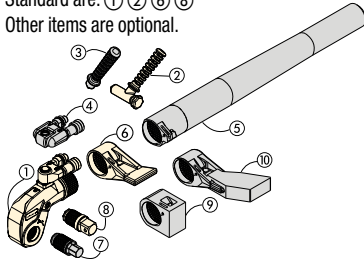

- ① Drive Unit
- ② Angeled Positioning Handle
- ③ Straight Positioning Handle
- ④ Pro Series Swivel
- ⑤ Reaction Tube Extension
- ⑥ Standard Reaction Arm
- ⑦ Allen Drive
- ⑧ Square Drive
- ⑨ Short Reaction Arm
- ⑩ Extended Reaction Arm

Select the Right Torque
Choose your Enerpac Torque Wrench using the untightening rule of thumb:
Loosening torque equals about 250% of tightening torque.

S Series X-Edition




Nominal Torque Output:
35.455 Nm

Square Drive Range:
3/4 - 2 1/2 inch

Nose Radius:
25 - 64 mm

Maximum Operating Pressure:
690 bar

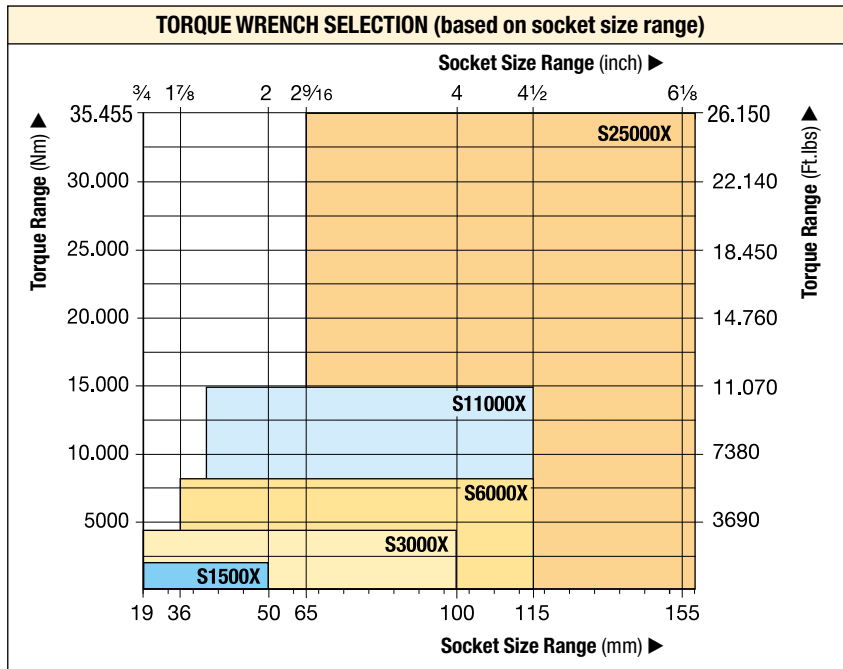

Accessory Options

A full list of optional accessories is available for maximum versatility.


Page: **189**

▼ The rigid steel design of the S-Series torque wrenches provides durability, reliability and safety.



Use only Heavy Duty Impact Sockets
For power driven torquing equipment, according to ISO2725 and ISO1174; DIN 3129 and DIN 3121 or ASME-B107.2/1995.

Page: **190**

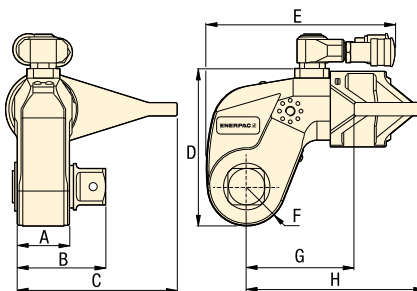

| Nominal Torque at 690 bar | | Minimum Torque at 69 bar | | Square Drive Size (inch) | | Angle-of-Turn Model Nr. (optional) | Torque Wrench Model Number * | Dimensions (mm) | | | | | | | | Weight (kg) |
|---------------------------|----------|--------------------------|----------|----------------------------------|----------------------|------------------------------------|------------------------------|-----------------|-----|-----|-----|-----|----|-----|-----|-------------|
| (Nm) | (Ft.lbs) | (Nm) | (Ft.lbs) | Model Nr. (included with wrench) | Model Nr. (optional) | | A | B | C | D | E | F | G | H | | |
| 1952 | 1440 | 195 | 144 | 3/4 | SD15-012 | AOT15 | S1500X | 39 | 65 | 108 | 97 | 136 | 25 | 70 | 129 | 3,2 |
| 4373 | 3225 | 438 | 323 | 1 | SD30-100 | AOT30 | S3000X | 48 | 78 | 135 | 128 | 173 | 33 | 90 | 161 | 5,6 |
| 8338 | 6150 | 834 | 615 | 1 1/2 | SD60-108 | AOT60 | S6000X | 55 | 92 | 169 | 157 | 192 | 40 | 110 | 188 | 9,2 |
| 15.151 | 11.175 | 1516 | 1118 | 1 1/2 | SD110-108 | AOT110 | S11000X | 72 | 114 | 197 | 190 | 228 | 50 | 133 | 229 | 15,8 |
| 35.455 | 26.150 | 3545 | 2615 | 2 1/2 | SD250-208 | AOT250 | S25000X | 89 | 143 | 246 | 244 | 287 | 64 | 182 | 295 | 32,2 |

* To order a S-Series (X-edition) torque wrench fitted with a TSP300 tilt and swivel manifold, insert a "P" prior to the "X" in the tool model number, example: **S1500PX**.

Maximum Torque at 690 bar:

35.455 Nm

Hexagon Size Allen Drive:



½ - 2¼ inch

Hexagon Size Allen Drive:

14 - 85 mm

For
S
Series



| Torque Wrench  | Optional Allen Drives, Imperial | | | | Optional Allen Drives, Metric | | | | Short Reaction Arm for Allen Drives  | | |
|---------------------------------------------------------------------------------------------------|--------------------------------------|------------------------|-------------------|--------------------|------------------------------------|------------------------|------------------|--------------------|----------------------------------------------------------------------------------------------------------------------------|-------------------------------|-----|
| | Hexagon Size ¹⁾ (inch) | Maximum Torque (Nm) | Model Number | Dim. B1 (mm) | Hexagon Size ¹⁾ (mm) | Maximum Torque (Nm) | Model Number | Dim. B1 (mm) | Model Number | Dimensions (mm) C1 H1 | |
| S1500X (1952 Nm) | ½ | 481 | SDA15-008 | 66 | 14 | 644 | SDA15-14 | 66 | SRA15X | 67,5 | 74 |
| | 5/8 | 936 | SDA15-010 | 67 | 17 | 1152 | SDA15-17 | 68 | | | |
| | ¾ | 1620 | SDA15-012 | 71 | 19 | 1607 | SDA15-19 | 70 | | | |
| | 7/8 | 1952 | SDA15-014 | 74 | 22 | 1952 | SDA15-22 | 73 | | | |
| | 1 | 1952 | SDA15-100 | 77 | 24 | 1952 | SDA15-24 | 74 | | | |
| S3000X (4373 Nm) | 5/8 | 936 | SDA30-010 | 77 | 17 | 1152 | SDA30-17 | 77 | SRA30X | 80,0 | 74 |
| | ¾ | 1620 | SDA30-012 | 80 | 19 | 1607 | SDA30-19 | 79 | | | |
| | 7/8 | 2569 | SDA30-014 | 83 | 22 | 2488 | SDA30-22 | 82 | | | |
| | 1 | 3830 | SDA30-100 | 86 | 24 | 3234 | SDA30-24 | 84 | | | |
| | 1 1/8 | 4373 | SDA30-102 | 88 | 27 | 4373 | SDA30-27 | 85 | | | |
| | 1 1/4 | 4373 | SDA30-104 | 89 | 30 | 4373 | SDA30-30 | 87 | | | |
| | - | - | - | - | 32 | 4373 | SDA30-32 | 88 | | | |
| S6000X (8338 Nm) | 5/8 | 936 | SDA60-010 | 85 | 17 | 1152 | SDA60-17 | 86 | SRA60X | 91,5 | 89 |
| | ¾ | 1620 | SDA60-012 | 89 | 19 | 1607 | SDA60-19 | 88 | | | |
| | 7/8 | 2569 | SDA60-014 | 92 | 22 | 2488 | SDA60-22 | 91 | | | |
| | 1 | 3830 | SDA60-100 | 95 | 24 | 3234 | SDA60-24 | 93 | | | |
| | 1 1/8 | 5457 | SDA60-102 | 97 | 27 | 4603 | SDA60-27 | 94 | | | |
| | 1 1/4 | 7484 | SDA60-104 | 98 | 30 | 6311 | SDA60-30 | 96 | | | |
| | - | - | - | - | 32 | 7660 | SDA60-32 | 97 | | | |
| S11000X (15.151 Nm) | 1 1/4 | 7484 | SDA110-104 | 115 | 30 | 6311 | SDA110-30 | 112 | SRA110X | 127,5 | 106 |
| | 1 3/8 | 9958 | SDA110-106 | 117 | 32 | 7660 | SDA110-32 | 114 | | | |
| | 1 1/2 | 12.928 | SDA110-108 | 118 | 36 | 10.901 | SDA110-36 | 117 | | | |
| | 1 5/8 | 15.151 | SDA110-110 | 122 | 41 | 15.151 | SDA110-41 | 121 | | | |
| | 1 3/4 | 15.151 | SDA110-112 | 125 | 46 | 15.151 | SDA110-46 | 127 | | | |
| S25000X (35.455 Nm) | 1 1/2 | 12.928 | SDA250-108 | 141 | 36 | 10.901 | SDA250-36 | 140 | SRA250X | 158,5 | 135 |
| | 1 5/8 | 16.433 | SDA250-110 | 145 | 41 | 16.107 | SDA250-41 | 144 | | | |
| | 1 3/4 | 20.520 | SDA250-112 | 148 | 46 | 22.744 | SDA250-46 | 148 | | | |
| | 1 7/8 | 25.245 | SDA250-114 | 149 | 50 | 29.211 | SDA250-50 | 151 | | | |
| | 2 | 30.635 | SDA250-200 | 151 | 55 | 35.455 | SDA250-55 | 154 | | | |
| | 2 1/4 | 35.455 | SDA250-204 | 154 | 60 | 35.455 | SDA250-60 | 158 | | | |
| | - | - | - | - | 65 | 35.455 | SDA250-65 | 161 | | | |
| | - | - | - | - | 70 | 35.455 | SDA250-70 | 164 | | | |
| | - | - | - | - | 75 | 35.455 | SDA250-75 | 168 | | | |
| | - | - | - | - | 85 | 35.455 | SDA250-85 | 175 | | | |

¹⁾ See page 275 for table of hexagon sizes of bolts, nuts and related thread diameters.


Accessories for S-Series, X-Edition Wrenches

TSP RTEX SRSX Series



TSP-Series, Pro Series Swivel


- Robust interlocking design
- 360° X-axis and 160° Y-axis rotation
- Increases tool fit in restricted access areas
- Simplifies hose placement
- Includes male and female couplers

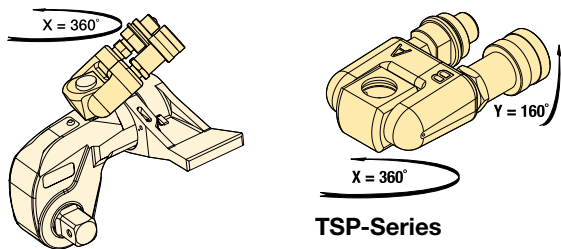

| For Torque Wrench Model Number | Model Number ¹⁾ | Maximum Pressure (bar) | Weight (kg) |
|------------------------------------------|----------------------------|------------------------|-------------|
| S1500X, S3000X, S6000X, S11000X, S25000X | TSP300 | 690 | 0,2 |

¹⁾ To order a S-Series (X-edition) torque wrench fitted with a TSP300 tilt and swivel manifold, insert a "P" prior to the "X" in the tool model number, example: **S1500PX**. TSP300 is designed for X-Edition tools only, and is not compatible with standard edition tools. For replacement components for existing tools, refer to repair sheet on www.enerpac.com

RTEX-Series, Reaction Tube Extensions

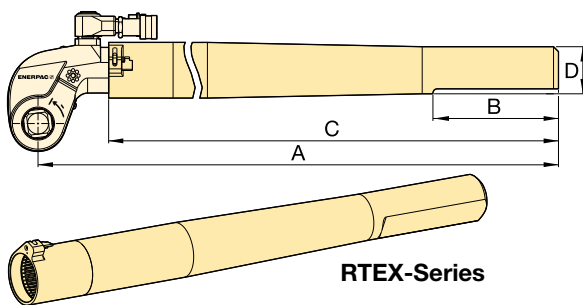


- Full torque rated
- Increases tool fit in restricted access areas

| For Torque Wrench Model Number | Model Number | Dimensions (mm) | | | | Weight (kg) * |
|--------------------------------|--------------|-----------------|-----|-----|-----|---------------|
| | | A | B | C | D | |
| S1500X | RTE15X | 706 | 152 | 636 | 58 | 4,6 |
| S3000X | RTE30X | 733 | 152 | 647 | 57 | 5,5 |
| S6000X | RTE60X | 747 | 152 | 659 | 65 | 7,7 |
| S11000X | RTE110X | 769 | 152 | 675 | 76 | 11,2 |
| S25000X | RTE250X | 813 | 152 | 685 | 100 | 17,3 |

* Weights indicated are for the accessories only and do not include the wrench.

SRSX-Series, Extended Reaction Arms

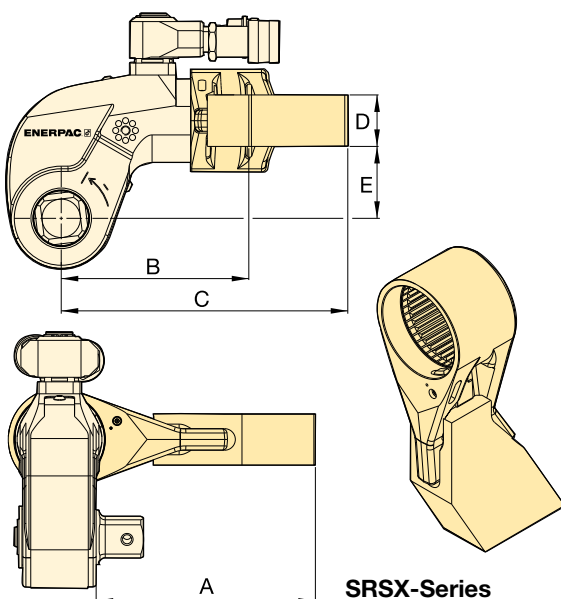

- Lightweight interchangeable design

| For Wrench Model | Max. Torque (Nm) | Model Number | Dimensions (mm) | | | | | Weight (kg) * |
|------------------|------------------|--------------|-----------------|-----|-----|----|-----|---------------|
| | | | A | B | C | D | E | |
| S1500X | 1801 | SRS151X | 94 | 86 | 127 | 24 | 34 | 0,8 |
| | 1641 | SRS152X | 119 | 97 | 138 | 24 | 34 | 1,0 |
| | 1533 | SRS153X | 145 | 109 | 148 | 24 | 34 | 1,2 |
| S3000X | 3918 | SRS301X | 111 | 106 | 168 | 34 | 48 | 1,6 |
| | 3712 | SRS302X | 137 | 117 | 182 | 34 | 48 | 2,0 |
| | 3574 | SRS303X | 162 | 132 | 198 | 34 | 48 | 2,5 |
| S6000X | 7842 | SRS601X | 138 | 128 | 192 | 39 | 62 | 2,3 |
| | 7454 | SRS602X | 163 | 144 | 207 | 39 | 62 | 2,7 |
| | 7175 | SRS603X | 189 | 159 | 222 | 39 | 62 | 3,4 |
| S11000X | 14.650 | SRS1101X | 149 | 157 | 232 | 46 | 76 | 4,4 |
| | 13.957 | SRS1102X | 175 | 172 | 247 | 46 | 76 | 5,1 |
| | 13.391 | SRS1103X | 200 | 187 | 261 | 46 | 76 | 5,8 |
| S25000X | 33.538 | SRS2501X | 183 | 209 | 295 | 50 | 100 | 7,6 |
| | 32.049 | SRS2502X | 208 | 222 | 310 | 50 | 100 | 8,4 |
| | 30.750 | SRS2503X | 233 | 236 | 326 | 50 | 100 | 10,0 |

* Weights indicated are for the accessories only and do not include the wrench.

BSH-Series, Heavy-Duty Sockets

- Heavy-duty impact sockets
- Supplied with "Pin and Ring"

METRIC SOCKETS

| ¾" Square Drive | | 1" Square Drive | | 1½" Square Drive | | 2½" Square Drive | |
|-----------------|----------|-----------------|----------|------------------|----------|------------------|----------|
| Model Number | A/F (mm) | Model Number | A/F (mm) | Model Number | A/F (mm) | Model Number | A/F (mm) |
| BSH7519 | 19 | BSH1019 | 19 | BSH1536 | 36 | BSH2565 | 65 |
| BSH7524 | 24 | BSH1024 | 24 | BSH15163 | 41 | BSH2570 | 70 |
| BSH7527 | 27 | BSH1027 | 27 | BSH1546 | 46 | BSH2575 | 75 |
| BSH7530 | 30 | BSH1030 | 30 | BSH1550 | 50 | BSH2580 | 80 |
| BSH7532 | 32 | BSH1032 | 32 | BSH1555 | 55 | BSH2585 | 85 |
| BSH7536 | 36 | BSH1036 | 36 | BSH1560 | 60 | BSH2590 | 90 |
| BSH75163 | 41 | BSH10163 | 41 | BSH1565 | 65 | BSH2595 | 95 |
| BSH7546 | 46 | BSH1046 | 46 | BSH1570 | 70 | BSH25100 | 100 |
| BSH7550 | 50 | BSH1050 | 50 | BSH1575 | 75 | BSH25105 | 105 |
| - | - | BSH1055 | 55 | BSH1580 | 80 | BSH25110 | 110 |
| - | - | BSH1060 | 60 | BSH1585 | 85 | BSH25115 | 115 |
| - | - | BSH1065 | 65 | BSH1590 | 90 | BSH25120 | 120 |
| - | - | BSH1070 | 70 | BSH1595 | 95 | BSH25125 | 125 |
| - | - | BSH1075 | 75 | BSH15100 | 100 | BSH25135 | 135 |
| - | - | BSH1080 | 80 | BSH15105 | 105 | BSH25140 | 140 |
| - | - | BSH1085 | 85 | BSH15110 | 110 | BSH25145 | 145 |
| - | - | BSH1090 | 90 | BSH15115 | 115 | BSH25150 | 150 |
| - | - | BSH1095 | 95 | - | - | BSH25155 | 155 |
| - | - | BSH10100 | 100 | - | - | - | - |

BSH Series



Hexagon Size:


19 - 155 mm | ¾" - 6 1/8"



Select the Right Torque

Choose your Enerpac Torque Wrench using the untightening rule of thumb: Loosening torque equals about 250% of tightening torque.

Page: 276



Hexagon Bolt and Nut Sizes

See the table of hexagon sizes of bolts, nuts and related thread diameters.

Page: 275

IMPERIAL SOCKETS

| ¾" Square Drive | | 1" Square Drive | | | | 1½" Square Drive | | | | 2½" Square Drive | | | |
|-----------------|------------|-----------------|------------|--------------|------------|------------------|------------|--------------|------------|------------------|------------|--------------|------------|
| Model Number | A/F (inch) | Model Number | A/F (inch) | Model Number | A/F (inch) | Model Number | A/F (inch) | Model Number | A/F (inch) | Model Number | A/F (inch) | Model Number | A/F (inch) |
| BSH7519 | ¾" | BSH1019 | ¾" | BSH10231 | 2 5/16" | BSH15144 | 1 7/16" | BSH15281 | 2 13/16" | BSH25244 | 2 7/16" | BSH25419 | 4 3/16" |
| BSH75088 | 7/8" | BSH10088 | 7/8" | BSH10238 | 2 3/8" | BSH1538 | 1 1/2" | BSH15288 | 2 7/8" | BSH25250 | 2 1/2" | BSH25425 | 4 1/4" |
| BSH75094 | 15/16" | BSH10094 | 15/16" | BSH10244 | 2 7/16" | BSH15156 | 1 9/16" | BSH1575 | 2 15/16" | BSH2565 | 2 13/16" | BSH25110 | 4 5/16" |
| BSH7527 | 1 1/16" | BSH1027 | 1 1/16" | BSH10250 | 2 1/2" | BSH15163 | 1 5/8" | BSH15300 | 3" | BSH25263 | 2 5/8" | BSH25438 | 4 3/8" |
| BSH7530 | 1 3/16" | BSH1030 | 1 3/16" | BSH1065 | 2 9/16" | BSH1543 | 1 11/16" | BSH15306 | 3 1/16" | BSH25269 | 2 11/16" | BSH25450 | 4 1/2" |
| BSH75125 | 1 ¼" | BSH10125 | 1 ¼" | BSH10263 | 2 5/8" | BSH15175 | 1 ¾" | BSH15313 | 3 1/8" | BSH2570 | 2 ¾" | BSH25463 | 4 5/8" |
| BSH75131 | 1 5/16" | BSH10131 | 1 5/16" | BSH10269 | 2 11/16" | BSH1546 | 1 13/16" | BSH15319 | 3 3/16" | BSH25281 | 2 11/16" | BSH25475 | 4 ¾" |
| BSH7535 | 1 3/8" | BSH1035 | 1 3/8" | BSH1070 | 2 ¾" | BSH15188 | 1 7/8" | BSH15325 | 3 ¼" | BSH25288 | 2 7/8" | BSH25488 | 4 7/8" |
| BSH75144 | 1 7/16" | BSH10144 | 1 7/16" | BSH10281 | 2 13/16" | BSH15194 | 1 15/16" | BSH15338 | 3 3/8" | BSH2575 | 2 15/16" | BSH25500 | 5" |
| BSH7538 | 1 1/2" | BSH1038 | 1 1/2" | BSH10288 | 2 7/8" | BSH15200 | 2" | BSH15350 | 3 1/2" | BSH25300 | 3" | BSH25513 | 5 1/8" |
| BSH75156 | 1 9/16" | BSH10156 | 1 9/16" | BSH1075 | 2 15/16" | BSH15206 | 2 1/16" | BSH15363 | 3 5/8" | BSH25306 | 3 1/16" | BSH25519 | 5 3/16" |
| BSH75163 | 1 5/8" | BSH10163 | 1 5/8" | BSH10300 | 3" | BSH15213 | 2 1/8" | BSH1595 | 3 ¾" | BSH25313 | 3 1/8" | BSH25525 | 5 1/4" |
| BSH7543 | 1 11/16" | BSH1043 | 1 11/16" | BSH10306 | 3 1/16" | BSH15219 | 2 3/16" | BSH15388 | 3 7/8" | BSH25319 | 3 3/16" | BSH25538 | 5 3/8" |
| BSH75175 | 1 ¾" | BSH10175 | 1 ¾" | BSH10313 | 3 1/8" | BSH15225 | 2 ¼" | BSH15100 | 3 15/16" | BSH25325 | 3 ¼" | BSH25140 | 5 1/2" |
| BSH7546 | 1 13/16" | BSH1046 | 1 13/16" | BSH10319 | 3 3/16" | BSH15231 | 2 5/16" | BSH15400 | 4" | BSH25338 | 3 3/8" | BSH25575 | 5 ¾" |
| BSH75188 | 1 7/8" | BSH10188 | 1 7/8" | BSH10325 | 3 ¼" | BSH15238 | 2 3/8" | BSH15105 | 4 1/8" | BSH25350 | 3 1/2" | BSH25150 | 5 7/8" |
| BSH75194 | 1 15/16" | BSH10194 | 1 15/16" | BSH10338 | 3 3/8" | BSH15244 | 2 7/16" | BSH15419 | 4 3/16" | BSH25363 | 3 5/8" | BSH25600 | 6" |
| BSH75200 | 2" | BSH10200 | 2" | BSH10350 | 3 1/2" | BSH15250 | 2 1/2" | BSH15425 | 4 ¼" | BSH2595 | 3 ¾" | BSH25613 | 6 1/8" |
| - | - | BSH10206 | 2 1/16" | BSH10363 | 3 5/8" | BSH1565 | 2 9/16" | BSH15110 | 4 5/16" | BSH25388 | 3 7/8" | - | - |
| - | - | BSH10213 | 2 1/8" | BSH1095 | 3 ¾" | BSH15263 | 2 5/8" | BSH15438 | 4 3/8" | BSH25100 | 3 15/16" | - | - |
| - | - | BSH10219 | 2 3/16" | BSH10388 | 3 7/8" | BSH15269 | 2 11/16" | BSH15450 | 4 1/2" | BSH25400 | 4" | - | - |
| - | - | BSH10225 | 2 ¼" | - | - | BSH1570 | 2 ¾" | BSH15463 | 4 5/8" | BSH25105 | 4 1/8" | - | - |

Enerpac professional series steel torque wrenches provide reliable controlled tightening solutions across the industry.

S3000X Square Drive Torque Wrench on wind tower erection and maintenance

S3000X used to connect wind tower segments during assembly and maintenance. A robust but compact solution is required for tightening of bolts on wind tower sections. Large numbers of fasteners require precise application of torque to ensure joint integrity is achieved and maintained. The Enerpac S-Series wrench was selected as it offers simple and reliable operation while providing accurate and repeatable results.



W4000X Low Profile Torque Wrench on an API Pipe Flange

Throughout the Oil and Gas, Petrochemical and Processing Industries, pipeline joints, valves, pumps and machinery present challenges for controlled bolting. The restricted access on this flange was easily overcome with an Enerpac W-Series Torque Wrench. These wrenches offer reliability and control, ensuring even and consistent torque is applied to all bolts.

S3000X on an oil and gas flange

During maintenance quick turnaround times are essential; S-Series wrenches are chosen as they provide a large angle of nut rotation per stroke, offering speed and accuracy in a compact ergonomic tool.



▼ Shown: W4206X hexagon cassette with W4000PX drive unit



Safety and Performance

- Superior strength to size ratio provides easy access to difficult to reach applications without sacrificing endurance
- 30° rotation angle and rapid return stroke provide fast operation
- Tough manifold design with added safety feature for enhanced operator safety

Simplicity

- Fast release drive unit enables rapid exchange of cassettes, no tools required
- Quick and easy disassembly for maintenance without special tools
- Include robust handle which mounts on both sides and the tops of cassettes to allow for extra maneuverability

Versatility

- Available with optional enhanced tilt and swivel TSP300 manifold for horizontal and vertical maneuverability, with greater durability ¹⁾
- X-Edition drive units, cassettes and most accessories are compatible with standard edition tools ¹⁾
- Drive unit compatible with UltraSlim and WCR-Series cassettes

Accuracy

- Constant torque output provides accuracy of $\pm 3\%$ across full stroke.

Setting New Standards in Safety, Simplicity and Performance



Two Handle Styles

Robust angled positioning handle comes standard with every W-Series (X-Edition) cassette.

Straight positioning handles designed for extreme limited access applications are available as accessories.

| Compatible with W-Series (X-Edition) Cassettes | Model Nr. Angled positioning handles (standard) | Model Nr. Straight positioning handles (optional) |
|------------------------------------------------|-------------------------------------------------|---------------------------------------------------|
| W2000X, W4000X | SWH6A | SWH6S |
| W8000X, W15000X | SWH10A | SWH10S |
| W22000X, W35000X | SWH10EA ²⁾ | |

²⁾ SWH10EA is an eyebolt handle.



TSP - Pro Series Swivel

The optional TSP300 tilt and swivel manifold with robust interlocking design provides 360° X-axis rotation and 160° Y-axis rotation.

How to Order ¹⁾

Factory fitted to W-Series (X-Edition) drive units: Insert a "P" prior to the "X" in the tool model number, example: **W2000PX**.

Order as an accessory using the model number: **TSP300**, which can be fitted to existing W-Series (X-Edition) drive units. Includes male and female couplers.

Page: 205




ATEX declared. Calibration certificate included.

All X-edition tools are CE - ATEX declared and are shipped complete with a calibration certificate.



¹⁾ TSP300 is designed for X-Edition tools only, and is not compatible with previous edition tools. For replacement components for existing tools, refer to repair sheet on www.enerpac.com

Double-Acting Hydraulic Hexagon Torque Wrenches, X-Edition

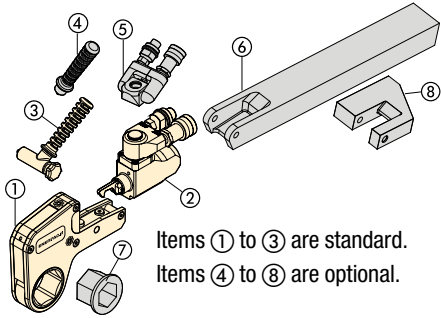

- ① Hexagon Cassette (pages 194-201)
- ② Drive Unit (page 193)
- ③ Angled Positioning Handle (page 192)
- ④ Straight Positioning Handle (page 192)
- ⑤ Pro Series Swivel (page 205)
- ⑥ Extended Reaction Arm (page 205)
- ⑦ Reducer Insert (pages 194-201)
- ⑧ Reaction Paddle (page 205)

Items ① to ③ are standard.
Items ④ to ⑧ are optional.

W Series X-Edition



Nominal Torque at 690 bar:

47.454 Nm

Hexagon Range:


30 - 155 mm / 1 1/16 - 6 1/8"

Nose Radius:

31 - 115 mm

Maximum Operating Pressure:


690 bar

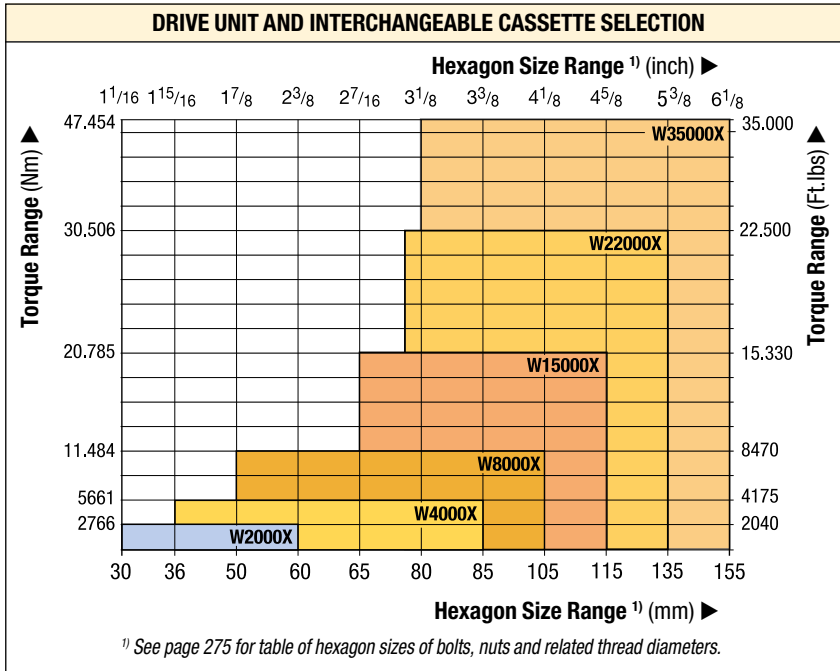

Torque Wrench Pump Selection Matrix

For optimum speed and performance see the torque wrench and pump matrix.

Page: **212**

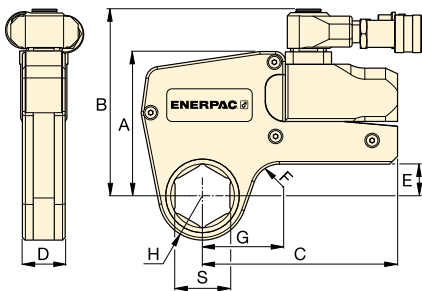

These rigid steel wrenches with low profile interchangeable hexagon cassettes guarantee durability and maximum versatility in bolting applications. ▶



▼ SELECTION CHART


| Hexagon Range * | | Nominal Torque at 690 bar | | Drive Unit Model Number ** | Minimum Torque | | Dimensions (mm) (see pages 194-201 for dimensions G, H and S) | | | | | | Weight (drive unit without hexagon cassette) (kg) |
|-----------------|-----------------|---------------------------|----------|----------------------------|----------------|----------|---------------------------------------------------------------|-----|-----|----|-------|----|---------------------------------------------------|
| (mm) | (inch) | (Nm) | (Ft.lbs) | | (Nm) | (Ft.lbs) | A | B | C | D | E | F | |
| 30 - 60 | 1 1/16 - 2 3/8 | 2766 | 2040 | W2000X | 276 | 204 | 109 | 141 | 148 | 32 | 24 | 20 | 1,4 |
| 36 - 85 | 1 5/16 - 3 3/8 | 5661 | 4175 | W4000X | 566 | 417 | 136 | 167 | 178 | 41 | 33 | 20 | 2,0 |
| 50 - 105 | 1 7/8 - 4 1/8 | 11.484 | 8470 | W8000X | 1148 | 847 | 172 | 205 | 208 | 53 | 42 | 25 | 3,0 |
| 65 - 115 | 2 7/16 - 4 5/8 | 20.785 | 15.330 | W15000X | 2078 | 1533 | 207 | 240 | 253 | 63 | 50 | 20 | 5,0 |
| 75 - 135 | 2 15/16 - 5 3/8 | 30.506 | 22.500 | W22000X | 3050 | 2250 | 227 | 266 | 297 | 77 | 48 | 35 | 7,7 |
| 80 - 155 | 3 1/8 - 6 1/8 | 47.454 | 35.000 | W35000X | 4745 | 3500 | 268 | 301 | 345 | 91 | 69-73 | 50 | 11,4 |

* With in-line reaction foot.

** To order a W-series wrench fitted with the TSP swivel, suffix the model number with "-P". Example: **W2000PX**.

www.enerpac.com

W2000X, Inch-Cassettes & Reducer Inserts

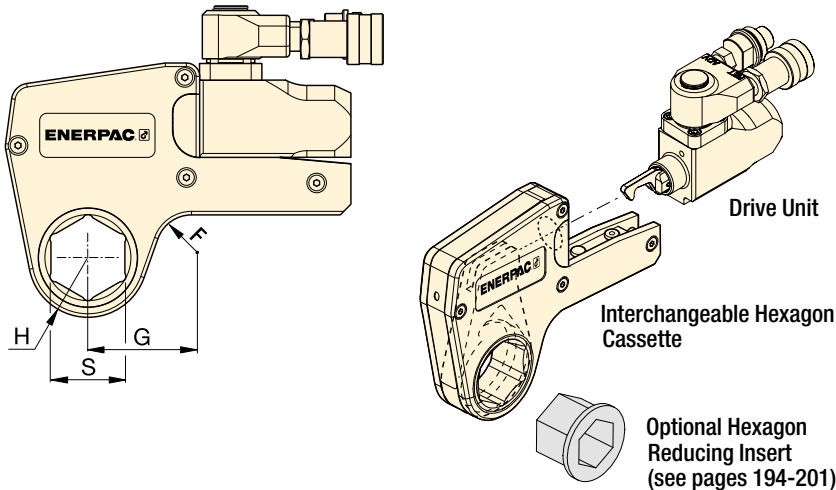

W Series X-Edition



Nominal Torque at 690 bar:

2766 Nm

Hexagon Range:

1¹/₁₆ - 2³/₈ inch

Maximum Operating Pressure:

690 bar



Metric Sizes

For metric sizes of hexagon cassettes and reducer inserts see:

Page: **200**



Hexagon Bolt and Nut Sizes

See the table for hexagon sizes of bolts, nuts and related thread diameters.


Page: **275**

▼ SELECTION CHART

| Drive Unit Model Number | Hexagon Size ¹⁾ | Nose Radius | Dim. | Model Number | Weight (kg) | Hexagon Reducer | | Hexagon Reducer | | Hexagon Reducer | |
|--------------------------------|---------------------------------|-------------|---------------|---------------|-----------------------------------|------------------------------------------------------------------|---------------------------------------------------------------|-----------------------------------------------------------------|-----------------------------------------------------------------|-----------------------------------------------------------------|------------------|
| | | | | | | Hexagon Reducer (inch) | Model Number | Hexagon Reducer (inch) | Model Number | Hexagon Reducer (inch) | Model Number |
| W2000X | 1 ¹ / ₁₆ | 31,0 | 53,7 | W2101X | 2,1 | - | - | - | - | - | - |
| | 1 ¹ / ₈ | 31,0 | 53,7 | W2102X | 2,1 | - | - | - | - | - | - |
| | 1 ³ / ₁₆ | 31,0 | 53,7 | W2103X | 2,1 | - | - | - | - | - | - |
| | 1 ¹ / ₄ | 31,0 | 53,7 | W2104X | 2,1 | - | - | - | - | - | - |
| | 1 ⁵ / ₁₆ | 31,0 | 53,7 | W2105X | 2,1 | - | - | - | - | - | - |
| | 1 ³ / ₈ | 31,0 | 53,7 | W2106X | 2,1 | - | - | - | - | - | - |
| | 1 ⁷ / ₁₆ | 31,0 | 53,7 | W2107X | 2,1 | 1 ⁷ / ₁₆ - 1 ¹ / ₈ | W2107R102 | - | - | - | - |
| | 1 ¹ / ₂ | 33,5 | 58,2 | W2108X | 2,2 | - | - | - | - | - | - |
| | 1 ⁹ / ₁₆ | 33,5 | 58,2 | W2109X | 2,2 | - | - | - | - | - | - |
| | 1 ⁵ / ₈ | 33,5 | 58,2 | W2110X | 2,2 | 1 ⁵ / ₈ - 1 ¹ / ₄ | W2110R104 | 1 ⁵ / ₈ - 1 ³ / ₁₆ | W2110R103 | - | - |
| | 1 ¹¹ / ₁₆ | 36,5 | 60,5 | W2111X | 2,2 | - | - | - | - | - | - |
| | 1 ³ / ₄ | 36,5 | 60,5 | W2112X | 2,2 | - | - | - | - | - | - |
| | 1 ¹³ / ₁₆ | 36,5 | 60,5 | W2113X | 2,2 | 1 ¹³ / ₁₆ - 1 ⁷ / ₁₆ | W2113R107 | 1 ¹³ / ₁₆ - 1 ¹ / ₄ | W2113R104 | - | - |
| | 1 ⁷ / ₈ | 39,0 | 63,1 | W2114X | 2,2 | - | - | - | - | - | - |
| | 1 ⁵ / ₈ | 39,0 | 63,1 | W2115X | 2,2 | - | - | - | - | - | - |
| | 2 | 39,0 | 63,1 | W2200X | 2,2 | 2 - 1 ⁵ / ₈ | W2200R110 | 2 - 1 ⁷ / ₁₆ | W2200R107 | - | - |
| | 2 ¹ / ₁₆ | 41,8 | 68,6 | W2201X | 2,3 | - | - | - | - | - | - |
| | 2 ¹ / ₈ | 41,8 | 68,6 | W2202X | 2,3 | - | - | - | - | - | - |
| | 2 ³ / ₁₆ | 41,8 | 68,6 | W2203X | 2,3 | 2 ³ / ₁₆ - 1 ¹³ / ₁₆ | W2203R113 | 2 ³ / ₁₆ - 1 ⁵ / ₈ | W2203R110 | 2 ³ / ₁₆ - 1 ⁷ / ₁₆ | W2203R107 |
| | 2 ¹ / ₄ | 44,5 | 64,8 | W2204X | 2,2 | - | - | - | - | - | - |
| 2 ⁵ / ₁₆ | 44,5 | 64,8 | W2205X | 2,2 | - | - | - | - | - | - | |
| 2 ³ / ₈ | 44,5 | 64,8 | W2206X | 2,2 | 2 ³ / ₈ - 2 | W2206R200 | 2 ³ / ₈ - 1 ⁷ / ₈ | W2206R114 | 2 ³ / ₈ - 1 ¹³ / ₁₆ | W2206R113 | |
| - | - | - | - | - | - | 2 ³ / ₈ - 1 ¹ / ₂ | W2206R108 | 2 ³ / ₈ - 1 ⁷ / ₁₆ | W2206R107 | 2 ³ / ₈ - 1 ⁵ / ₁₆ | W2206R110 |

¹⁾ See page 275 for table of hexagon sizes of bolts, nuts and related thread diameters.

W4000X-Series, Inch-Cassettes & Reducer Inserts

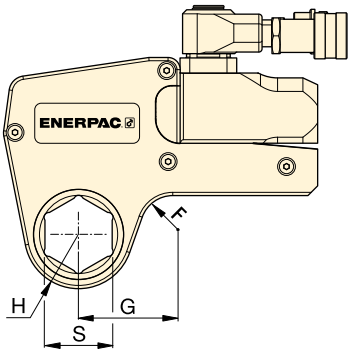

Nominal Torque at 690 bar:

5661 Nm

Hexagon Range:

1⁵/₁₆ - 3³/₈ inch

Maximum Operating Pressure:

690 bar


W
Series
X-Edition



| Drive Unit Model Number | Hexagon Size ¹⁾ | Nose Radius | Dim. | Model Number | Weight | Hexagon Reducer | | Hexagon Reducer | | Hexagon Reducer | |
|--------------------------------|---------------------------------|-------------|--------|--------------|--------|------------------------------------------------------------------|--------------|------------------------------------------------------------------|--------------|------------------------------------------------------------------|--------------|
| | | | | | | Hexagon Reducer (inch) | Model Number | Hexagon Reducer (inch) | Model Number | Hexagon Reducer (inch) | Model Number |
| W4000X | 1 ⁵ / ₁₆ | 37,0 | 61,0 | W4105X | 3,7 | - | - | - | - | - | - |
| | 1 ³ / ₈ | 37,0 | 61,0 | W4106X | 3,7 | - | - | - | - | - | - |
| | 1 ⁷ / ₁₆ | 37,0 | 61,0 | W4107X | 3,7 | - | - | - | - | - | - |
| | 1 ¹ / ₂ | 37,0 | 61,0 | W4108X | 3,7 | - | - | - | - | - | - |
| | 1 ⁹ / ₁₆ | 37,0 | 61,0 | W4109X | 3,7 | - | - | - | - | - | - |
| | 1 ⁵ / ₈ | 37,0 | 61,0 | W4110X | 3,7 | - | - | - | - | - | - |
| | 1 ¹¹ / ₁₆ | 39,5 | 64,0 | W4111X | 3,8 | - | - | - | - | - | - |
| | 1 ³ / ₄ | 39,5 | 64,0 | W4112X | 3,8 | - | - | - | - | - | - |
| | 1 ¹³ / ₁₆ | 39,5 | 64,0 | W4113X | 3,8 | - | - | - | - | - | - |
| | 1 ⁷ / ₈ | 41,5 | 66,7 | W4114X | 3,9 | - | - | - | - | - | - |
| | 1 ¹⁵ / ₁₆ | 41,5 | 66,7 | W4115X | 3,9 | - | - | - | - | - | - |
| | 2 | 41,5 | 66,7 | W4200X | 3,9 | 2 - 1 ⁷ / ₁₆ | W4200R107 | - | - | - | - |
| | 2 ¹ / ₁₆ | 44,0 | 73,4 | W4201X | 4,0 | - | - | - | - | - | - |
| | 2 ¹ / ₈ | 44,0 | 73,4 | W4202X | 4,0 | - | - | - | - | - | - |
| | 2 ³ / ₁₆ | 44,0 | 73,4 | W4203X | 4,0 | 2 ³ / ₁₆ - 1 ⁵ / ₈ | W4203R110 | 2 ³ / ₁₆ - 1 ⁷ / ₁₆ | W4203R107 | 2 ³ / ₁₆ - 1 ¹ / ₄ | W4203R104 |
| | 2 ¹ / ₄ | 46,5 | 70,6 | W4204X | 4,1 | - | - | - | - | - | - |
| | 2 ⁵ / ₁₆ | 46,5 | 70,6 | W4205X | 4,1 | - | - | - | - | - | - |
| | 2 ³ / ₈ | 46,5 | 70,6 | W4206X | 4,1 | 2 ³ / ₈ - 2 | W4206R200 | 2 ³ / ₈ - 1 ¹³ / ₁₆ | W4206R113 | 2 ³ / ₈ - 1 ⁷ / ₁₆ | W4206R107 |
| | - | - | - | - | - | 2 ³ / ₈ - 1 ³ / ₈ | W4206R106 | - | - | - | - |
| | 2 ⁷ / ₁₆ | 49,5 | 76,2 | W4207X | 4,1 | 2 ⁷ / ₁₆ - 2 | W4207R200 | - | - | - | - |
| | 2 ¹ / ₂ | 49,5 | 76,2 | W4208X | 4,1 | 2 ¹ / ₂ - 2 | W4208R200 | 2 ¹ / ₂ - 1 ⁷ / ₁₆ | W4208R113 | 2 ¹ / ₂ - 2 ¹ / ₁₆ | W4208R201 |
| | 2 ⁹ / ₁₆ | 49,5 | 76,2 | W4209X | 4,1 | 2 ⁹ / ₁₆ - 2 ³ / ₁₆ | W4209R203 | 2 ⁹ / ₁₆ - 2 ¹ / ₈ | W4209R202 | 2 ⁹ / ₁₆ - 2 ¹ / ₁₆ | W4209R201 |
| | - | - | - | - | - | 2 ⁹ / ₁₆ - 2 | W4209R200 | 2 ⁹ / ₁₆ - 1 ¹³ / ₁₆ | W4209R113 | - | - |
| | 2 ⁵ / ₈ | 52,5 | 78,3 | W4210X | 4,2 | - | - | - | - | - | - |
| | 2 ¹¹ / ₁₆ | 52,5 | 78,3 | W4211X | 4,2 | - | - | - | - | - | - |
| | 2 ³ / ₄ | 52,5 | 78,3 | W4212X | 4,2 | 2 ³ / ₄ - 2 ³ / ₈ | W4212R206 | 2 ³ / ₄ - 2 ³ / ₁₆ | W4212R203 | 2 ³ / ₄ - 2 ¹ / ₈ | W4212R202 |
| | 2 ¹³ / ₁₆ | 55,3 | 81,6 | W4213X | 4,3 | - | - | - | - | - | - |
| | 2 ⁷ / ₈ | 55,3 | 81,6 | W4214X | 4,3 | - | - | - | - | - | - |
| | 2 ¹⁵ / ₁₆ | 55,3 | 81,6 | W4215X | 4,3 | 2 ¹⁵ / ₁₆ - 2 ⁹ / ₁₆ | W4215R209 | 2 ¹⁵ / ₁₆ - 2 ³ / ₈ | W4215R206 | 2 ¹⁵ / ₁₆ - 2 ³ / ₁₆ | W4215R203 |
| | - | - | - | - | - | 2 ¹⁵ / ₁₆ - 2 | W4215R200 | - | - | - | - |
| | 3 | 58,5 | 83,5 | W4300X | 4,4 | 3 - 2 ⁹ / ₁₆ | W4300R203 | - | - | - | - |
| | 3 ¹ / ₁₆ | 58,5 | 83,5 | W4301X | 4,4 | - | - | - | - | - | - |
| | 3 ¹ / ₈ | 58,5 | 83,5 | W4302X | 4,4 | 3 ¹ / ₈ - 2 ³ / ₄ | W4302R212 | 3 ¹ / ₈ - 2 ⁹ / ₁₆ | W4302R209 | 3 ¹ / ₈ - 2 ³ / ₈ | W4302R206 |
| | - | - | - | - | - | 3 ¹ / ₈ - 2 ⁵ / ₁₆ | W4302R205 | 3 ¹ / ₈ - 2 ¹ / ₄ | W4302R204 | 3 ¹ / ₈ - 2 ³ / ₁₆ | W4302R203 |
| | - | - | - | - | - | 3 ¹ / ₈ - 2 ³ / ₁₆ | W4302R203 | 3 ¹ / ₈ - 2 ¹ / ₈ | W4302R202 | 3 ¹ / ₈ - 2 | W4302R200 |
| | 3 ³ / ₁₆ | 62,0 | 85,5 | W4303X | 4,5 | - | - | - | - | - | - |
| 3 ¹ / ₄ | 62,0 | 85,5 | W4304X | 4,5 | - | - | - | - | - | - | |
| 3 ⁵ / ₁₆ | 62,0 | 85,5 | W4305X | 4,5 | - | - | - | - | - | - | |
| 3 ³ / ₈ | 62,0 | 85,5 | W4306X | 4,5 | - | - | - | - | - | - | |

¹⁾ See page 275 for table of hexagon sizes of bolts, nuts and related thread diameters.

W8000X-Series, Inch-Cassettes & Reducers

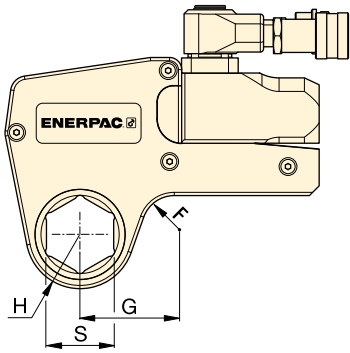

Nominal Torque at 690 bar:

11.484 Nm

Hexagon Range:

1 7/8 - 4 1/8 inch


Maximum Operating Pressure:

690 bar

W
Series
X-Edition




▼ SELECTION CHART

| Drive Unit Model Number | Hexagon Size ¹⁾ | Nose Radius | Dim. | Model Number | Weight (kg) | Hexagon Reducer | | Hexagon Reducer | | Hexagon Reducer | |
|-------------------------|----------------------------|-------------|----------------|-----------------------------------------------------------------------------------|---------------|------------------------|------------------|------------------------|------------------|------------------------|------------------|
| | | | | | | Hexagon Reducer (inch) | Model Number | Hexagon Reducer (inch) | Model Number | Hexagon Reducer (inch) | Model Number |
| W8000X | S (inch) | H (mm) | G (mm) |  | (kg) | Hexagon Reducer (inch) | Model Number | Hexagon Reducer (inch) | Model Number | Hexagon Reducer (inch) | Model Number |
| | 1 7/8 | 45,0 | 78,2 | W8114X | 8,1 | – | – | – | – | – | – |
| | 1 15/16 | 45,0 | 78,2 | W8115X | 8,1 | – | – | – | – | – | – |
| | 2 | 45,0 | 78,2 | W8200X | 8,1 | – | – | – | – | – | – |
| | 2 1/16 | 48,0 | 80,0 | W8201X | 8,1 | – | – | – | – | – | – |
| | 2 1/8 | 48,0 | 80,0 | W8202X | 8,1 | – | – | – | – | – | – |
| | 2 3/16 | 48,0 | 80,0 | W8203X | 8,1 | – | – | – | – | – | – |
| | 2 1/4 | 51,0 | 82,5 | W8204X | 8,1 | – | – | – | – | – | – |
| | 2 5/16 | 51,0 | 82,5 | W8205X | 8,1 | – | – | – | – | – | – |
| | 2 3/8 | 51,0 | 82,5 | W8206X | 8,1 | – | – | – | – | – | – |
| | 2 7/16 | 52,5 | 85,9 | W8207X | 8,1 | – | – | – | – | – | – |
| | 2 1/2 | 52,5 | 85,9 | W8208X | 8,1 | – | – | – | – | – | – |
| | 2 9/16 | 52,5 | 85,9 | W8209X | 8,1 | 2 9/16 - 2 | W8209R200 | – | – | – | – |
| | 2 5/8 | 56,0 | 84,8 | W8210X | 8,1 | – | – | – | – | – | – |
| | 2 11/16 | 56,0 | 84,8 | W8211X | 7,9 | – | – | – | – | – | – |
| | 2 3/4 | 56,0 | 84,8 | W8212X | 7,9 | 2 3/4 - 2 3/16 | W8212R203 | – | – | – | – |
| | 2 13/16 | 58,0 | 85,0 | W8213X | 7,9 | – | – | – | – | – | – |
| | 2 7/8 | 58,0 | 85,0 | W8214X | 7,9 | – | – | – | – | – | – |
| | 2 15/16 | 58,0 | 85,0 | W8215X | 7,9 | 2 15/16 - 2 3/8 | W8215R206 | 2 15/16 - 2 3/16 | W8215R203 | – | – |
| | 3 | 60,5 | 89,5 | W8300X | 8,0 | – | – | – | – | – | – |
| | 3 1/16 | 60,5 | 89,5 | W8301X | 8,0 | – | – | – | – | – | – |
| | 3 1/8 | 60,5 | 89,5 | W8302X | 8,0 | 3 1/8 - 2 9/16 | W8302R209 | 3 1/8 - 2 3/8 | W8302R206 | 3 1/8 - 2 3/16 | W8302R203 |
| | – | – | – | – | – | 3 1/8 - 2 | W8302R200 | – | – | – | – |
| | 3 3/16 | 66,0 | 92,2 | W8303X | 8,2 | – | – | – | – | – | – |
| | 3 1/4 | 66,0 | 92,2 | W8304X | 8,2 | – | – | – | – | – | – |
| | 3 5/16 | 66,0 | 92,2 | W8305X | 8,2 | – | – | – | – | – | – |
| | 3 3/8 | 66,0 | 92,2 | W8306X | 8,2 | – | – | – | – | – | – |
| | 3 7/16 | 66,0 | 92,2 | W8307IX | 8,2 | – | – | – | – | – | – |
| | 3 1/2 | 66,0 | 92,2 | W8308X | 8,2 | 3 1/2 - 3 | W8308R300 | 3 1/2 - 2 15/16 | W8308R215 | 3 1/2 - 2 3/4 | W8308R212 |
| | 3 9/16 | 74,0 | 102,9 | W8309X | 8,8 | – | – | – | – | – | – |
| | 3 5/8 | 74,0 | 102,9 | W8310X | 8,8 | – | – | – | – | – | – |
| | 3 11/16 | 74,0 | 102,9 | W8311X | 8,8 | – | – | – | – | – | – |
| 3 3/4 | 74,0 | 102,9 | W8312X | 8,8 | 3 3/4 - 3 1/8 | W8312R302 | 3 3/4 - 2 15/16 | W8312R215 | 3 3/4 - 2 3/4 | W8312R212 | |
| 3 13/16 | 74,0 | 102,9 | W8313X | 8,8 | – | – | – | – | – | – | |
| 3 7/8 | 74,0 | 102,9 | W8314X | 8,8 | 3 7/8 - 3 1/8 | W8314R302 | 3 7/8 - 2 15/16 | W8314R215 | – | – | |
| 3 15/16 | 79,5 | 110,0 | W8315X | 9,3 | – | – | – | – | – | – | |
| 4 | 79,5 | 110,0 | W8400X | 9,3 | – | – | – | – | – | – | |
| 4 1/16 | 79,5 | 110,0 | W8401IX | 9,3 | – | – | – | – | – | – | |
| 4 1/8 | 79,5 | 110,0 | W8402X | 9,3 | – | – | – | – | – | – | |

¹⁾ See page 275 for table of hexagon sizes of bolts, nuts and related thread diameters.

W15000X-Series, Inch-Cassettes & Reducer Inserts

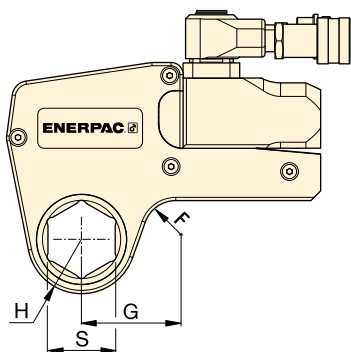

Nominal Torque at 690 bar:

20.785 Nm

Hexagon Range:

2¹/₈ - 4⁵/₈ inch

Maximum Operating Pressure:

690 bar

W
Series
X-Edition




▼ SELECTION CHART

| Drive Unit Model Number | Hexagon Size ¹⁾ | Nose Radius | Dim. | Model Number | Weight | Hexagon Reducer | | Hexagon Reducer | | Hexagon Reducer | |
|--------------------------------|---------------------------------|-------------|----------|--------------|-----------------------------------------------------------------|-----------------------------------------------------------------|---------------------------------------------------------------|-----------------------------------------------------------------|---------------------------------------------------------------|---------------------------------------------------------------|--------------|
| | | | | | | Hexagon Reducer (inch) | Model Number | Hexagon Reducer (inch) | Model Number | Hexagon Reducer (inch) | Model Number |
| W15000X | S (inch) | H (mm) | G (mm) | | (kg) | | | | | | |
| | 2 ⁷ / ₁₆ | 59,0 | 88,6 | W15207X | 13,6 | - | - | - | - | - | - |
| | 2 ¹ / ₂ | 59,0 | 88,6 | W15208X | 13,6 | - | - | - | - | - | - |
| | 2 ⁹ / ₁₆ | 59,0 | 88,6 | W15209X | 13,6 | - | - | - | - | - | - |
| | 2 ⁵ / ₈ | 59,0 | 88,6 | W15210X | 13,6 | - | - | - | - | - | - |
| | 2 ¹¹ / ₁₆ | 59,0 | 88,6 | W15211X | 13,6 | - | - | - | - | - | - |
| | 2 ³ / ₄ | 59,0 | 88,6 | W15212X | 13,6 | - | - | - | - | - | - |
| | 2 ¹³ / ₁₆ | 62,0 | 90,5 | W15213X | 13,7 | - | - | - | - | - | - |
| | 2 ⁷ / ₈ | 62,0 | 90,5 | W15214X | 13,7 | - | - | - | - | - | - |
| | 2 ¹⁵ / ₁₆ | 62,0 | 90,5 | W15215X | 13,7 | - | - | - | - | - | - |
| | 3 | 64,5 | 92,9 | W15300X | 13,8 | 3 - 2 ¹ / ₈ | W15300R202 | - | - | - | - |
| | 3 ¹ / ₁₆ | 64,5 | 92,9 | W15301X | 13,8 | - | - | - | - | - | - |
| | 3 ¹ / ₈ | 64,5 | 92,9 | W15302X | 13,8 | 3 ¹ / ₈ - 2 ⁹ / ₁₆ | W15302R209 | - | - | - | - |
| | 3 ³ / ₁₆ | 69,5 | 96,6 | W15303X | 14,1 | - | - | - | - | - | - |
| | 3 ¹ / ₄ | 69,5 | 96,6 | W15304X | 14,1 | - | - | - | - | - | - |
| | 3 ⁵ / ₁₆ | 69,5 | 96,6 | W15305X | 14,1 | - | - | - | - | - | - |
| | 3 ³ / ₈ | 69,5 | 96,6 | W15306X | 14,1 | - | - | - | - | - | - |
| | 3 ⁷ / ₁₆ | 69,5 | 96,6 | W15307IX | 14,1 | - | - | - | - | - | - |
| | 3 ¹ / ₂ | 69,5 | 96,6 | W15308X | 14,1 | 3 ¹ / ₂ - 2 ¹⁵ / ₁₆ | W15308R215 | 3 ¹ / ₂ - 2 ³ / ₄ | W15308R212 | - | - |
| | 3 ⁹ / ₁₆ | 75,0 | 101,8 | W15309X | 14,6 | - | - | - | - | - | - |
| | 3 ⁵ / ₈ | 75,0 | 101,8 | W15310X | 14,6 | - | - | - | - | - | - |
| | 3 ¹¹ / ₁₆ | 75,0 | 101,8 | W15311X | 14,6 | - | - | - | - | - | - |
| | 3 ³ / ₄ | 75,0 | 101,8 | W15312X | 14,6 | 3 ³ / ₄ - 3 ¹ / ₈ | W15312R302 | 3 ³ / ₄ - 2 ¹⁵ / ₁₆ | W15312R215 | - | - |
| | 3 ¹³ / ₁₆ | 75,0 | 101,8 | W15313X | 14,5 | - | - | - | - | - | - |
| | 3 ⁷ / ₈ | 75,0 | 101,8 | W15314X | 14,5 | 3 ⁷ / ₈ - 3 ¹ / ₈ | W15314R302 | 3 ⁷ / ₈ - 2 ¹⁵ / ₁₆ | W15314R215 | - | - |
| | 3 ¹⁵ / ₁₆ | 80,5 | 103,1 | W15315X | 14,8 | - | - | - | - | - | - |
| | 4 | 80,5 | 103,1 | W15400X | 14,8 | - | - | - | - | - | - |
| | 4 ¹ / ₁₆ | 80,5 | 103,1 | W15401IX | 14,8 | - | - | - | - | - | - |
| | 4 ¹ / ₈ | 80,5 | 103,1 | W15402X | 14,8 | 4 ¹ / ₈ - 3 ¹ / ₂ | W15402R308 | 4 ¹ / ₈ - 3 ⁵ / ₁₆ | W15402R305 | 4 ¹ / ₈ - 3 ¹ / ₄ | W15402R304 |
| | 4 ³ / ₁₆ | 80,5 | 103,1 | W15403IX | 14,8 | - | - | - | - | - | - |
| | 4 ¹ / ₄ | 80,5 | 103,1 | W15404X | 14,8 | 4 ¹ / ₄ - 3 ¹ / ₂ | W15404R308 | 4 ¹ / ₄ - 3 ¹ / ₈ | W15404R302 | - | - |
| | 4 ⁵ / ₁₆ | 87,5 | 114,8 | W15405X | 15,1 | - | - | - | - | - | - |
| 4 ³ / ₈ | 87,5 | 114,8 | W15406X | 15,1 | - | - | - | - | - | - | |
| 4 ⁷ / ₁₆ | 87,5 | 114,8 | W15407X | 15,1 | - | - | - | - | - | - | |
| 4 ¹ / ₂ | 87,5 | 114,8 | W15408IX | 15,1 | - | - | - | - | - | - | |
| 4 ⁹ / ₁₆ | 87,5 | 114,8 | W15409IX | 15,1 | - | - | - | - | - | - | |
| 4 ⁵ / ₈ | 87,5 | 114,8 | W15410IX | 15,1 | 4 ⁵ / ₈ - 3 ¹⁵ / ₁₆ | W15410R315 | 4 ⁵ / ₈ - 3 ⁷ / ₈ | W15410R314 | 4 ⁵ / ₈ - 3 ³ / ₄ | W15410R312 | |
| - | - | - | - | - | - | 4 ⁵ / ₈ - 3 ¹ / ₂ | W15410R308 | - | - | - | |
| - | - | - | - | - | - | - | - | - | - | - | |

¹⁾ See page 275 for table of hexagon sizes of bolts, nuts and related thread diameters.

W22000X, Inch-Cassettes & Reducers

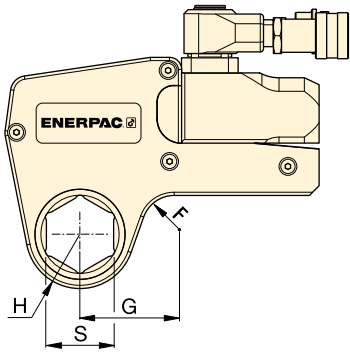

Nominal Torque at 690 bar:

30.506 Nm

Hexagon Range:

2¹⁵/₁₆ - 5³/₈ inch

Maximum Operating Pressure:

690 bar

W
Series
X-Edition




▼ SELECTION CHART

| Drive Unit Model Number | Hexagon Size ¹⁾ S (inch) | Nose Radius H (mm) | G (mm) | Model Nr. Cassette | Weight (kg) | Hexagon Reducer | | Hexagon Reducer | | Hexagon Reducer | |
|--------------------------------|-------------------------------------|--------------------|---------|--------------------|---------------------------------------------------------------|-----------------------------------------------------------------|---------------------------------------------------------------|-----------------------------------------------------------------|---------------------------------------------------------------|-----------------------------------------------------------------|----------------------|
| | | | | | | Hexagon Reducer (inch) | Model Number Reducer | Hexagon Reducer (inch) | Model Number Reducer | Hexagon Reducer (inch) | Model Number Reducer |
| W22000X | 2 ¹⁵ / ₁₆ | 67,0 | 102,1 | W22215X | 22,1 | - | - | - | - | - | - |
| | 3 | 67,0 | 102,1 | W22300X | 22,0 | - | - | - | - | - | - |
| | 3 ¹ / ₁₆ | 67,0 | 102,1 | W22301X | 21,9 | - | - | - | - | - | - |
| | 3 ¹ / ₈ | 67,0 | 102,1 | W22302X | 21,6 | 3 ¹ / ₈ - 2 ³ / ₈ | W22302R206 | 3 ¹ / ₈ - 2 ³ / ₁₆ | W22302R203 | - | - |
| | 3 ³ / ₁₆ | 72,4 | 107,4 | W22303X | 22,9 | - | - | - | - | - | - |
| | 3 ¹ / ₄ | 72,4 | 107,4 | W22304X | 22,8 | - | - | - | - | - | - |
| | 3 ⁵ / ₁₆ | 72,4 | 107,4 | W22305X | 22,6 | - | - | - | - | - | - |
| | 3 ³ / ₈ | 72,4 | 107,4 | W22306X | 22,5 | - | - | - | - | - | - |
| | 3 ⁷ / ₁₆ | 72,4 | 107,4 | W22307IX | 22,8 | - | - | - | - | - | - |
| | 3 ¹ / ₂ | 72,4 | 107,4 | W22308X | 22,2 | 3 ¹ / ₂ - 2 ³ / ₄ | W22308R212 | 3 ¹ / ₂ - 2 ⁹ / ₁₆ | W22308R209 | 3 ¹ / ₂ - 2 ³ / ₈ | W22308R206 |
| | 3 ⁹ / ₁₆ | 77,9 | 113,0 | W22309X | 23,4 | - | - | - | - | - | - |
| | 3 ⁵ / ₈ | 77,9 | 113,0 | W22310X | 23,3 | - | - | - | - | - | - |
| | 3 ¹¹ / ₁₆ | 77,9 | 113,0 | W22311X | 23,1 | - | - | - | - | - | - |
| | 3 ³ / ₄ | 77,9 | 113,0 | W22312X | 22,9 | 3 ³ / ₄ - 2 ¹⁵ / ₁₆ | W22312R215 | - | - | - | - |
| | 3 ¹³ / ₁₆ | 77,9 | 113,0 | W22313X | 22,8 | - | - | - | - | - | - |
| | 3 ⁷ / ₈ | 77,9 | 113,0 | W22314X | 22,6 | 3 ⁷ / ₈ - 3 ¹ / ₈ | W22314R302 | 3 ⁷ / ₈ - 2 ¹⁵ / ₁₆ | W22314R215 | 3 ⁷ / ₈ - 2 ³ / ₄ | W22314R212 |
| | 3 ¹⁵ / ₁₆ | 85,1 | 119,9 | W22315X | 24,3 | - | - | - | - | - | - |
| | 4 | 85,1 | 119,9 | W22400X | 24,1 | - | - | - | - | - | - |
| | 4 ¹ / ₁₆ | 85,1 | 119,9 | W22401IX | 24,0 | - | - | - | - | - | - |
| | 4 ¹ / ₈ | 85,1 | 119,9 | W22402X | 23,6 | - | - | - | - | - | - |
| | 4 ³ / ₁₆ | 85,1 | 119,9 | W22403IX | 23,6 | - | - | - | - | - | - |
| | 4 ¹ / ₄ | 85,1 | 119,9 | W22404X | 24,6 | 4 ¹ / ₄ - 3 ¹ / ₂ | W22404R308 | 4 ¹ / ₄ - 3 ¹ / ₈ | W22404R302 | 4 ¹ / ₄ - 2 ¹⁵ / ₁₆ | W22404R215 |
| | 4 ⁵ / ₁₆ | 89,9 | 125,0 | W22405X | 24,6 | - | - | - | - | - | - |
| | 4 ³ / ₈ | 89,9 | 125,0 | W22406X | 24,5 | - | - | - | - | - | - |
| | 4 ⁷ / ₁₆ | 89,9 | 125,0 | W22407X | 24,3 | - | - | - | - | - | - |
| | 4 ¹ / ₂ | 89,9 | 125,0 | W22408IX | 24,1 | - | - | - | - | - | - |
| | 4 ⁹ / ₁₆ | 89,9 | 125,0 | W22409IX | 23,9 | - | - | - | - | - | - |
| | 4 ⁵ / ₈ | 89,9 | 125,0 | W22410IX | 23,6 | 4 ⁵ / ₈ - 3 ⁷ / ₈ | W22410R314 | 4 ⁵ / ₈ - 3 ³ / ₄ | W22410R312 | 4 ⁵ / ₈ - 3 ¹ / ₂ | W22410R308 |
| | 4 ³ / ₄ | 95,0 | 130,0 | W22412X | 24,7 | - | - | - | - | - | - |
| | 4 ⁷ / ₈ | 95,0 | 130,0 | W22414X | 24,3 | - | - | - | - | - | - |
| | 5 | 95,0 | 130,0 | W22500X | 23,8 | 5 - 4 ¹ / ₄ | W22500R404 | 5 - 4 ¹ / ₈ | W22500R402 | 5 - 3 ⁷ / ₈ | W22500R314 |
| | 5 ¹ / ₈ | 100,0 | 134,8 | W22502X | 25,0 | - | - | - | - | - | - |
| 5 ³ / ₁₆ | 100,0 | 134,8 | W22503X | 24,8 | - | - | - | - | - | - | |
| 5 ¹ / ₄ | 100,0 | 134,8 | W22504X | 24,5 | - | - | - | - | - | - | |
| 5 ³ / ₈ | 100,0 | 134,8 | W22506X | 23,9 | 5 ³ / ₈ - 4 ⁵ / ₈ | W22506R410 | 5 ³ / ₈ - 4 ¹ / ₄ | W22506R404 | 5 ³ / ₈ - 4 ¹ / ₈ | W22506R402 | |
| - | - | - | W22506X | 23,9 | 5 ³ / ₈ - 3 ⁷ / ₈ | W22506R314 | - | - | - | - | |

¹⁾ See page 275 for table of hexagon sizes of bolts, nuts and related thread diameters.

W35000X, Inch-Cassettes & Reducer Inserts



▼ SELECTION CHART

| Drive Unit Model Number | Hexagon Size S | Nose Radius H | G | Model Nr. Cassette | Weight (kg) | Reducer | |
|-------------------------|----------------|---------------|---------|--------------------|---------------|------------------------|----------------------|
| | | | | | | Hexagon Reducer (inch) | Model Number Reducer |
| W35000X | 3 1/8 | 76,0 | 126,8 | W35302X | 32,8 | 3 1/8 - 2 | W35302R200 |
| | 3 3/16 | 76,0 | 126,8 | W35303X | 32,7 | - | - |
| | 3 1/4 | 76,0 | 126,8 | W35304X | 32,5 | - | - |
| | 3 5/16 | 76,0 | 126,8 | W35305X | 32,4 | - | - |
| | 3 3/8 | 76,0 | 126,8 | W35306X | 32,2 | - | - |
| | 3 7/16 | 76,0 | 126,8 | W35307X | 32,0 | - | - |
| | 3 1/2 | 76,0 | 126,8 | W35308X | 31,8 | 3 1/2 - 2 5/16 | W35308R205 |
| | 3 9/16 | 81,5 | 132,5 | W35309X | 32,4 | - | - |
| | 3 5/8 | 81,5 | 132,5 | W35310X | 33,3 | - | - |
| | 3 11/16 | 81,5 | 132,5 | W35311X | 33,1 | - | - |
| | 3 3/4 | 81,5 | 132,5 | W35312X | 32,9 | - | - |
| | 3 13/16 | 81,5 | 132,5 | W35313X | 32,7 | - | - |
| | 3 7/8 | 81,5 | 132,5 | W35314X | 32,4 | 3 7/8 - 2 11/16 | W35314R211 |
| | 3 15/16 | 87,0 | 137,0 | W35315X | 34,1 | 3 15/16 - 2 13/16 | W35315R213 |
| | 4 | 87,0 | 137,0 | W35400X | 33,9 | - | - |
| | 4 1/16 | 87,0 | 137,0 | W35401IX | 33,7 | - | - |
| | 4 1/8 | 87,0 | 137,0 | W35402X | 33,5 | - | - |
| | 4 3/16 | 87,0 | 137,0 | W35403IX | 33,3 | - | - |
| | 4 1/4 | 87,0 | 137,0 | W35404X | 33,0 | 4 1/4 - 3 1/16 | W35404R301 |
| | 4 5/16 | 93,0 | 143,0 | W35405X | 34,9 | - | - |
| | 4 3/8 | 93,0 | 143,0 | W35406X | 34,7 | - | - |
| | 4 7/16 | 93,0 | 143,0 | W35407X | 34,5 | - | - |
| | 4 1/2 | 93,0 | 143,0 | W35408X | 34,3 | - | - |
| | 4 9/16 | 93,0 | 143,0 | W35409X | 34,1 | - | - |
| | 4 5/8 | 93,0 | 143,0 | W35410IX | 33,7 | 4 5/8 - 3 5/8 | W35410R310 |
| | 4 3/4 | 98,5 | 148,5 | W35412X | 35,6 | 4 3/4 - 3 3/4 | W35412R312 |
| | 4 7/8 | 98,5 | 148,5 | W35414X | 34,9 | - | - |
| | 5 | 98,5 | 148,5 | W35500X | 34,3 | 5 - 4 | W35500R400 |
| | 5 1/8 | 103,0 | 153,0 | W35502X | 35,8 | 5 1/8 - 4 1/8 | W35502R402 |
| | 5 3/16 | 103,0 | 153,0 | W35503IX | 35,6 | - | - |
| | 5 1/4 | 103,0 | 153,0 | W35504X | 35,2 | - | - |
| | 5 3/8 | 103,0 | 153,0 | W35506X | 34,6 | 5 3/8 - 4 5/16 | W35506R405 |
| 5 1/2 | 108,5 | 158,5 | W35508X | 36,2 | - | - | |
| 5 9/16 | 108,5 | 158,5 | W35509X | 36,0 | - | - | |
| 5 5/8 | 108,5 | 158,5 | W35510X | 35,6 | - | - | |
| 5 3/4 | 108,5 | 164,0 | W35512X | 34,9 | 5 3/4 - 4 3/4 | W35512R412 | |
| 5 7/8 | 114,0 | 164,0 | W35514X | 36,7 | 5 7/8 - 4 7/8 | W35514R414 | |
| 6 | 114,0 | 164,0 | W35600X | 36,1 | - | - | |
| 6 1/8 | 114,0 | 164,0 | W35602X | 35,3 | 6 1/8 - 5 1/8 | W35602R502 | |

W Series X-Edition



Nominal Torque at 690 bar:

47.454 Nm

Hexagon Range:

3 1/8 - 6 1/8 inch

Maximum Operating Pressure:

690 bar




Hexagon Bolt and Nut Sizes

See the table for hexagon sizes of bolts, nuts and related thread diameters.

Page: 275

W-Series, Metric Cassettes and Reducers

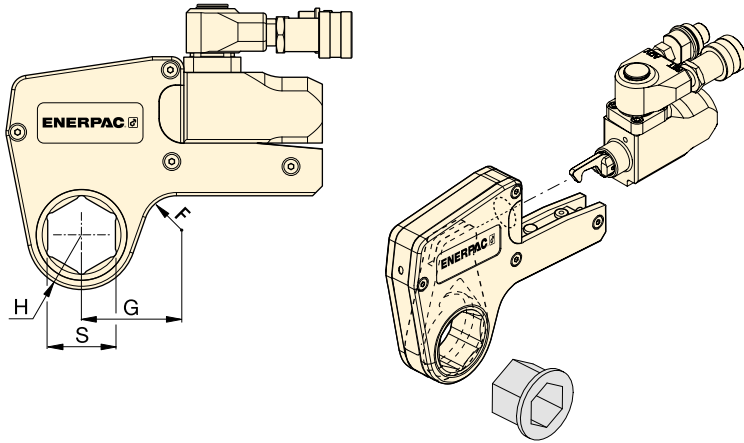

W Series X-Edition







Hexagon Range:

24 - 105 mm

Maximum Operating Pressure:


690 bar

▼ SELECTION CHART

| Drive Unit Model Number | Hexagon Size ¹⁾ | Nose Radius | Dim. | Model Nr. Cassette |  |  | |  | |  | |
|------------------------------|----------------------------|-------------|---------|--------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|----------------------|-------------------------------------------------------------------------------------|----------------------|-------------------------------------------------------------------------------------|----------------------|
| | | | | | | Hexagon Reducer (mm) | Model Number Reducer | Hexagon Reducer (mm) | Model Number Reducer | Hexagon Reducer (mm) | Model Number Reducer |
| W2000X (2766 Nm) | 30 | 31 | 54 | W2103X | 2,1 | - | - | - | - | - | - |
| | 32 | 31 | 54 | W2104X | 2,1 | - | - | - | - | - | - |
| | 36 | 31 | 54 | W2107X | 2,1 | - | - | - | - | - | - |
| | 38 | 34 | 58 | W2108X | 2,2 | - | - | - | - | - | - |
| | 41 | 34 | 58 | W2110X | 2,2 | 41 - 32 | W2110R104 | 41 - 30 | W2110R103 | 41 - 24 | W2110R024M |
| | 46 | 34 | 61 | W2113X | 2,2 | 46 - 36 | W2113R107 | 46 - 32 | W2113R104 | - | - |
| | 50 | 39 | 63 | W2200X | 2,2 | 50 - 41 | W2200R110 | 50 - 36 | W2200R107 | - | - |
| | 55 | 42 | 69 | W2203X | 2,3 | 55 - 46 | W2203R113 | 55 - 41 | W2203R110 | 55 - 36 | W2203R107 |
| | 60 | 45 | 65 | W2206X | 2,2 | 60 - 50 | W2206R200 | 60 - 46 | W2206R113 | 60 - 41 | W2206R110 |
| | - | - | - | - | - | - | 60 - 36 | W2206R107 | - | - | - |
| W4000X (5661 Nm) | 36 | 37 | 61 | W4107X | 3,7 | - | - | - | - | - | - |
| | 41 | 37 | 61 | W4110X | 3,7 | - | - | - | - | - | - |
| | 46 | 40 | 64 | W4113X | 3,8 | - | - | - | - | - | - |
| | 50 | 42 | 67 | W4200X | 3,9 | 50 - 36 | W4200R107 | - | - | - | - |
| | 55 | 44 | 73 | W4203X | 4,0 | 55 - 41 | W4203R110 | 55 - 36 | W4203R107 | 55 - 32 | W4203R104 |
| | 60 | 47 | 71 | W4206X | 4,1 | 60 - 50 | W4206R200 | 60 - 46 | W4206R113 | 60 - 36 | W4206R107 |
| | 65 | 50 | 76 | W4209X | 4,1 | 65 - 55 | W4209R203 | 65 - 50 | W4209R200 | 65 - 46 | W4209R113 |
| | 70 | 53 | 78 | W4212X | 4,2 | 70 - 60 | W4212R206 | 70 - 55 | W4212R203 | - | - |
| | 75 | 55 | 82 | W4215X | 4,3 | 75 - 65 | W4215R209 | 75 - 60 | W4215R206 | - | - |
| | - | - | - | W4215X | - | 75 - 55 | W4215R203 | 75 - 50 | W4215R200 | - | - |
| | 80 | 59 | 84 | W4302X | - | - | - | 80 - 70 | W4302R212 | 80 - 65 | W4302R209 |
| - | - | - | W4302X | - | 80 - 55 | W4302R203 | 80 - 50 | W4302R200 | - | - | |
| 85 | 62 | 86 | W4085MX | 4,5 | - | - | - | - | - | - | |
| W8000X (11.484 Nm) | 50 | 45 | 78 | W8200X | 8,1 | - | - | - | - | - | - |
| | 55 | 48 | 80 | W8203X | 8,1 | - | - | - | - | - | - |
| | 60 | 51 | 83 | W8206X | 8,1 | - | - | - | - | - | - |
| | 65 | 56 | 85 | W8209X | 8,1 | 65 - 50 | W8209R200 | - | - | - | - |
| | 70 | 56 | 85 | W8212X | 7,9 | 70 - 55 | W8212R203 | - | - | - | - |
| | 75 | 58 | 85 | W8215X | 7,9 | 75 - 60 | W8215R206 | 75 - 55 | W8215R203 | - | - |
| | 80 | 61 | 90 | W8302X | 8 | 80 - 65 | W8302R209 | 80 - 60 | W8302R206 | 80 - 55 | W8302R203 |
| | - | - | - | - | - | 80 - 50 | W8302R200 | - | - | - | - |
| | 85 | 66 | 92 | W8085MX | 8,2 | 85 - 70 | W8085R070M | 85 - 65 | W8085R065M | 85 - 60 | W8085R060M |
| | - | - | - | - | - | 85 - 55 | W8085R055M | - | - | - | - |
| | 90 | 74 | 103 | W8090MX | 8,8 | 90 - 75 | W8090R075M | - | - | - | - |
| | 95 | 74 | 103 | W8312X | 8,8 | 95 - 80 | W8312R302 | 95 - 75 | W8312R215 | - | - |
| | 100 | 80 | 110 | W8315X | 9,3 | - | - | - | - | - | - |
| 105 | 80 | 110 | W8402X | 9,3 | - | - | - | - | - | - | |

¹⁾ See page 275 for table of hexagon sizes of bolts, nuts and related thread diameters.

W-Series, Metric Cassettes and Reducers



Hexagon Range:
50 - 155 mm

Maximum Operating Pressure:
690 bar

W
Series
X-Edition



▼ SELECTION CHART

| Drive Unit Model Number | Hexagon Size ¹⁾ | Nose Radius | Dim. | Model Nr. Cassette | Weight (kg) | Hexagon Reducer | | Model Number Reducer | |
|-------------------------------|----------------------------|-------------|----------|--------------------|-------------|----------------------|----------------------|----------------------|----------------------|
| | | | | | | Hexagon Reducer (mm) | Model Number Reducer | Hexagon Reducer (mm) | Model Number Reducer |
| W15000X (20.785 Nm) | 65 | 59 | 89 | W15209X | 13,6 | - | - | - | - |
| | 70 | 59 | 89 | W15212X | 13,6 | - | - | - | - |
| | 75 | 62 | 91 | W15215X | 13,7 | - | - | - | - |
| | 80 | 65 | 93 | W15302X | 13,8 | 80 - 65 | W15302R209 | - | - |
| | 85 | 70 | 97 | W15085MX | 14,1 | 85 - 70 | W15085R070M | - | - |
| | 90 | 75 | 102 | W15090MX | 14,5 | 90 - 75 | W15090R75M | - | - |
| | 95 | 75 | 102 | W15312X | 14,6 | 95 - 80 | W15312R302 | 95 - 75 | W15312R215 |
| | 100 | 81 | 103 | W15315X | 14,8 | - | - | - | - |
| | 105 | 81 | 103 | W15402X | 14,8 | 105 - 90 | W15402R090M | - | - |
| | 110 | 88 | 115 | W15405X | 15,1 | 110 - 95 | W15110R095M | - | - |
| | 115 | 88 | 115 | W15115MX | 15,1 | 115 - 100 | W15115R100M | - | - |
| W22000X (30.506 Nm) | 75 | 67 | 102 | W22215X | 22,0 | - | - | - | - |
| | 80 | 67 | 102 | W22302X | 21,6 | 80-60 | W22302R206 | 80 - 55 | W22302R203 |
| | 85 | 73 | 107 | W22085MX | 22,5 | 85-65 | W22085MR209 | 85 - 60 | W22085MR206 |
| | 90 | 78 | 113 | W22090MX | 23,4 | 90-70 | W22090M212 | 90 - 60 | W22090MR206 |
| | 95 | 78 | 113 | W22312X | 22,9 | 95-75 | W22312R215 | - | - |
| | 100 | 85 | 120 | W22315X | 24,3 | - | - | - | - |
| | 105 | 85 | 120 | W22402X | 23,4 | - | - | - | - |
| | 110 | 90 | 125 | W22405X | 24,6 | - | - | - | - |
| | 115 | 90 | 125 | W22115MX | 24,0 | - | - | - | - |
| | 120 | 95 | 130 | W22412X | 24,7 | - | - | - | - |
| | 123 | 95 | 130 | W22123MX | 24,4 | - | - | - | - |
| W35000X (47.454 Nm) | 130 | 100 | 135 | W22502X | 25,0 | - | - | - | - |
| | 135 | 100 | 135 | W22506X | 23,9 | 135 - 105 | W22506R402 | - | - |
| | 80 | 77 | 129 | W35302X | 32,8 | 80 - 50 | W35302R200 | - | - |
| | 85 | 77 | 129 | W35085MX | 32,3 | - | - | - | - |
| | 90 | 82 | 135 | W35090MX | 33,5 | 90 - 60 | W35090R206 | - | - |
| | 95 | 82 | 135 | W35312X | 32,9 | - | - | - | - |
| | 100 | 88 | 139 | W35315X | 34,1 | - | - | - | - |
| | 105 | 88 | 139 | W35402X | 33,5 | - | - | - | - |
| | 110 | 94 | 146 | W35405X | 34,9 | 110 - 85 | W35405R085M | - | - |
| | 115 | 94 | 146 | W35115MX | 34,2 | - | - | - | - |
| | 120 | 100 | 153 | W35412X | 35,6 | 120 - 95 | W35412R312 | - | - |
| | 123 | 100 | 153 | W35123MX | 35,0 | - | - | - | - |
| | 130 | 104 | 160 | W35502X | 35,8 | 130 - 105 | W35502R402 | - | - |
| | 135 | 104 | 160 | W35506X | 34,6 | 135 - 110 | W35506R405 | - | - |
| | 140 | 110 | 163 | W35508X | 36,2 | 140 - 115 | W35508R115M | - | - |
| | 145 | 110 | 163 | W35512X | 34,9 | 145 - 120 | W35512R412 | - | - |
| | 150 | 115 | 169 | W35514X | 36,7 | - | - | - | - |
| 151 | 115 | 169 | W35151MX | 36,5 | - | - | - | - | |
| 155 | 115 | 169 | W35602X | 35,3 | 155 - 130 | W35602R502 | - | - | |

¹⁾ See page 275 for table of hexagon sizes of bolts, nuts and related thread diameters.

W-SL, Series, UltraSlim Bi-Hexagonal Cassettes

▼ W4206SL ultraslim bi-hexagonal stepped width cassette with W4000X drive unit



Versatility

- Lean, stepped width design allows tool to be mounted over bolts where other tools won't fit
- Bi-Hexagonal cassette allows twice as many positioning points on nut or bolt
- Robust top mounted handle stays out of the way, providing safe fastening in hard to reach areas
- Uses same drive unit as standard W-series hexagon cassettes

Performance

- Premium components provide best-in-class endurance compared to other limited access tools

Ease of Use

- Few moving parts are easily accessible for quick field maintenance
- Fast release drive unit enables rapid exchange of cassettes, no tools required
- Top mounted straight handle for improved tool handling and safety

Accuracy

- Constant torque output provides accuracy of $\pm 3\%$ across the full stroke
- Calibration certificate shipped with every cassette.

Slim enough to fit and tough enough to last. This UltraSlim wrench is the perfect controlled bolting solution for this oil and gas flange. ►

Your easy and long lasting solution to difficult access bolting applications



UltraSlim: Designed for Tight Spots

Stepped width design provides easy access in confined areas. UltraSlim cassettes fit where standard solutions won't.



Built to Outperform

High endurance components keep working when others fail.



Top Mounted Straight Handle

The top mounted straight handle is standard and provides safe and easy positioning and access to hard to reach fasteners.

| | |
|----------------------------|--------------|
| Straight handle (standard) | SWH6S |
| Angled handle (optional) | SWH6A |



ATEX declared. Calibration certificate included.

All UltraSlim Series cassettes are CE - ATEX declared and are shipped complete with a calibration certificate.

CE  II 2 GD T4



UltraSlim Bi-Hexagonal Cassettes




UltraSlim Bi-Hexagonal Cassettes

Accessing narrow spaces normally requires significantly reducing the width of the torque wrench. For the tool operator, this has always meant vastly reduced tool durability, and/or reduced torque output.

By using the highest grade materials, perfecting the geometry, and placing the positioning handle on top of the tool for safe fastening, Enerpac UltraSlim cassettes are able to provide greater torque, get into tighter spaces, and vastly outperform the competition in product durability*.

Durability of Key Components*

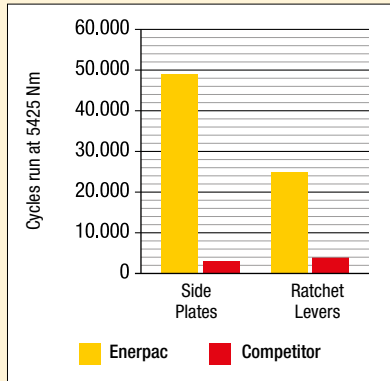

* Average test results, whereby three Enerpac 46 mm UltraSlim cassettes and three competitor 46 mm cassettes were tested at 5425 Nm for 50,000 cycles. The Enerpac side plates never broke for the full duration of the test.

W-SL Series UltraSlim



Nominal Torque Output:

5911 Nm

Bi-Hexagonal Range:

46 - 75 mm

Maximum Operating Pressure:

690 bar



Torque Wrench Pumps

System matched air and electric torque wrench pumps that are ideal for use with hydraulic torque wrenches.


Page: 212



Torque Wrench Hoses

Use Enerpac THQ-700 Series torque wrench hoses with W-Series torque wrenches to ensure the integrity of your hydraulic system.

| | |
|--------------------|-----------------|
| 6 m long, 2 hoses | THQ-706T |
| 12 m long, 2 hoses | THQ-712T |

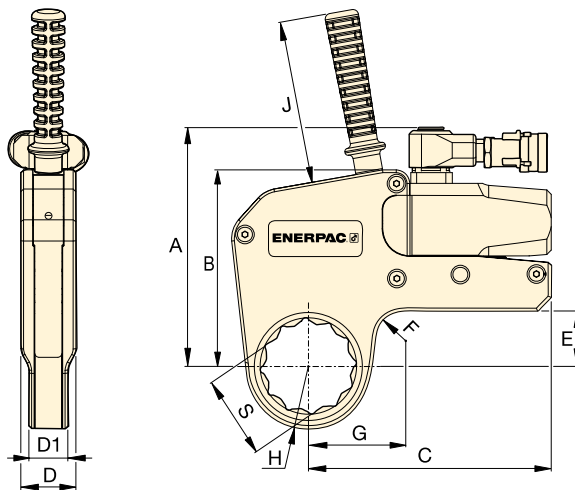

SELECTION CHART

| Bi-Hexagonal Size | Nominal Torque @ 690 bar | UltraSlim Cassette * Model Nr. | Minimum Torque @ 69 bar | Nose Radius | Dimensions (mm) | | | | | | | | | | Drive Unit Model Nr. ** (sold separately) | | | | | | | | | | | | | | | | | | |
|-------------------|---------------------------------|--------------------------------|-------------------------|-------------|-----------------|------|---|---|---|----|---|---|---|------|-------------------------------------------|----|--------------------------------|------|----------------|-----|------|------|-------|-------|-------|------|------|------|------|-----|-----|---------------|---------------|
| | | | | | G | A | B | C | D | D1 | E | F | J | (kg) | | | | | | | | | | | | | | | | | | | |
| S (mm) (inch) | (Nm) | | (Nm) | H (mm) | G | A | B | C | D | D1 | E | F | J | (kg) | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | 46 | 1 ³ / ₁₆ | 2685 | W2113SL | 269 | 36,5 | 59,6 | | | | | | | | | 2,2 | | |
| | | | | | | | | | | | | | | | | 55 | 2 ³ / ₁₆ | 2685 | W2203SL | 269 | 41,5 | 63,2 | 140,7 | 109,3 | 147,7 | 32,4 | 25,4 | 24,0 | 20,0 | 120 | 2,2 | W2000X | |
| | | | | | | | | | | | | | | | | 60 | 2 ³ / ₈ | 2685 | W2206SL | 269 | 44,5 | 65,1 | | | | | | | | | 2,2 | | |
| | | | | | | | | | | | | | | | | 55 | 2 ³ / ₁₆ | 5911 | W4203SL | 591 | 44,0 | 68,7 | | | | | | | | | | 4,6 | W4000X |
| | | | | | | | | | | | | | | | | 60 | 2 ³ / ₈ | 5911 | W4206SL | 591 | 48,0 | 71,6 | | | | | | | | | 4,7 | | |
| | | | | | | | | | | | | | | | | 65 | 2 ³ / ₁₆ | 5911 | W4209SL | 591 | 50,5 | 74,1 | 175,6 | 144,5 | 178,5 | 40,5 | 28,6 | 40,8 | 20,0 | 120 | 4,7 | | |
| | | | | | | | | | | | | | | | | 70 | 2 ³ / ₄ | 5911 | W4212SL | 591 | 53,5 | 75,6 | | | | | | | | | 4,7 | | |
| 75 | 2 ¹⁵ / ₁₆ | 5911 | W4215SL | 591 | 56,0 | 76,0 | | | | | | | | | 4,7 | | | | | | | | | | | | | | | | | | |

* Bi-Hexagonal Cassette includes top mounted straight handle.

** Cassette may also be used with W2000PX and W4000PX drive units, featuring double-swivel manifolds. Weight of drive unit W2000X = 1,4 kg; W4000X = 2,0 kg.

WCR-Series, Roller Cassette Torque Wrench

▼ WCR4000 Roller Cassette with Spanner and W4000X Drive Unit



- Provides a safe and reliable controlled bolting solution for flanges with limited access
- Spanners available to fit most commonly used API flanges
- Small nose radius – resolves bolt to pipe restrictions
- Slim spanner design – reduces bolt height restrictions
- Wide range of spanners ranging from 36 - 80 mm (1⁷/₁₆ - 3¹/₈ inch)
- Includes handle to improve tool handling and safety
- Rigid steel body for maximum endurance and minimum downtime.

Bi-Hexagonal Spanner Size:

36 - 80 mm, 1⁷/₁₆ - 3¹/₈"

Spanner Nose Radius:

31 - 55 mm

Nominal Torque:

5762 Nm (4250 Ft.lbs)

Maximum Operating Pressure:

690 bar





WCR-4000 Applications

The WCR4000 helps resolve narrow clearance restrictions in bolting of API and BOP flanges.


The Enerpac WCR4000 Roller Cassette has been developed for applications where there are severe clearance restrictions, particularly in height above the nut or between the bolt center and the inside of the joint.

Powered by the standard W4000X drive unit which is compatible with standard W-Series hexagon cassettes. The WCR-wrench must be removed and repositioned after each wrench cycle by operating the pump in the retract direction. The tool contains no spring return.

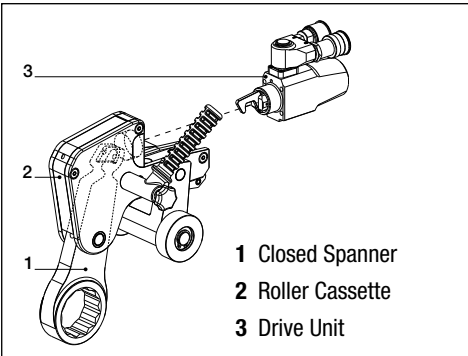


| Closed Spanner Hexagon Size S (inch) (mm) | Closed Spanner Model Number | Nominal Torque (Nm) | Spanner Radius R (mm) |  * (kg) | Roller Cassette Assembly Model Nr. | Drive Unit Model Nr. |
|---------------------------------------------|-----------------------------|---------------------|-----------------------|--------------------------------------------------------------------------------------------|------------------------------------|----------------------|
| 1 ⁷ / ₁₆ 36 | W4107CS | 5762 | 31 | 1,9 | WCR4000 | W4000X |
| 1 ¹ / ₂ 38 | W4108CS | 5762 | 33 | 2,0 | | |
| 1 ⁵ / ₈ 41 | W4110CS | 5762 | 33 | 1,9 | | |
| 1 ³ / ₁₆ 46 | W4113CS | 5762 | 36 | 1,9 | | |
| 1 ⁷ / ₈ 48 | W4114CS | 5762 | 38 | 2,1 | | |
| 2 50 | W4200CS | 5762 | 38 | 1,9 | | |
| 2 ³ / ₁₆ 55 | W4203CS | 5762 | 41 | 2,0 | | |
| 2 ³ / ₈ 60 | W4206CS | 5762 | 45 | 2,1 | | |
| 2 ⁹ / ₁₆ 65 | W4209CS | 5762 | 47 | 2,1 | | |
| 2 ³ / ₄ 70 | W4212CS | 5762 | 50 | 2,1 | | |
| 2 ¹⁵ / ₁₆ 75 | W4215CS | 5762 | 52 | 2,1 | | |
| 3 ¹ / ₈ 80 | W4302CS | 5762 | 55 | 2,2 | | |

* Spanner weight. For total weight add 6,3 kg for WCR4000 and 2,0 kg for W4000X.

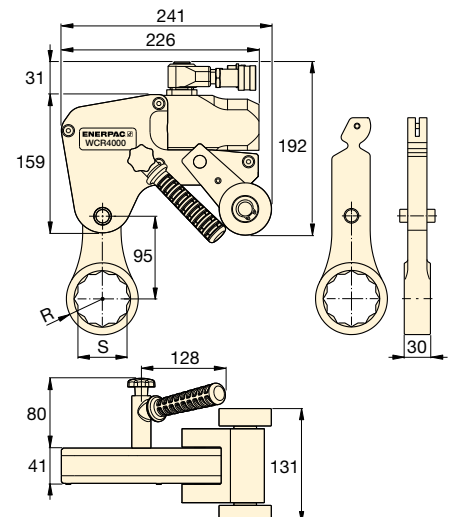

Accessories for W-Series, X-Edition Wrenches

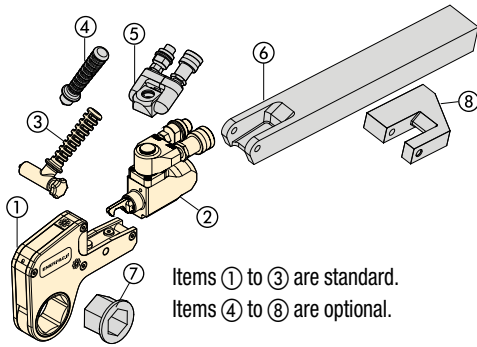


- ① Hexagon Cassette
- ② Drive Unit
- ③ Angled Positioning Handle
- ④ Straight Positioning Handle
- ⑤ Pro Series Swivel
- ⑥ Extended Reaction Arm
- ⑦ Reducer Insert
- ⑧ Reaction Paddle

Items ① to ③ are standard.
Items ④ to ⑧ are optional.

TSP WTE WRP Series



TSP-Series, Pro Series Swivel

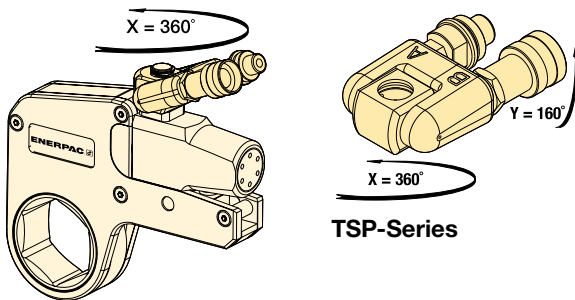


- Robust interlocking design
- 360° X-axis and 160° Y-axis rotation
- Increases tool fit in restricted access areas
- Simplifies hose placement
- Includes male and female couplers

| For Torque Wrench Model Number | Model Number ¹⁾ | Maximum Pressure (bar) | Weight (kg) |
|---------------------------------------------------|----------------------------|------------------------|-------------|
| W2000X, W4000X, W8000X, W15000X, W22000X, W35000X | TSP300 | 690 | 0,2 |

¹⁾ To order a W-Series (X-edition) drive unit fitted with a TSP300 tilt and swivel manifold, insert a "P" prior to the "X" in the tool model number, example: **W2000PX**. TSP300 is designed for X-Edition tools only, and is not compatible with standard edition tools. For replacement components for existing tools, refer to repair sheet on www.enerpac.com

WTE-Series, Extended Reaction Arm

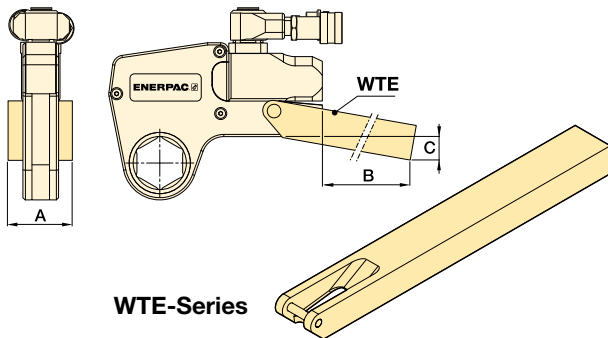


- Full torque rated
- Increases tool fit in restricted access areas.

| For Torque Wrench Model Number | Model Number | Dimensions (mm) | | | Weight (kg) * |
|--------------------------------|--------------|-----------------|-----|-----|---------------|
| | | A | B | C | |
| W2000X | WTE20 | 56 | 398 | 76 | 2,6 |
| W4000X | WTE40 | 66 | 436 | 74 | 4,6 |
| W8000X | WTE80 | 85 | 449 | 55 | 7,6 |
| W15000X | WTE150 | 102 | 498 | 72 | 12,0 |
| W22000X | WTE220 | 114 | 524 | 77 | 17,3 |
| W35000X | WTE350 | 127 | 419 | 133 | 17,8 |

* Weights indicated are for the accessories only and do not include the wrench.

WRP-Series, Low Profile Reaction Paddles

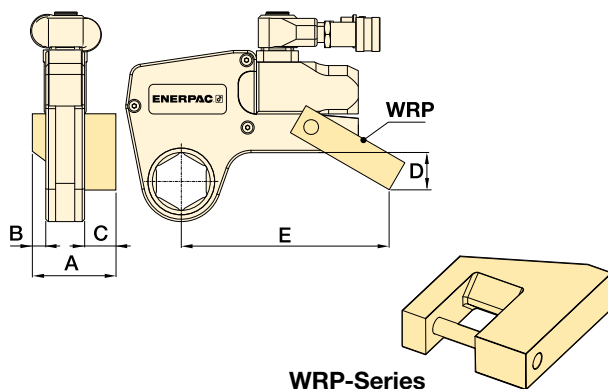

- Lightweight interchangeable design
- Allows for offset reaction when in-line reaction is not available.

| For Torque Wrench Model Nr. | Model Number | Dimensions (mm) | | | | | Weight (kg) * |
|-----------------------------|--------------|-----------------|----|----|-----|-----|---------------|
| | | A | B | C | D | E | |
| W2000X | WRP20 | 84 | 16 | 35 | 45 | 148 | 0,4 |
| W4000X | WRP40 | 109 | 21 | 47 | 59 | 190 | 0,8 |
| W8000X | WRP80 | 137 | 26 | 57 | 69 | 223 | 2,0 |
| W15000X | WRP150 | 165 | 32 | 69 | 87 | 257 | 3,9 |
| W22000X | WRP220 | 207 | 37 | 91 | 134 | 317 | 7,2 |
| W35000X | WRP350 | 225 | 42 | 91 | 182 | 367 | 10,6 |

* Weights indicated are for the accessories only and do not include the wrench.

▼ PTW1000



Productivity

- High speed continuous rotation for constant torque output
- Low friction planetary gearbox design minimizes wear and extends uptime.

Safety

- Ergonomic, low vibration design reduces fatigue and the risk of vibration related injuries for the operator
- Low noise air motor provides quiet, consistent performance for indoor and outdoor applications.

Convenience

- Provided with standard reaction arm; wide assortment of custom arms and accessories are available
- Available with or without Filter-Regulator-Lubricator (FRL)
- Unique calibration certificate provided with each tool.



◀ The PTW1000 makes quick work of this flange maintenance job.

Continuous Rotation Controlled Torque



Calibration Certificate

All PTW-Series tools are CE declared and are shipped complete with a calibration certificate.



Typical Pneumatic Torque Wrench Applications

Oil and Gas, MRO

- Pipe flanges
- Valves
- Man-way covers
- Pressure vessels.

Power Generation

- Turbine bolts
- Tower segments
- Turbine casings.

Mining

- Track maintenance
- Undercarriage maintenance
- Wheel maintenance
- Shovel maintenance.

▼ PTW-Series Pneumatic Torque Wrenches are ideal for applications where speed and precision are critical, such as track maintenance.



Pneumatic Torque Wrenches



PTW-Series, Pneumatic Torque Wrenches

Enerpac PTW-Series Pneumatic Torque Wrenches are designed for applications that require speed and control.

The standard package includes a Torque Wrench with a calibration certificate, an FRL (Filter/Regulator/Lubricator), and a 3 m long, ½" inch (13 mm) diameter air hose, which connects the FRL to the wrench.

Once the air hoses are connected, the operator simply adjusts the air pressure on

the FRL to achieve the desired torque using the calibration certificate. After this, the tool is ready to go to work! *

The air source used with the PTW system must be regulated and/or limited to 8,3 bar, and must be capable of providing a volume of at least (85 m³/h) at 6,9 bar. A separate ½" inch hose (not included) must be used to connect the FRL to the air supply.

* See instruction manual for comprehensive instructions.

PTW Series



Nominal Torque Output:

8135 Nm

Square Drive Range:

1 - 1½ inch



Accessories

Enerpac offers a full line of accessories including a range of reaction arms and drives.

Page: **210**



FRL120C, Filter-Regulator-Lubricator with air hose

All PTW-Series tools are shipped complete with standard reaction arm, and Filter-Regulator-Lubricator (FRL120C).



BSH-Series Sockets


Heavy-Duty Impact Sockets for power driven torquing equipment.

Page: **190**




Hydraulic Torque Wrenches

Enerpac offers a complete range of square drive and hexagon cassette torque wrenches.

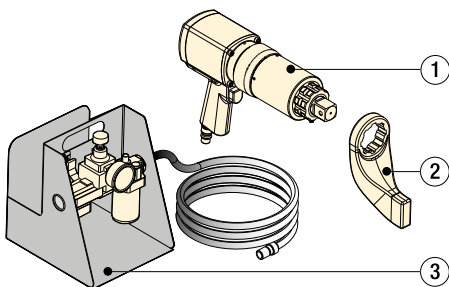

- ① PTW Torque Wrench
- ② Standard Reaction Arm
- ③ FRL120C Filter-Regulator-Lubricator with 3 meters air hose

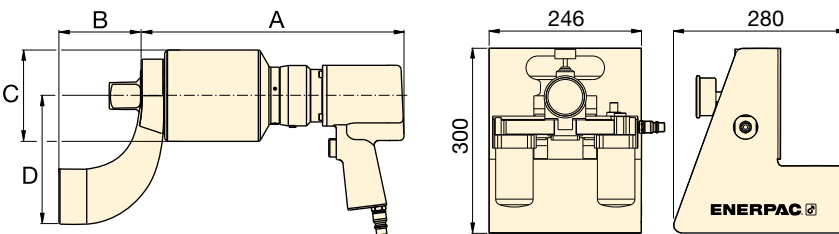

▼ SELECTION CHART

All tools are shipped complete with standard reaction arm and FRL120C.

| Minimum Torque | | Nominal Torque | | Square Drive (inch) | Model Number ¹⁾ (FRL120C included) | Speed (RPM) | Dimensions (mm) | | | | Weight (kg) ²⁾ |
|----------------|----------|----------------|----------|---------------------|-----------------------------------------------|-------------|-----------------|-----|-----|-----|---------------------------|
| (Nm) | (Ft.lbs) | (Nm) | (Ft.lbs) | | | | A | B | C | D | |
| 407 | 300 | 1356 | 1000 | 1 | PTW1000C | 12,6 | 272 | 83 | 72 | 130 | 8,2 |
| 678 | 500 | 2712 | 2000 | 1 | PTW2000C | 8,0 | 286 | 83 | 79 | 133 | 8,8 |
| 1220 | 900 | 4067 | 3000 | 1 | PTW3000C | 3,1 | 343 | 83 | 95 | 133 | 10,4 |
| 1763 | 1300 | 8135 | 6000 | 1½ | PTW6000C | 2,5 | 366 | 114 | 127 | 178 | 17,7 |

¹⁾ To order without FRL120C, remove "C" suffix from model number (example: **PTW3000**).

²⁾ Weight does not include reaction arm. Reaction arm weight for PTW1000, PTW2000, PTW3000 is 1,3 kg and for PTW6000 is 3,5 kg.

▼ TW3000EI (torque wrench shown without servo motor cable)



Versatility

- Patented firmware design provides accurate fastening on soft or pre-tightened joints when accuracy is critical
- Single control box may be used to operate multiple wrench models
- Wrenches and control boxes may be purchased separately or as a calibrated set.

Performance

- High speed continuous rotation gets the job done faster
- Torque and angle functionality allows input of nominal torque value followed by a specific angle of rotation
- Pass/Fail LED indicator on back of tool verifies fastening has been completed according to specified input.

Simplicity

- Control box with 7-inch touchscreen simplifies tool operation
- Controls on back of wrench enable operator to monitor and manage the fastening process without returning to the control box
- Brightly lit three line LED display on wrench is easy to read in any environment, even in bright sunlight.

Traceability

- Fastening record can be viewed on-screen and transferred through standard USB connection on the control box
- Each tool is performance tested and shipped complete with a factory calibration certificate.

Safety

- Lift points on wrench enable use with positioning handle or lifting device for greater handling safety
- Ground fault detector protects operator in the event of insufficient grounding.

Your Simple Solution for Smart Bolting



Touchscreen Control Box

ETW-Series tools feature an easy to use, interactive touch-screen control box, which helps make even the most complex jobs simple to complete.

Single control box may be used to operate multiple wrench models.

Firmware upgrades may be uploaded online and easily transferred to the tool via a USB connection.



Easy Access to Controls

Controls on back of wrench with LED display allow user to directly input desired torque, change direction of rotation, and monitor the fastening process.



Certifications and Declarations

All ETW-Sets and TW-tools are:

- CE declared
- Shipped complete with a calibration certificate
- Certified for North American Electrical Safety by CSA International
- Carry a CSA US and Canada mark.



▼ ETW-Series Electric Torque Wrenches are ideal for high volume fastening applications that require precision and traceability, such as this wind tower job.





ETW-Series, Electric Torque Wrenches

Enerpac ETW-Series Electric Torque Wrenches are particularly well suited to complex jobs which demand precision and traceability.


The ETW-Series tools feature an automatic mode, which helps simplify and automate complex jobs, including those with torque and angle specifications, through the creation of presets.

Using the touchscreen, simply input the number of fasteners and desired torque value for each fastening step, followed by the required angle of turn. This sequence may then be saved as an automatic preset for future use.

For simpler jobs, torque values may be input with a digital slider on the touchscreen, or directly into the rear control panel of the wrench.



Once the input torque is achieved, the tool stalls, and a pass/fail indicator verifies that it is ready to move on to the next fastener.

When the job is completed, the fastening record can be viewed on the touch screen, or exported to a computer via a USB connection on the control box.

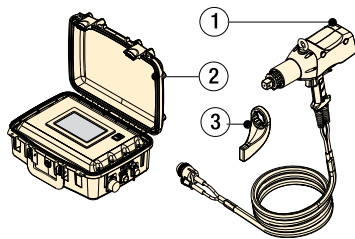

ETW-Set

- ① ETW Torque Wrench with 6m servo motor cable
- ② Control Box with 2m power cord
- ③ Standard Reaction Arm

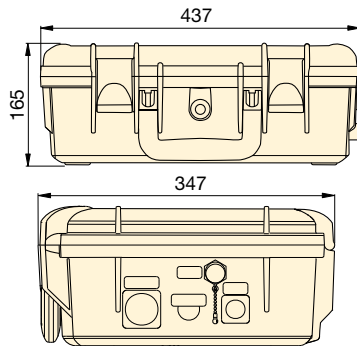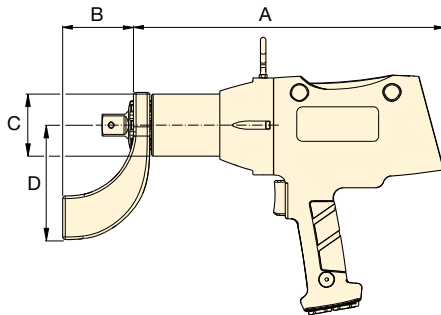

ETW-torque wrench

ETWCB-control box

| Minimum Torque | | Nominal Torque | | Square Drive (inch) | ETW-Set Model Number | ETW-Set includes | | Voltage | Nominal Speed (RPM) | Dimensions (mm) | | | | Weight (kg) ¹⁾ |
|----------------|----------|----------------|----------|---------------------|----------------------|--------------------------------|-------------------------------------|------------|---------------------|-----------------|-----|-----|-----|---------------------------|
| (Nm) | (Ft.lbs) | (Nm) | (Ft.lbs) | | | Wrench Model Nr. ²⁾ | Control Box Model Nr. ²⁾ | | | A | B | C | D | |
| 270 | 200 | 1355 | 1000 | 1 | ETW1000B | TW1000B | ETWCB-B | 115V 60 Hz | 9,8 | 365 | 83 | 72 | 130 | 8,2 |
| 270 | 200 | 1355 | 1000 | 1 | ETW1000I | TW1000EI | ETWCB-I | 230V 60 Hz | 15,2 | 365 | 83 | 72 | 130 | 8,2 |
| 270 | 200 | 1355 | 1000 | 1 | ETW1000E | TW1000EI | ETWCB-E | 230V 50 Hz | 15,2 | 365 | 83 | 72 | 130 | 8,2 |
| 540 | 400 | 2710 | 2000 | 1 | ETW2000B | TW2000B | ETWCB-B | 115V 60 Hz | 5,8 | 380 | 83 | 79 | 133 | 8,9 |
| 540 | 400 | 2710 | 2000 | 1 | ETW2000I | TW2000EI | ETWCB-I | 230V 60 Hz | 9,0 | 380 | 83 | 79 | 133 | 8,9 |
| 540 | 400 | 2710 | 2000 | 1 | ETW2000E | TW2000EI | ETWCB-E | 230V 50 Hz | 9,0 | 380 | 83 | 79 | 133 | 8,9 |
| 810 | 600 | 4065 | 3000 | 1 | ETW3000B | TW3000B | ETWCB-B | 115V 60 Hz | 2,8 | 436 | 83 | 95 | 133 | 11,9 |
| 810 | 600 | 4065 | 3000 | 1 | ETW3000I | TW3000EI | ETWCB-I | 230V 60 Hz | 4,3 | 436 | 83 | 95 | 133 | 11,9 |
| 810 | 600 | 4065 | 3000 | 1 | ETW3000E | TW3000EI | ETWCB-E | 230V 50 Hz | 4,3 | 436 | 83 | 95 | 133 | 11,9 |
| 1625 | 1200 | 8135 | 6000 | 1½ | ETW6000B | TW6000B | ETWCB-B | 115V 60 Hz | 1,9 | 453 | 114 | 127 | 178 | 19,1 |
| 1625 | 1200 | 8135 | 6000 | 1½ | ETW6000I | TW6000EI | ETWCB-I | 230V 60 Hz | 2,9 | 453 | 114 | 127 | 178 | 19,1 |
| 1625 | 1200 | 8135 | 6000 | 1½ | ETW6000E | TW6000EI | ETWCB-E | 230V 50 Hz | 2,9 | 453 | 114 | 127 | 178 | 19,1 |

¹⁾ Wrench weight does not include reaction arm. Standard reaction arm weight for ETW1000, ETW2000, ETW3000 is 1,3 kg and for ETW6000 is 3,5 kg. Standard reaction arm included with TW-model. Weight of the control box is 9 kg.

²⁾ Use of ETW requires both wrench and control box. These may be purchased separately, or as a calibrated set.

ETW Series



Nominal Torque Output:

8135 Nm

Square Drive Range:

1 - 1½ inch



Accessories

Enerpac offers a full line of accessories including a range of reaction arms and drives.

Page: **210**



BSH-Series Sockets

Heavy-Duty Impact Sockets for power driven torquing equipment.


Page: **190**

Voltage: (Model Number ending with suffix)

B = 115V, 60 Hz

I = 230V, 60 Hz (with NEMA 6-15 plug)

E = 230V, 50 Hz (with commonly used European (SCHUKO) plug)

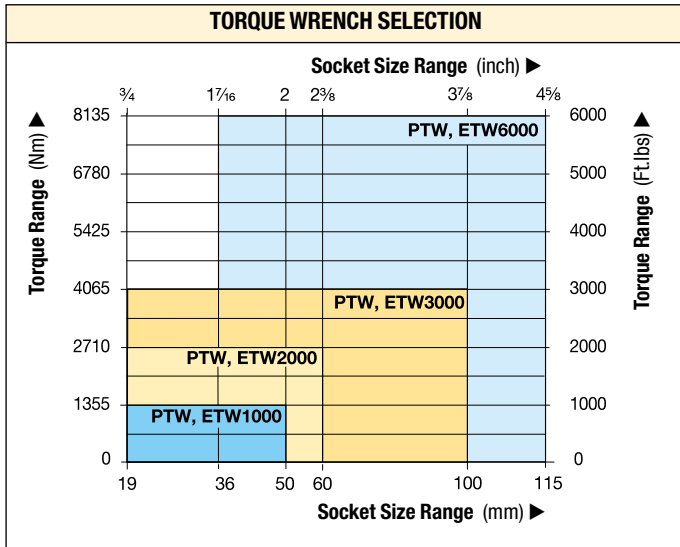

PTW, ETW Series




Nominal Torque Output:

8135 Nm

Square Drive Range:

1 - 1 1/2 inch

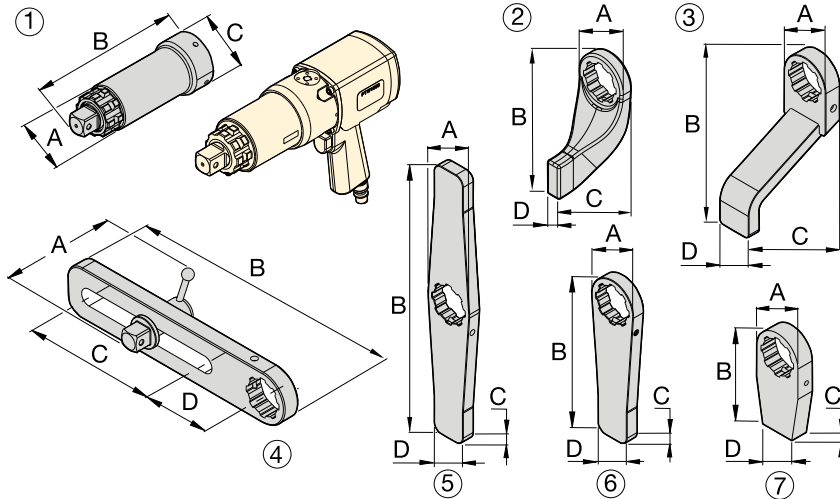

BSH-Series Sockets

Heavy-Duty Impact Sockets for power driven torquing equipment.

Page: **190**



PTW and ETW-Accessories

Enerpac offers the following accessories to support a wide variety of applications in industries such as mining, power generation and oil & gas. For additional custom accessories not pictured here, please contact Enerpac.

Optional Accessories

For use with PTW and ETW1000, 2000, 3000-models

| Nr. | Description | Model Nr. | Application | Dimensions (mm) | | | |
|-----|----------------------------------|----------------|-------------------------------------------------|-----------------|-----|-----|-----|
| | | | | A | B | C | D |
| 1 | Extended Drive, 6 inch (152 mm) | ED6TWS | Nose extension, primarily for truck wheel bolts | 62 | 206 | 73 | – |
| 1 | Extended Drive, 12 inch (305 mm) | ED12TWS | Nose extension, primarily for truck wheel bolts | 62 | 384 | 73 | – |
| 1 | Extended Drive, 18 inch (457 mm) | ED18TWS | Nose extension, primarily for truck wheel bolts | 62 | 511 | 73 | – |
| 2 | Standard Reaction Arm | RATWS | Standard arm included with PTW and ETW model | 76 | 172 | 102 | 21 |
| 3 | Extended Reaction Arm | ERATWS | Long plate for use with deep well sockets | 73 | 150 | 202 | 51 |
| 4 | Sliding Reaction Arm | SLRATWS | For widely spaced and uneven bolt centers | 112 | 381 | 203 | 102 |
| 5 | Double Straight Reaction Arm | DSATWS | Reduces time to reposition arm * | 73 | 406 | 19 | 102 |
| 6 | Straight Reaction Arm | SRATWS | Long plate for wide spaced reaction points | 73 | 240 | 19 | 51 |
| 7 | Blank Reaction Arm ** | BLTWS | Weldable blank for custom applications ** | 72 | 151 | 25 | 51 |

For use with PTW and ETW6000-models

| | | | | | | | |
|---|---------------------------------|----------------|-------------------------------------------------|-----|-----|-----|-----|
| 1 | Extended Drive 6 inch (152 mm) | ED6TWL | Nose extension, primarily for truck wheel bolts | 84 | 232 | 102 | – |
| 1 | Extended Drive 12 inch (305 mm) | ED12TWL | Nose extension, primarily for truck wheel bolts | 84 | 384 | 102 | – |
| 2 | Standard Reaction Arm | RATWL | Standard arm included with PTW and ETW model | 102 | 229 | 146 | 32 |
| 3 | Extended Reaction Arm | ERATWL | Long plate for use with deep well sockets | 102 | 254 | 184 | 64 |
| 4 | Sliding Reaction Arm | SLRATWL | For widely spaced and uneven bolt centers | 152 | 419 | 190 | 114 |
| 5 | Double Straight Arm | DSATWL | Reduces time to reposition arm * | 102 | 508 | 32 | 57 |
| 6 | Straight Reaction Arm | SRATWL | Long plate for wide spaced reaction points | 102 | 305 | 32 | 57 |
| 7 | Blank Reaction Arm ** | BLTWL | Weldable blank for custom applications ** | 102 | 152 | 32 | 57 |

* Time to reposition arm when repeatedly moving from tightening to loosening.

** WARNING: Blank reaction arms must be heat treated to HRc 38-42 prior to use.

Typical PTW and ETW-Series Torque Wrench Applications

Mining

- Track maintenance
- Undercarriage maintenance
- Wheel maintenance
- Shovel maintenance



Power Generation

- Turbine bolts
- Tower segments
- Turbine casings




















Oil & Gas

- Pipe flanges
- Valves
- Manway covers
- Pressure vessels



Optimum Torque Wrench and Pump Combinations

For optimum speed and performance Enerpac recommends the following system set-up with wrench-pump-hose combinations. For other combinations, consult your Enerpac bolting expert or your authorized Enerpac distributor.

| | | ELECTRIC PUMPS | | | | AIR DRIVEN PUMPS |
|---------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| | | PME, PMU-Series | ZU4-Series | TQ-Series | ZE-Series | ZA4-Series |
| | |  |  |  |  |  |
| | | Page: 213 | Page: 216 | Page: 214 | Page: 220 | Page: 222 |
| Speed: |  |  |  |  |  |  |
| Reservoir Capacity: | 1,9 - 3,8 litres | 4,0 - 8,0 litres | 4,0 litres | 4,0 - 40 litres | 4,0 - 8,0 litres | 4,0 - 8,0 litres |
| Duty Cycle: | Standard | Standard | Medium | Heavy-Duty | Heavy-Duty | Heavy-Duty |
| Weight: |  |  |  |  |  |  |
| Field/Factory Work: | Field | Field | Field/Factory | Factory | Field | Field |
| S-Series  186 | S1500X | Optimal | Optimal | Optimal | Optimal | Optimal |
| | S3000X | | | Acceptable | | |
| | S6000X | | | | | |
| | S11000X | | | | | |
| | S25000X | | | | | |
| W-Series  192 | W2000X | Optimal | Optimal | Optimal | Optimal | Optimal |
| | W4000X | | | Acceptable | | |
| | W8000X | | | | | |
| | W15000X | | | | | |
| | W22000X | | | | | |
| W35000X | | | | | | |



ZU4T – Electric Wrench Pumps

Utilizing a universal motor, the ZU4-Series has excellent low voltage characteristics. It works well with long extension cords or generator driven electrical power supplies. A field proven, efficient design ensures this pump is dependable and will draw less current – lowering your operating cost. ZU4-pumps are available in **Pro** and **Classic** formats.

ZU4T Pro pumps have an LCD feature to display torque or pressure, selectable torque wrench, and self-diagnostics – premium features not available on any other pump.

ZU4T Classic pumps feature an analogue gauge and a basic electrical package to deliver durable, safe and efficient hydraulic power.

ZE4T, ZE5T-Series Electric Wrench Pumps

The ZE-Series features premium options, such as the LCD to display torque or pressure values, and self-diagnostics. These pumps utilize an induction motor, making the ZE-Series the coolest and quietest pumps in their class.

ZA4T-Series Air Driven Wrench Pumps

Utilizing the highly efficient design of the Z-Class pumping element, this air driven pump is best suited to power medium to large size torque wrenches.

TQ-700 Series Electric Wrench Pumps

Designed for both portability and production, the TQ-700 features optimized flow technology to deliver superior bolting speed.



Torque Wrench Hoses

Use Enerpac twin safety hoses to connect your torque wrench to the pump.

| For S & W | Modelnr. |
|--------------------|----------|
| 6 m long, 2 hoses | THQ-706T |
| 12 m long, 2 hoses | THQ-712T |
| For SQD & HXD | |
| 6 m long, 2 hoses | THC-7062 |
| 12 m long, 2 hoses | THC-7122 |



Torque Wrench Couplers

For torque wrench couplers see our "System Components" section in this catalogue.

Portable Electric Torque Wrench Pumps

▼ PMU-10422



- Powerful two-speed pump is lightweight and easy to carry
- Standard heat exchanger package on PMU-Series keeps pump cool under extreme use
- Glycerin filled gauge with scales reading in psi and bar
- Transparent overlays in Nm and Ft.lbs for all Enerpac torque wrenches provide a quick torque reference
- Universal motor for a high power-to-weight ratio; generates full pressure on as little as 50% of the rated line voltage
- Adjustable pressure relief valve for accurate torque adjustments and precise repeatability.

PME PMU Series



Reservoir Capacity:

1,9 - 3,8 litres

Flow at Rated Pressure:

0,33 l/min

Motor Size:

0,37 kW

Maximum Operating Pressure:

700 - 800 bar



Torque Wrench Hoses

Use Enerpac twin safety hoses to connect your torque wrench to the pump.

| For 700 bar | Model-Nr. |
|--------------------|-----------|
| 6 m long, 2 hoses | THQ-706T |
| 12 m long, 2 hoses | THQ-712T |
| For 800 bar | |
| 6 m long, 2 hoses | THC-7062 |
| 12 m long, 2 hoses | THC-7122 |



Gauge with Overlay Kit

Available separately for use with PMU-Series pumps:

GT-4015-Q includes gauge and overlays for all S- and W-Series wrenches. **GT-4015** includes gauge and overlays for all SQD and HXD Series wrenches.

GT-4015 includes gauge and overlays for all S- and W-Series wrenches. GT-4015 includes gauge and overlays for all SQD and HXD Series wrenches.

▼ SELECTION CHART

| For Use With Torque Wrenches | | Maximum Pressure Rating (bar) | | Oil Flow Rate (l/min) | | Model Number with Heat Exchanger * | Useable Oil Capacity (litres) | Electric Motor (Volt-phase-Hz) | Dimensions L x W x H (mm) | Weight (kg) |
|------------------------------|------------------|-------------------------------|-----------------------|-----------------------|-----------------------|------------------------------------|-------------------------------|--------------------------------|---------------------------|-------------|
| | | 1 st stage | 2 nd stage | 1 st stage | 2 nd stage | | | | | |
| S1500X S3000X | W2000X W4000X | 48 | 700 | 3,3 | 0,33 | PMU-10427-Q | 1,9 | 115 - 1 - 50/60 | 431x280x381 | 21 |
| | | 48 | 700 | 3,3 | 0,33 | PMU-10447-Q | 3,8 | 115 - 1 - 50/60 | 431x330x381 | 24 |
| | | 48 | 700 | 3,3 | 0,33 | PMU-10422-Q | 1,9 | 230 - 1 - 50/60 | 431x280x381 | 21 |
| | | 48 | 700 | 3,3 | 0,33 | PMU-10442-Q | 3,8 | 230 - 1 - 50/60 | 431x330x381 | 24 |
| SQD-25-I SQD-50-I | HXD-30 HXD-60 | 48 | 800 | 3,3 | 0,33 | PMU-10427 | 1,9 | 115 - 1 - 50/60 | 431x280x381 | 21 |
| | | 48 | 800 | 3,3 | 0,33 | PMU-10447 | 3,8 | 115 - 1 - 50/60 | 431x330x381 | 24 |
| | | 48 | 800 | 3,3 | 0,33 | PMU-10422 | 1,9 | 230 - 1 - 50/60 | 431x280x381 | 21 |
| | | 48 | 800 | 3,3 | 0,33 | PMU-10442 | 3,8 | 230 - 1 - 50/60 | 431x330x381 | 24 |

* For pump without heat exchanger change PMU into PME. Example **PME-10442-Q**.

PME-Series pump size: 250 x 250 x 360 mm. Weight 18 kg (1,9 litres) and 21 kg (3,8 litres).

▼ TQ-700E



- **Optimized flow technology – three stage pump maximizes productivity of the pump and tool while minimizing heat build-up and down time**
- **Heat exchanger is standard included**
- **A quiet (<85 dBA), lightweight pump with a compact footprint – easy to move around and through the work site**
- **Durable roll cage with an ergonomically sized handle and shielded gauge – a pump that is easy to put into position and safe from on site operational hazards**
- **Maintenance made simple with a brushless motor designed for continuous usage**
- **Straightforward operation with a simple pressure set and convenient to use 6 m pendant control – immediate productivity for crews operating the pump**
- **IP55 Rating for Superior Dust and Water Protection**
- **Transparent gauge overlays in Nm and Ft.lbs for all Enerpac S and W-Series torque wrenches provide a quick torque reference.**

Lightweight Torque Wrench Pumps



Four Port Manifold

The TQ-700 offers an optional four wrench manifold as an accessory factory installed. (Add suffix "M" at the end of the model number.

For example: **TQ-700EM**).



Hydraulic Torque Wrenches

Enerpac offers a complete range of square drive and hexagon cassette torque wrenches.

Page: 183



Torque Wrench Hoses

Use Enerpac THQ-700 series twin hoses with 700 bar pumps.

| For 700 bar | Model Nr. |
|-------------------------|-----------------|
| 6 meters long, 2 hoses | THQ-706T |
| 12 meters long, 2 hoses | THQ-712T |



The TQ-700E and the W-Series wrenches are a productive combination in wind applications. ▶

Electric Torque Wrench Pumps




TQ-700 Applications

The TQ-700 Series pump is ideal for powering hydraulic wrenches for the Power Generation and Wind Markets.

Bolting speed is more complex than how much flow per minute the pump produces. The key is optimising the flow rate across the entire bolting cycle. With more oil flowing at the right time and at the right volume, you achieve the optimized flow for a hydraulic bolting system.

The result of this optimized flow is more bolts tightened faster and a more productive work team.

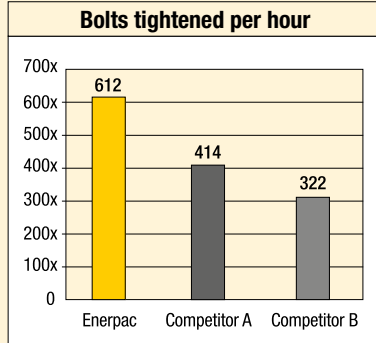

Internal laboratory testing based on standard torquing procedure on a pipe flange with 14, 1 1/2" bolts.

TQ Series



Reservoir Capacity:
4,0 litres

Flow at Rated Pressure:
0,5 l/min

Motor Size:
0,75 kW


Maximum Operating Pressure:
700 bar



Torque Wrench Pump Selection Matrix

For optimum speed and performance see the torque wrench, pump and hose selection matrix.

Page: 212

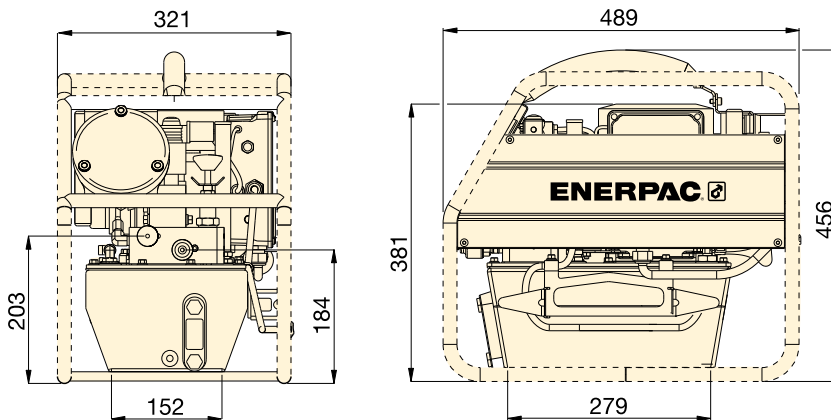

| For Use with Torque Wrenches | Pressure Rating (bar) | Model Number ¹⁾ | Useable Oil Capacity (litres) | Motor Size (kW) | Motor Electrical Specifications (Volt - Ph - Hz) | Sound Level (dBA) | Weight (kg) |
|------------------------------|-----------------------|------------------------------|-------------------------------|-----------------|--------------------------------------------------|-------------------|-------------|
| All S and W-Series | 700 | TQ-700B | 4,0 | 0,75 | 115 - 1 - 50/60 | 82 - 85 | 31 |
| | 700 | TQ-700E ²⁾ | 4,0 | 0,75 | 230 - 1 - 50 | 82 - 85 | 30 |
| | 700 | TQ-700I ³⁾ | 4,0 | 0,75 | 230 - 1 - 60 | 82 - 85 | 30 |

¹⁾ All models meet CE safety requirements and all TÜV requirements.

²⁾ TQ-700E with European plug and CE EMC directive compliant.

³⁾ TQ-700I with NEMA 6-15 plug.

▼ The TQ-700E and the W-Series wrenches are a productive combination.



ZU4T,-Series, Electric Torque Wrench Pumps

ENERPAC 
POWERFUL SOLUTIONS. GLOBAL FORCE.

▼ ZU4204TE-Q (Pro-Series), ZU4204BE-Q (Classic)



Z

Tough,
Dependable
Innovative
CLASS



Classic Electrical

Basic electrical package includes mechanical contactor, ON/OFF toggle switch, pendant with electro-mechanical push buttons, 24V transformer timer and operator accessible circuit breaker.



Pro-Series

Back-lit LCD and Pressure Transducer featuring Auto-Cycle Technology.

- Features Z-Class high-efficiency pump design; higher oil flow and bypass pressure, cooler running and requires 18% less current draw than comparable pumps
- Powerful 1,25 kW universal electric motor provides high power-to-weight ratio and excellent low-voltage operating characteristics
- High-strength, molded composite shroud protects motor and electrical components, while providing an ergonomic, non-conductive handle for easy transport
- Low-voltage pendant provides additional safety for the operator.

Pro Series pump only

- LCD readout provides pressure display and a number of diagnostic and readout capabilities never before offered on a portable electric pump
- AutoCycle feature provides continuous cycle operation of the torque wrench as long as the advance button is pressed (pump can be used with or without auto cycle feature).

- Torque wrench model is selectable
- "Auto cycle" setting easily programmable.
- Digital read-out and "Autocycle" setting
- Pump usage information, hour and cycle counts
- Low-voltage warning and recording
- Self-test and diagnostic capabilities
- Information can be displayed in English, French, German, Italian, Spanish and Portuguese
- Pressure transducer is more accurate and durable than analog gauges
- Easy-viewing variable rate display
- Display pressure in bar, MPa or psi.



◀ Any brand of hydraulic torque wrench can be powered by the portable ZU4-Series torque wrench pump.

ZU4T-Series, Torque Wrench Pumps



Z-Class – A Pump For Every Application

Patented Z-Class pump technology provides high bypass pressures for increased productivity – important in applications using long hose runs and high pressure-drop circuits, like heavy lifting or certain double-acting tools.

Enerpac ZU4T-Series pumps are built to power small to large torque wrenches. Choosing the right ZU4T-Series torque wrench pump for your application is easy.

Classic Electric Torque Wrench Pump

- The Classic has traditional electro-mechanical components (transformers, relays and switches) in place of solid-state electronics. The Classic delivers durable, safe and efficient hydraulic power.

Pro Series Electric Torque Wrench Pump

- Digital (LCD) display features a built-in hour meter, pressure display and shows self-diagnostic, cycle-count and low voltage warning information. These premium features are not available on any other pump – anywhere!
- Auto-Cycle feature provides continuous cycle operation of the torque wrench as long as the advance button is pressed (pump can be used with or without Auto-Cycle feature).

ZU4T Series



Reservoir Capacity:

4,0 - 8,0 litres

Flow at Rated Pressure:

1,0 l/min

Motor Size:

1,25 kW

Maximum Operating Pressure:


700 - 800 bar



Torque Wrench Pump Selection Matrix

For optimum speed and performance see the torque wrench pump and hose selection matrix.

Page: 212

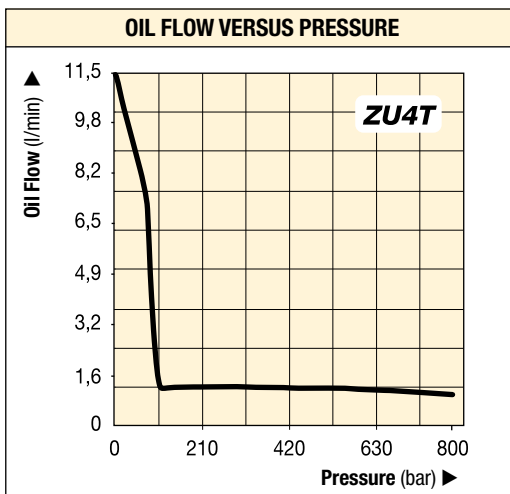

COMMON PUMP MODELS

| | For Use With Torque Wrenches | Model Number ^{1) 4)} | Motor Electrical Specification | Usable Oil Capacity (litres) | Weight (kg) |
|------------|------------------------------|-------------------------------|--------------------------------|------------------------------|-------------|
| Pro Series | All wrenches | ZU4204TB-Q | 115 VAC, 1-ph | 4,0 | 32 |
| | | ZU4208TB-Q | 115 VAC, 1-ph | 8,0 | 34 |
| | | ZU4204TE-Q ²⁾ | 208-240 VAC, 1-ph | 4,0 | 32 |
| | | ZU4208TE-Q ²⁾ | 208-240 VAC, 1-ph | 8,0 | 34 |
| | | ZU4204TI-Q ³⁾ | 208-240 VAC, 1-ph | 4,0 | 32 |
| | | ZU4208TI-Q ³⁾ | 208-240 VAC, 1-ph | 8,0 | 34 |
| Classic | All wrenches | ZU4204BB-QH | 115 VAC, 1-ph | 4,0 | 37 |
| | | ZU4204BB-Q | 115 VAC, 1-ph | 4,0 | 33 |
| | | ZU4208BE-QH ²⁾ | 208-240 VAC, 1-ph | 8,0 | 38 |
| | | ZU4204BE-Q ²⁾ | 208-240 VAC, 1-ph | 4,0 | 34 |
| | | ZU4208BI-QH ³⁾ | 208-240 VAC, 1-ph | 8,0 | 40 |
| | | ZU4208BI-Q ³⁾ | 208-240 VAC, 1-ph | 8,0 | 36 |



Pump Ratings

-Q suffix pumps are for 700 bar torque wrenches, and include spin-on couplers.

-E suffix pumps are for use with 800 bar torque wrenches, and include polarized lock-ring safety couplers.

Page: 219



Overlay Kit with Gauge

Available separately for use with ZU4T-Series Classic: **GT-4015Q** includes gauge and torque overlays for all S- and W-Series

torque wrenches.

GT-4015 includes gauge and overlays for all SQD and HXD torque wrenches.

¹⁾ All models meet CE safety requirements and all CSA requirements.

²⁾ European plug and CE EMC directive compliant

³⁾ With NEMA 6-15 plug

⁴⁾ Select -E suffixed pumps for Enerpac SQD and HXD 800 bar torque wrenches, see page 219.



4-Wrench Manifold

- For simultaneous operation of multiple torque wrenches
- Can be factory installed or ordered separately.

| Accessory Kit * Model Nr. | Can be used on ZU4-Series torque wrench pumps |
|------------------------------|-----------------------------------------------|
| ZTM-E | for 800 bar torque wrenches |
| ZTM-Q | for 700 bar torque wrenches |

* Add suffix **M** for factory installation.

Ordering Example: ZU4208TE-QM



Skid Bar

- Provides greater pump stability on soft or uneven surfaces
- Provides easy two-handed lift.

| Accessory Kit * Model Nr. | Can be used on ZU4-Series torque wrench pumps |
|------------------------------|-----------------------------------------------|
| SBZ-4 | 4 and 8 litres reservoir ¹⁾ |
| SBZ-4L | 4 and 8 litres reservoir ²⁾ |

* Add suffix **K** to pump model number for factory installation.

¹⁾ Without heat exchanger 2,2 kg.

²⁾ With heat exchanger 3,2 kg.

Ordering Example: ZU4208TE-QK



Heat Exchanger

- Removes heat from the bypass oil to provide cooler operation
- Stabilizes oil viscosity, increasing oil life and reduces wear of pump and other hydraulic components.

| Accessory Kit * Model Nr. | Can be used on ZU4-Series torque wrench pumps |
|------------------------------|-----------------------------------------------|
| ZHE-U115 | 115 V pumps |
| ZHE-U230 | 230 V pumps |

* Add suffix **H** to pump model number for factory installation.

Heat Exchanger adds 4,1 kg to pump weight.

Ordering Example: ZU4208TE-QH

▼ Most hydraulic torque wrenches can be powered by the Enerpac ZU4T-Series torque wrench pump.



Roll Cage

- Protects pump
- Provides greater pump stability.

| Accessory Kit * Model Nr. | Can be used on ZU4-Series torque wrench pumps |
|------------------------------|-----------------------------------------------|
| ZRC-04 | 4 and 8 litres reservoir ¹⁾ |
| ZRC-04H | 4 and 8 litres reservoir ²⁾ |

* Add suffix **R** for factory installation.

¹⁾ Without heat exchanger.

²⁾ With heat exchanger.

Ordering Example: ZU4208TE-QR

| Thermal Transfer * | Max. Pressure | Max. Oil Flow | Voltage |
|--------------------|---------------|---------------|---------|
| (Btu/h) | (bar) | (l/min) | (VDC) |
| 900 | 20,7 | 26,5 | 12 |

* At 1,9 l/min at 21 °C ambient temperature. Do not exceed maximum oil flow and pressure ratings. Heat exchanger is not suitable for water-glycol or high water-based fluids.

ZU4T-Series, Ordering Matrix and Specifications

▼ This is how a ZU4T-Series pump model number is built up:



1 Product Type

Z = Pump series

2 Motor Type

U = Universal electric motor

3 Flow Group

4 = 1,0 l/min @ 700 bar

4 Valve Type

2 = Torque wrench valve

5 Reservoir Size (useable oil)

04 = 4 litres

08 = 8 litres

6 Valve Operation

T = **Pro Serie** pump with solenoid valve and pendant, LCD Electric and pressure transducer

B = **Classic pump** with solenoid valve and pendant.

7 Voltage

B = 115V, 1 ph, 50/60 Hz

E = 208-240V, 1 ph, 50/60 Hz (with European plug CE RF compliant)

I = 208-240V, 1 ph, 50/60 Hz (with NEMA 6-15 plug)

8 Options

E = **800 bar couplers** for use with HXD and SQD-Series or other wrenches

Q = **700 bar couplers** for use with S and W-Series or other wrenches

H = Heat exchanger

K = Skid bar

M = 4-wrench manifold

R = Roll cage

ZU4T Series



Reservoir Capacity:

4 - 8 litres

Flow at Rated Pressure:

1,0 l/min

Motor Size:

1,25 kW

Maximum Operating Pressure:

700 - 800 bar




How to order your ZU4T-Series torque wrench pump

Ordering Example : Modelnr. ZU4208TE-QMHK

700 bar Pro Series pump for use with Enerpac S and W-Series and other 700 bar torque wrenches, 230V motor, 8 litres reservoir, 4-wrench manifold, heat exchanger and skidbar.

Refer to the torque wrench pump selection matrix for optimum wrench, pump and hose combinations.

Page: 212

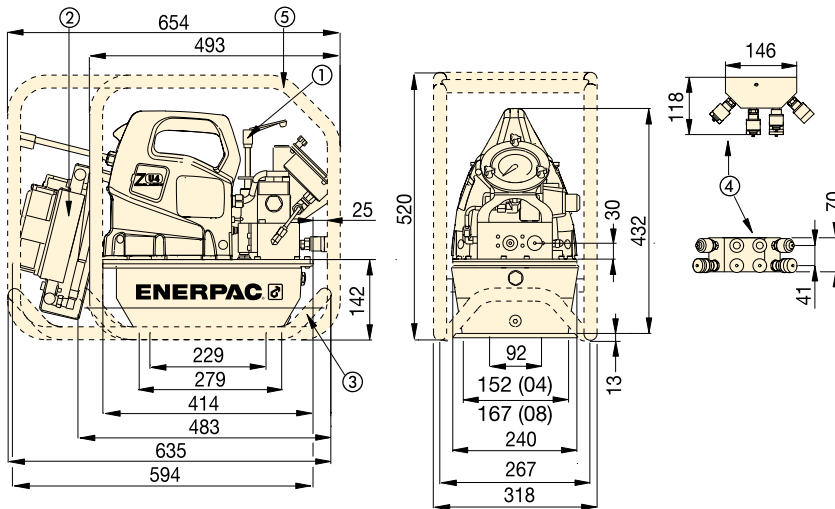

ZU4T-Series Torque Wrench Pumps

- ① User adjustable relief valve
- ② Heat Exchanger (optional)
- ③ Skidbar (optional)
- ④ 4-wrench manifold (optional)
- ⑤ Roll cage (optional)

| ZU4T-Series Performance Chart | | | | | | | | | |
|-------------------------------|--------------------------|--------|---------|---------|----------------------------------------------------|-------------------|-------------------------------------|--|--|
| Motor Size (kW) | Output Flow Rate (l/min) | | | | Motor Electrical Specification (Volt - Phase - Hz) | Sound Level (dBA) | Relief Valve Adjustment Range (bar) | | |
| | 7 bar | 50 bar | 350 bar | 700 bar | | | | | |
| 1,25 | 11,5 | 8,8 | 1,2 | 1,0 | 115 - 1 - 50/60 208-240 - 1 - 50/60 | 85-90 | 124-700 * | | |

* Pump type (-Q) shown, (-E) range is 124-800 bar.



Torque Wrench Hoses

Use Enerpac twin safety hoses to connect your torque wrench to the pump.

| For 700 bar | Model-Nr. |
|--------------------|-----------------|
| 6 m long, 2 hoses | THQ-706T |
| 12 m long, 2 hoses | THQ-712T |
| For 800 bar | |
| 6 m long, 2 hoses | THC-7062 |
| 12 m long, 2 hoses | THC-7122 |

ZE-Series, Electric Torque Wrench Pumps

ENERPAC 
POWERFUL SOLUTIONS. GLOBAL FORCE.

▼ ZE4204TE-QHR



Z Tough,
Dependable
Innovative
CLASS

- Auto-Cycle feature provides continuous cycle operation of the torque wrench as long as the advance button is pressed (pump can be used with or without auto cycle feature)
- LCD readout provides pressure and torque display and a number of diagnostic and readout capabilities never before offered on a portable electric pump
- Totally enclosed, fan-cooled industrial electric motors supply extended life and stand up to harsh industrial environments
- High-strength, molded electrical enclosure protects electronics, power supplies and LCD readout from harsh environments.



Pro-Series

Back-lit LCD and Pressure Transducer featuring Auto-Cycle Technology.


- Torque wrench model is selectable
- "Auto cycle" setting easily programmable.
- Digital read-out and "Autocycle" setting
- Pump usage information, hour and cycle counts
- Low-voltage warning and recording
- Self-test and diagnostic capabilities
- Information can be displayed in English, French, German, Italian, Spanish and Portuguese
- Pressure transducer is more accurate and durable than analog gauges
- Easy-viewing variable rate display
- Display pressure in bar, MPa or psi.



◀ The ZE4T-Series torque wrench pumps are perfectly matched for this W2000X wrench.

Electric Torque Wrench Pumps

ZE4T AND ZE5T-SERIES OIL FLOW VERSUS PRESSURE

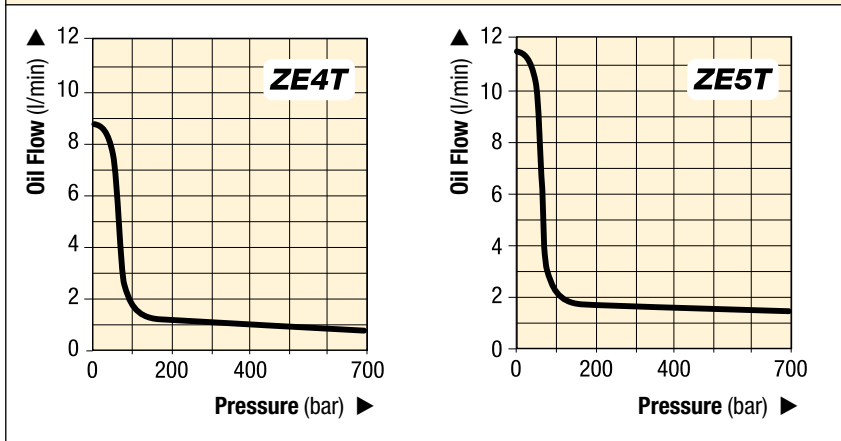

ZE4T ZE5T Series



Reservoir Capacity:

4 - 40 litres

Flow at Rated Pressure:


0,82 - 1,64 l/min

Motor Size:

1,1 - 2,2 kW

Maximum Operating Pressure:

700 bar

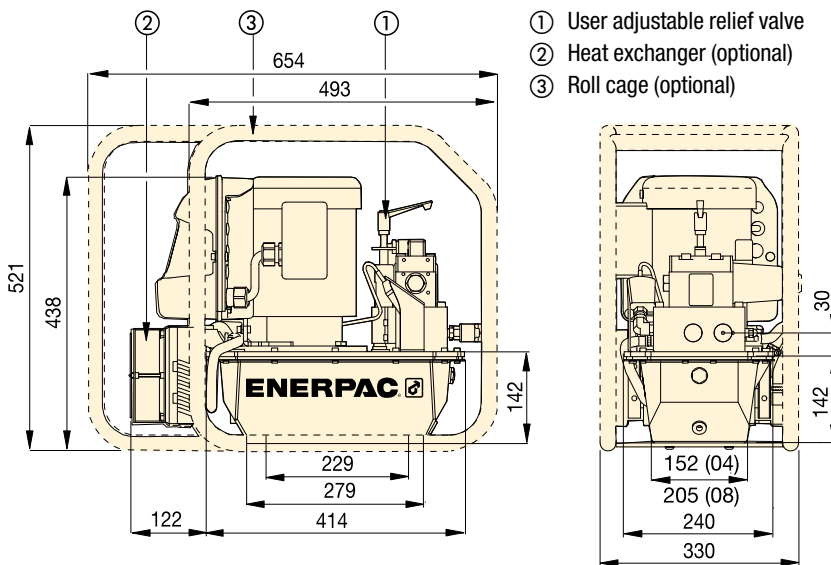

ZE4T and ZE5T-Series, 4 and 8 litres reservoirs

▼ COMMON TORQUE WRENCH PUMP MODELS

| For Use With Torque Wrenches | Max. Operating Pressure (bar) | Model Number with Heat Exchanger and Roll Cage | Motor Electrical Specification (Volt - Ph - Hz) | Usable Oil Capacity ¹⁾ (litres) | Weight (kg) |
|------------------------------|-------------------------------|------------------------------------------------|-------------------------------------------------|--------------------------------------------|-------------|
| all S and W-Series | 700 | ZE4204TB-QHR | 115 - 1 - 50/60 | 4,0 | 61 |
| | 700 | ZE4204TE-QHR | 230 - 1 - 50/60 | 4,0 | 61 |
| | 700 | ZE4204TG-QHR | 230 - 3 - 50/60 | 4,0 | 62 |
| | 700 | ZE5204TW-QHR | 400 - 3 - 50/60 | 4,0 | 62 |

¹⁾ Larger reservoirs (8, 10, 20 and 40 litres) are available. Contact Enerpac.

▼ PERFORMANCE CHART

| Pump Series | Output Flow Rate at 50 Hz ²⁾ (l/min) | | | | Motor Size (kW) | Relief Valve Adjustment Range (bar) | Sound Level (dBA) |
|-------------|-------------------------------------------------|--------|---------|---------|-----------------|-------------------------------------|-------------------|
| | 7 bar | 50 bar | 350 bar | 700 bar | | | |
| ZE4T | 8,8 | 8,1 | 0,9 | 0,8 | 1,1 | 70 - 700 | 75 |
| ZE5T | 11,8 | 11,2 | 1,7 | 1,6 | 2,2 | 70 - 700 | 75 |

²⁾ Flow rate will be approximately 6/5 higher at 60 Hz.



Torque Wrench Pump Selection Matrix

For optimum speed and performance see the torque wrench pump and hose selection matrix.

Page: 212



Torque Wrench Hoses

Use Enerpac twin safety hoses to connect your torque wrench to the pump.

| For 700 bar | Model Nr. |
|--------------------|-----------|
| 6 m long, 2 hoses | THQ-706T |
| 12 m long, 2 hoses | THQ-712T |

▼ ZA4204TX-ER



- Two-speed operation and high by-pass pressure reduces cycle time for improved productivity
- Glycerin filled pressure gauge with transparent overlays in Nm and Ft.lbs for Enerpac torque wrenches provide a quick torque reference
- Standard Regulator-Filter-Lubricator with removable bowls and auto drain
- Heat exchanger warms exhaust air to prevent freezing and cools the oil
- Ergonomic pendant allows remote operation up to 6 m.

Complete 700 bar Pump-Hose Set ZA4208TX-QRU105

- Fine air pressure adjustment for very accurate torque control
- High bypass pressure (200 bar) for faster torque cycles
- Improved wrench performance at low pressure
- Standard with THQ706T twin hose.



Z Tough, Dependable Innovative CLASS



Torque Wrench Hoses

Use Enerpac twin safety hoses to connect your torque wrench to the pump.

| For 700 bar | Model Nr. |
|--------------------|-----------------|
| 6 m long, 2 hoses | THQ-706T |
| 12 m long, 2 hoses | THQ-712T |
| For 800 bar | |
| 6 m long, 2 hoses | THC-7062 |
| 12 m long, 2 hoses | THC-7122 |



Gauge with Overlay Kit

Gauge Overlay Kits are available separately for use with ZA4T-Series pumps:

GT-4015-Q includes gauge and overlays for all S- and W-Series torque wrenches.

GT-4015 includes gauge and overlays for all SQD and HXD torque wrenches.



Torque Wrench Pump Selection Matrix

For optimum speed and performance see the torque wrench pump and hose selection matrix.

Page:  212

◀ Most hydraulic torque wrenches can be powered by the Enerpac ZA4T-Series torque wrench pump.

Air Driven Torque Wrench Pumps



ZA4T-Series Pump Applications

The ZA4T-Series pump is best suited to power medium to large size torque wrenches.

Patent-pending Z-Class technology provides high by-pass pressures for increased productivity.

Its high power to weight ratio and compact design make it ideal for applications which require easy transport of the pump.

All ZA4T-Series pump models meet CE, CSA and TÜV safety requirements. For further application assistance contact your local Enerpac office.

ATEX 95 Certified

The ZA4T-Series pumps are tested and certified according to the Equipment Directive 94 / 9 / EC "ATEX Directive".

The explosion protection is for equipment group II, equipment category 2 (hazardous area zone 1), in gas and/or dust atmospheres. The ZA4T-Series pumps are marked with: **Ex II 2 GD ck T4**.



ZA4T Series



Reservoir Capacity:

4,0 - 8,0 litres

Flow at Rated Pressure:

0,8 - 1,0 l/min

Air Consumption:


600 - 2840 l/min

Maximum Operating Pressure:

700 - 800 bar

OIL FLOW VERSUS PRESSURE

6,9 bar dynamic air pressure at 2840 l/min

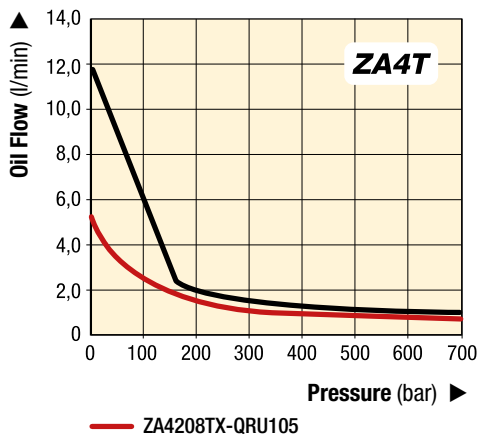

Accessory Options

Available by placing the following additional suffix at the end of the model number:

- K** = Skid bar
- M** = 4-wrench manifold
- R** = Roll cage.

Page: 224

▼ ZA4208TX-QRU105 for improved wrench performance and torque control at low pressure.



COMMON PUMP MODELS

| For Use With Torque Wrenches | Maximum Operating Pressure (bar) | Model Number | Usable Oil Capacity (litres) | Weight (kg) |
|------------------------------|----------------------------------|-------------------|------------------------------|-------------|
| all S and W-Series | 700 | ZA4208TX-QRU105 * | 6,6 | 45 |
| | 700 | ZA4204TX-Q | 2,7 | 42 |
| | 700 | ZA4208TX-Q | 6,6 | 47 |
| | 700 | ZA4204TX-QR | 2,7 | 46 |
| | 700 | ZA4208TX-QR | 6,6 | 51 |
| all SQD and HXD-Series | 800 | ZA4204TX-E | 2,7 | 42 |
| | 800 | ZA4208TX-E | 6,6 | 47 |
| | 800 | ZA4204TX-ER | 2,7 | 46 |
| | 800 | ZA4208TX-ER | 6,6 | 51 |

* Standard with THQ706T hose and fine air pressure adjustment for very accurate torque control.
Pump weight 45 kg, complete set weight 58 kg.



Skid Bar

- Provides greater pump stability on soft or uneven surfaces
- Provides easy two-handed lift.



4-Wrench Manifold

- For simultaneous operation of multiple torque wrenches
- Can be factory installed or ordered separately.



Roll Cage

- Protects pump
- Provides greater pump stability.

| Accessory Kit * Model Nr. | Can be used on ZA4T-Series torque wrench pumps |
|------------------------------|------------------------------------------------|
| SBZ-4 | Reservoir 04 and 08 |

* Add suffix **K** for factory installation.
Weight skid bar 2,2 kg.
Ordering Example: ZA4208TX-QK

| Accessory Kit * Model Nr. | Can be used on ZA4T-Series torque wrench pumps |
|------------------------------|------------------------------------------------|
| ZTM-E | for 800 bar torque wrenches |
| ZTM-Q | for 700 bar torque wrenches |

* Add suffix **M** for factory installation.
Weight manifold 4,5 kg.
Ordering Example: ZA4208TX-QM

| Accessory Kit * Model Nr. | Can be used on ZA4T-Series torque wrench pumps |
|------------------------------|------------------------------------------------|
| ZRC-04 | Reservoir 04 and 08 |

* Add suffix **R** for factory installation.
Roll cage weight 3,4 kg.
Ordering Example: ZA4208TX-QR



700 bar Spin-on Couplers

- Mounted on:
 - Torque wrench pumps with suffix "Q"
 - S and W-Series wrenches
 - THQ-Series hoses
 - 4-Wrench manifold ZTM-Q.



800 bar Lock-ring Couplers

- Mounted on:
 - Torque wrench pumps with suffix "E"
 - HXD and SQD-Series wrenches
 - THC-Series hoses
 - 4-Wrench manifold ZTM-E.



Torque Wrench Hoses

Use Enerpac twin safety hoses to connect your torque wrench to the pump.

| For 700 bar | Model Nr. |
|--------------------|-----------------|
| 6 m long, 2 hoses | THQ-706T |
| 12 m long, 2 hoses | THQ-712T |
| For 800 bar | |
| 6 m long, 2 hoses | THC-7062 |
| 12 m long, 2 hoses | THC-7122 |



Torque Wrench Couplers

For Enerpac torque wrench couplers see our "System Components" section in this catalogue.

Ordering Matrix and Specifications

▼ This is how a ZA4T-Series pump model number is built up:

| | | | | | | | | | | |
|----------------------|--------------------|--------------------|--------------------|------------------------|-------------------------|--------------|----------|------------------------|--------------|--------------|
| Z | A | 4 | 2 | 08 | T | X | - | Q | M | R |
| 1 Product Type | 2 Motor Type | 3 Flow Group | 4 Valve Type | 5 Reservoir Size | 6 Valve Operation | 7 Voltage | | 8 Must be E or Q | 8 Options | 8 Options |

1 Product Type

Z = Pump series

2 Motor Type

A = Air motor

3 Flow Group

4 = 1,0 l/min @ 700 bar

4 Valve Type

2 = Torque Wrench Valve

5 Reservoir Size

(useable capacity)

04 = 2,7 litres

08 = 6,6 litres

6 Valve Operation

T = Air operated valve with pendant

7 Voltage

X = Not applicable

8 Options

E = 800 bar couplers for use with HXD and SQD-Series or other wrenches

Q = 700 bar couplers for use with S and W-Series or other wrenches

K = Skid bar

M = 4-wrench manifold

R = Roll cage

ZA4T Series



Reservoir Capacity:

4 - 8 litres

Flow at Rated Pressure:

0,8 - 1,0 l/min

Air Consumption:

600 - 2840 l/min

Maximum Operating Pressure:

700 - 800 bar




How to order your ZA4T-Series torque wrench pump

Model No. ZA4208TX-QMR

700 bar pump for use with Enerpac S- and W-Series and other 700 bar torque wrenches, 8 litres reservoir, 4-wrench manifold, and roll cage.

Refer to the torque wrench pump selection matrix for optimum wrench, pump and hose combinations.

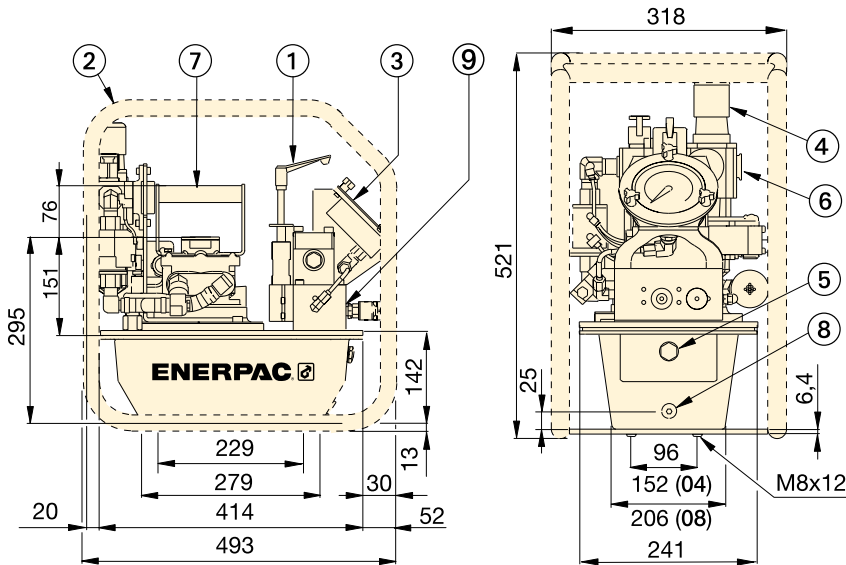

- ① User adjustable relief valve
- ② Roll Cage (optional)
- ③ Gauge with overlays
- ④ Filter/lubricator/regulator
- ⑤ Oil level sight gauge

- ⑥ Air input 1/2" NPTF
- ⑦ Standard handle
- ⑧ Oil drain
- ⑨ 1/4"-18 NPTF Oil outlet


| ZA4T-Series Performance | | | | | Dynamic Air Pressure Range (bar) | Air Consumption (l/min) | Sound Level (dBA) | Relief Valve Adjustment Range (bar) |
|--------------------------|--------|---------|---------|-----------|----------------------------------|-------------------------|-------------------|-------------------------------------|
| Output Flow Rate (l/min) | | | | | | | | |
| 7 bar | 50 bar | 350 bar | 700 bar | | | | | |
| 11,5 | 8,8 | 1,2 | 1,0 | 4,0 - 6,9 | 600 - 2840 | 85-90 | 124-700 * | |
| 5,4 ** | 4,8 ** | 1,1 ** | 0,8 ** | 7,0 ** | | | | |

* Pump type (-Q) shown, (-E) range is 124-800 bar.

** ZA4208TX-QRU105 only.

www.enerpac.com

▼ Most hydraulic torque wrenches can be powered by the Enerpac ZA4T-Series torque wrench pump.

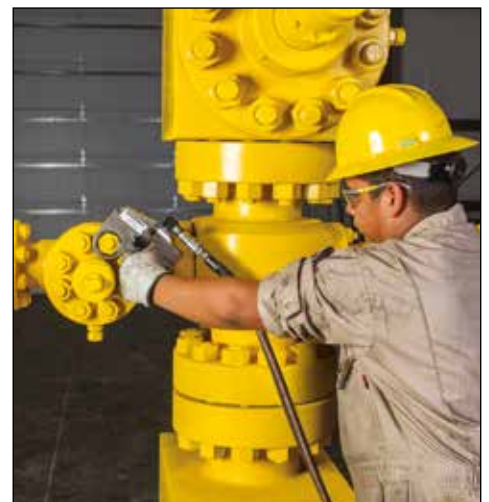

▼ ZUTP-1500E



- Two-stage pump design provides high flow at low pressure for fast system fills and controlled flow at high pressure for safe and accurate operation
- Z-Class high-efficiency pump design runs cooler and requires less current draw which is especially helpful in remote locations
- 6 m pendant cord enables motor control from a distance
- Angled 153 mm pressure gauge, with polycarbonate cover, built into a protective metal shroud for improved visibility and protection
- Safety relief valve limits output pressure
- Compact, lightweight and rugged aluminium frame for increased durability and ease of handling.



◀ *The ZUTP-1500 pump is rugged, lightweight, compact for tight openings, and delivers hassle-free operation of bolt tensioning in remote locations with up to two times the speed of competitive pumps.*

Reliability, Power and Precision



Applications

The Enerpac ZUTP-Series electric pump is ideally suited for use with hydraulic bolt tensioning tools and hydraulic nuts. See our Bolting Tools catalogue and website.



Ultra-high pressure

This pump operates at ultra-high pressure, use only the specified fittings and hoses designed for these pressures.


Page: 227



Bolting Integrity Software

Visit www.enerpac.com to access our free on-line bolting software application and obtain information on tool selection, bolt load calculations and tool pressure settings. A combined application data sheet and joint completion report is also available.

Electric Tensioning Pumps

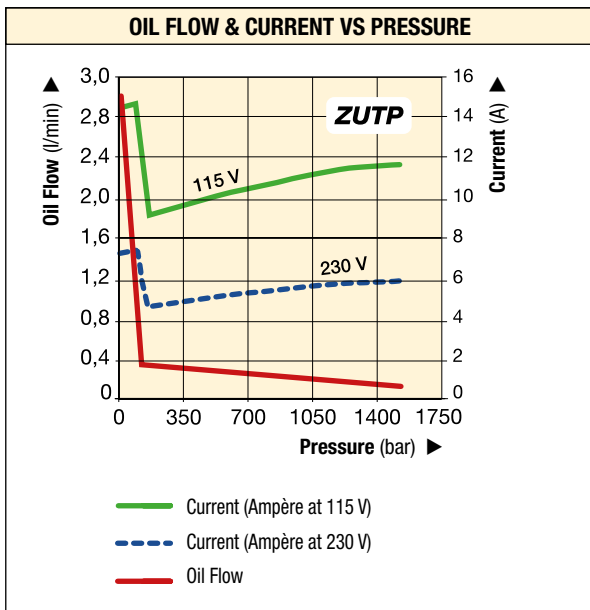

ZUTP Series



Reservoir Capacity:

4,0 litres

Flow at Rated Pressure:


0,13 l/min

Motor Size:

1,25 kW

Maximum Operating Pressure:

1500 bar

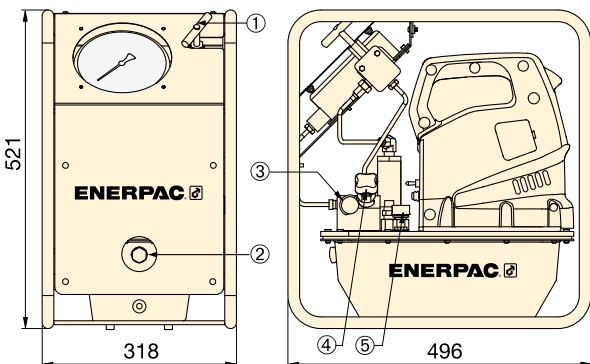

- ① Release Valve
- ② Sight Glass
- ③ Out Port 1/4" BSPM and BR-150 female coupler
- ④ User Adjustable Relief Valve
- ⑤ Breather

1500 bar HIGH PRESSURE PUMP

| Pump Type | Useable Oil Capacity (litres) | Model Number ¹⁾ | Pressure Rating (bar) | Output Flow Rate at 0 bar (l/min) | Output Flow Rate at 1500 bar (l/min) | Motor Electrical Specification | Motor Size (kW) | Sound Level (dBA) | Weight (kg) |
|-----------|-------------------------------|----------------------------------|-----------------------|-----------------------------------|--------------------------------------|--------------------------------|-----------------|-------------------|-------------|
| Two speed | 4,0 | ZUTP-1500 B | 1500 | 2,90 | 0,13 | 115 VAC, 1-ph | 1,25 | 89 | 29,5 |
| | 4,0 | ZUTP-1500 E ²⁾ | 1500 | 2,90 | 0,13 | 230 VAC, 1-ph ²⁾ | 1,25 | 89 | 29,5 |
| | 4,0 | ZUTP-1500 I ³⁾ | 1500 | 2,90 | 0,13 | 230 VAC, 1-ph ³⁾ | 1,25 | 89 | 29,5 |

¹⁾ All models meet CE safety requirements and all TÜV requirements.

²⁾ European plug and CE EMC directive compliant.

³⁾ With NEMA 6-15 plug.

1500 bar HOSES

| Model Number | Hose End 1 | Hose End 2 | Length (m) |
|--------------|---------------------|---------------------|------------|
| HT-1503 | 1/4" BSPM 120° Cone | 1/4" BSPM 120° Cone | 1,0 |
| HT-1510 | 1/4" BSPM 120° Cone | 1/4" BSPM 120° Cone | 3,0 |
| HT-1503HR* | BH-150 | BR-150 | 1,0 |
| HT-1510HR* | BH-150 | BR-150 | 3,0 |

* Includes dust caps.

1500 bar COUPLERS

| Description | Complete Set | Female Half | Male Half |
|-------------------------------------------|--------------|-------------|-----------|
| Quick Disconnect Coupler* | B-150 | BR-150 | BH-150 |
| Quick Disconnect Coupler and Adaptor Kit* | BW-150AW | - | - |
| Quick Disconnect Blanking Coupler Set* | B-150B | - | - |


* Includes dust caps.

ATP-Series, Ultra-High Pressure Air Pump

▼ ATP-1500



- General purpose, high pressure air driven two speed pump unit for products requiring up to 1500 bar hydraulic pressure
- Compact, lightweight, rugged steel frame for protection and easy handling
- Prelubricated pump element, does not require an airline lubricator
- Easily adjustable output pressure control
- Integrated and protected easy to read glycerin filled gauge
- Safety relief valve limits output pressure.

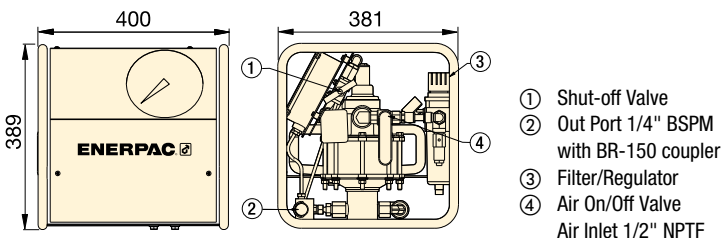

ATP Series

Reservoir Capacity:
3,8 litres

Flow at Rated Pressure:
0,07 l/min

Maximum Operating Pressure:
1500 bar



This pump operates at ultra-high pressure, use only the specified fittings and hoses designed for these pressures.

Page: 227



Applications


The ATP-pump is ideally suited for use with GT-Series hydraulic bolt tensing tools and hydraulic nuts. See our Bolting Tools

catalogue or enerpac.com




ATEX Certified

The ATP-Pump is tested and certified according ATEX.


 II 2 GD ck T4

Page: 263

OIL FLOW VERSUS PRESSURE

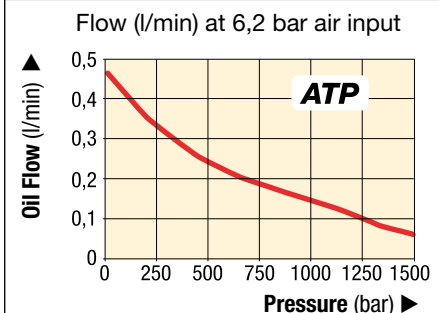

1500 bar HIGH PRESSURE AIR PUMP


| Pump Type | Useable Oil Capacity (litres) | Pressure Rating (bar) | Model Number | Output Flow Rate at 0 bar (l/min) | Output Flow Rate at 1500 bar (l/min) | Air Pressure Range (bar) | Air Consumption (l/min) | Sound Level (dBA) |  (kg) |
|-----------|-------------------------------|-----------------------|-----------------|-----------------------------------|--------------------------------------|--------------------------|-------------------------|-------------------|--------------------------------------------------------------------------------------------|
| Two speed | 3,8 | 1500 | ATP-1500 | 0,43 | 0,07 | 5,5 - 6,2 | 594 | 70 | 32 |

Single-Acting Hydraulic Nut Splitters

▼ Shown from left to right: NC-3241, NC-1319, NC-1924



- Compact and ergonomic design, easy to use
- Unique angled head design
- Two blade design (NC-D models) for time saving operation – nuts are split from two sides in one action
- Single-acting, spring return cylinder
- Heavy duty chisels can be reground
- Nut Splitters include spare chisel, spare set screw and wrench used to secure the chisel. A CR-400 coupler is standard.

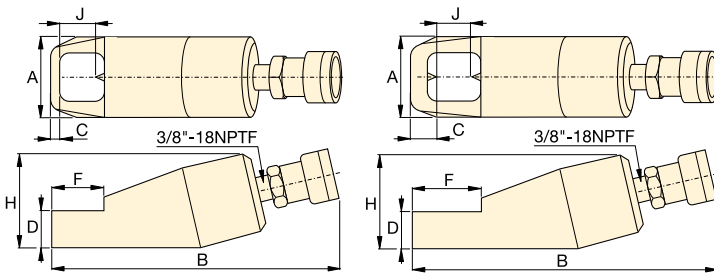

Single Blade Models (NC)

Double Blade Models (NC-D)

NC, STN Series



Capacity:


49 - 882 kN (5-90 ton)

Bolt Range:

M6 - M48

Maximum Operating Pressure:

700 bar






Tool-Pump Sets

Hydraulic Nut Splitters are available as sets (pump, tool, gauge, gauge adaptor, couplers and hose) for your ordering convenience.

| Nut Splitter Model Nr. | Hand Pump Model Nr. | Set Model Nr |
|------------------------|---------------------|--------------|
| NC-1924 | P-392 | STN-1924H |
| NC-2432 | P-392 | STN-2432H |
| NC-3241 | P-392 | STN-3241H |

| For Nut Splitter Model Nr. | Replacement Chisel Model Numbers | |
|----------------------------|----------------------------------|------------------|
| | Moving | Static |
| NC-1319 | NCB-1319 | - |
| NC-1924 | NCB-1924 | - |
| NC-2432 | NCB-2432 | - |
| NC-3241 | NCB-3241 | - |
| NC-4150 | NCB-4150 | - |
| NC-5060 | NCB-5060 | - |
| NC-6075 | NCB-6075 | - |
| NC-1924D | NCB-1924 | NCB-1924D |
| NC-2432D | NCB-2432 | NCB-2432D |
| NC-3241D | NCB-3241 | NCB-3241D |

| | Bolt Range (mm) | Hexagon Nut Range (mm) | Capacity ton (kN) | Oil Capacity (cm ³) | Model Number | Dimensions (mm) | | | | | | |  (kg) |
|-------------------------------------------------------------------------------------|--------------------|---------------------------|----------------------|------------------------------------|------------------|-----------------|-----|----|----|-----|-----|----|-----------------------------------------------------------------------------------------------|
| | | | | | | A | B | C | D | F | H | J | |
|  | M6 - M12 | 10 - 19 | 5 (49) | 15 | NC-1319 | 40 | 170 | 7 | 19 | 28 | 48 | 21 | 1,2 |
| | M12 - M16 | 19 - 24 | 10 (98) | 20 | NC-1924 * | 54 | 191 | 10 | 26 | 40 | 62 | 25 | 2,0 |
| | M16 - M22 | 24 - 32 | 15 (147) | 60 | NC-2432 * | 64 | 222 | 13 | 29 | 51 | 72 | 33 | 3,0 |
| | M22 - M27 | 32 - 41 | 20 (196) | 80 | NC-3241 * | 75 | 244 | 17 | 36 | 66 | 88 | 43 | 4,4 |
| | M27 - M33 | 41 - 50 | 35 (343) | 155 | NC-4150 | 94 | 288 | 21 | 45 | 74 | 105 | 54 | 8,2 |
| | M33 - M39 | 50 - 60 | 50 (490) | 240 | NC-5060 | 106 | 318 | 23 | 54 | 90 | 128 | 60 | 11,8 |
| | M39 - M48 | 60 - 75 | 90 (882) | 492 | NC-6075 | 156 | 393 | 26 | 72 | 110 | 181 | 80 | 34,1 |
|  | M12 - M16 | 19 - 24 | 10 (98) | 20 | NC-1924D | 54 | 168 | 22 | 25 | 50 | 66 | 26 | 3,8 |
| | M16 - M22 | 24 - 32 | 15 (147) | 60 | NC-2432D | 64 | 275 | 25 | 31 | 65 | 78 | 33 | 5,4 |
| | M22 - M27 | 32 - 41 | 20 (196) | 80 | NC-3241D | 77 | 305 | 31 | 37 | 80 | 90 | 43 | 7,2 |

Ordering Notes: Maximum allowable hardness to split is HRc-44. Not to be used on square nuts or stainless steel.

* Available as Tool-Pump Set, see note on this page.

▼ Shown: NS-Series Hydraulic Nut Splitters



- Specially designed to suit standard ANSI B16.5 / BS1560 flanges
- Single-acting (spring return) cylinder
- Tri-blade technology provides three cutting surfaces on a single blade
- Interchangeable heads provide maximum nut range flexibility
- Preset scale allows controlled blade extension, which avoids damage to bolt threads
- Grip tape and handle included for more secure manoeuvrability
- Nickel-plated cylinder body for excellent corrosion protection and improved durability in harsh environments
- Internal Pressure Relief Valve for overload protection
- CR-400 coupler and dustcap included on all models.



◀ Heavily corroded and weathered nuts are quickly split and removed using a NS-Series Nut Splitter.

Power and Precision High Performance Nut Splitter



Blade Cutting Depth Scale

Adjustable cutting depth scale for controlled blade extension, which avoids damage to bolt threads. The scale indicates the bolt range in metric and imperial values on each cutting head.



NC-Series, Hydraulic Nut Cutters

The NC-Series models are available featuring an angle-head design for 10 - 75 mm hexagon nuts.

Page: 229



Joint Separation Tools

FS and FSH-Series parallel wedge spreaders provide quick and easy joint separation using hydraulic or mechanical force.

Page: 232



Flange Alignment Tools

The ATM-Series provide safe and high-precision flange alignment tools that fit most commonly used ANSI, API, BS and DIN flanges.

Page: 234

Hydraulic Nut Splitters



Nut Splitter Sets

To provide maximum flexibility, NS-Series Nut Splitters can also be ordered in sets (NS-xxxSy). Select Nut Splitter size and pump style from the chart below. To order additional Cutting Heads (NSH-xxxxxx), Cylinders (NSC-xxx) or Replacement Blades (NSB-xxx), see Selection Chart below.

SET SELECTION:

- 1 Select your Nut Splitter
- 2 Select your pump type

NS Series



Capacity:

917 - 1711 kN

Hexagon Nut Size:

70 - 130 mm

Bolt Range:

M45 - M90

Maximum Operating Pressure:

700 bar

TOOL-PUMP SET SELECTION CHART

| Nut Splitter Model Nr. | Tool-Pump Set Model Nr. | Pump Selection | | | | Accessories Included | | | |
|------------------------|----------------------------|---------------------|----------------------|--------------------------------|--------------------------------|--------------------------|-------------------------|--------------------------|------------------------|
| | | Hand Pump Model Nr. | Air Pump Model Nr. | Cordless Pump (230V) Model Nr. | Electric Pump (230V) Model Nr. | Pressure Gauge Model Nr. | Gauge Adaptor Model Nr. | Hydraulic Hose Model Nr. | Storage Case Model Nr. |
| NS-70105 | NS-70105SH | P-392 | - | - | - | GP-10S | GA-2 | HC-7206 | CM-4 |
| | NS-70105SA | - | XA-11G ²⁾ | - | - | ²⁾ | - | HC-7206 | CM-4 |
| | NS-70105SCE ¹⁾ | - | - | XC-1202ME | - | GA45GC ³⁾ | | HC-7206 | CM-4 |
| | NS-70105SEE ¹⁾ | - | - | - | PUD-1100E | GP-10S | GA-2 | HC-7206 | CM-7 |
| NS-110130 | NS-110130SH | P-802 | - | - | - | GP-10S | GA-2 | HC-7206 | CM-4 |
| | NS-110130SA | - | XA-11G ²⁾ | - | - | ²⁾ | - | HC-7206 | CM-4 |
| | NS-110130SCE ¹⁾ | - | - | XC-1202ME | - | GA45GC ³⁾ | | HC-7206 | CM-4 |
| | NS-110130SEE ¹⁾ | - | - | - | PUD-1100E | GP-10S | GA-2 | HC-7206 | CM-7 |


¹⁾ For set with 115 Volt pump application replace last suffix "E" with "B" in model number.

Example : **NS-70105SCB** (set with XC-cordless pump, 115V);

Example: **NS-110130SEB** (set with PU-Series electric pump, 115 V)

²⁾ XA-11G air pump features an integrated pressure gauge.

³⁾ See page 134 for GA45GC details.

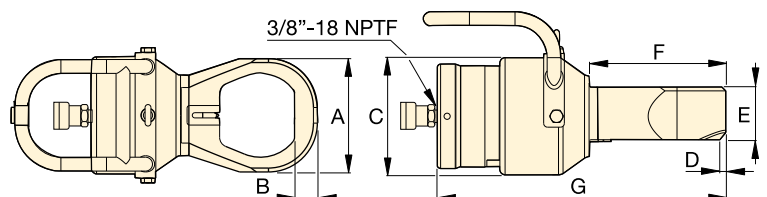

NUT SPLITTER SPECIFICATIONS

| Bolt Range | Hexagon Nut Range ¹⁾ | Capacity | Oil Capacity | Model Number ²⁾ | Dimensions (mm) | | | | | | | Cylinder ³⁾ | Cutting Head ³⁾ | Replacement Blade | |
|------------------|---------------------------------|-------------------|--------------------|----------------------------|-----------------|----|-----|-----|-----|-----|-----|------------------------|----------------------------|-------------------|---------|
| | | | | | A | B | C | D | E | F | G | | | | |
| (mm) | (mm) | ton (kN) | (cm ³) | | | | | | | | | (kg) | | | |
| M45 - M52 | 70 - 80 | 103 (917) | 377 | NS-7080 | 132 | 28 | 180 | 8,0 | 81 | 186 | 412 | 37,0 | NSC-70 | NSH-7080 | NSB-70 |
| M45 - M56 | 70 - 85 | 103 (917) | 377 | NS-7085 | 145 | 30 | 180 | 8,0 | 81 | 196 | 422 | 37,0 | NSC-70 | NSH-7085 | NSB-70 |
| M45 - M64 | 70 - 95 | 103 (917) | 377 | NS-7095 | 160 | 32 | 180 | 8,0 | 81 | 201 | 432 | 38,5 | NSC-70 | NSH-7095 | NSB-70 |
| M45 - M72 | 70 - 105 | 103 (917) | 377 | NS-70105 | 174 | 35 | 180 | 9,0 | 81 | 209 | 443 | 39,5 | NSC-70 | NSH-70105 | NSB-70 |
| M76 - M80 | 110 - 115 | 193 (1711) | 819 | NS-110115 | 189 | 36 | 234 | 3,7 | 111 | 234 | 472 | 69,0 | NSC-110 | NSH-110115 | NSB-110 |
| M76 - M90 | 110 - 130 | 193 (1711) | 819 | NS-110130 | 219 | 41 | 234 | 2,5 | 111 | 242 | 493 | 71,5 | NSC-110 | NSH-110130 | NSB-110 |

¹⁾ Maximum allowable hardness to split is HRC-44. See page 275 for hexagon bolt and nut sizes and related thread diameters.

²⁾ NS-Series Nut Splitters ship in two cases: One containing the NSC-Cylinder and one containing the NSH-Cutting Head. Assembly required.


³⁾ Both, the NSH-head and the NSC-cylinder include a cutting blade.


FS-Series, Hydraulic Flange Spreaders

▼ FS-56



- Lightweight, ergonomic design for ease of use
- Adjustable jaw widths from 70 mm to 216 mm for a wide range of applications
- Single-acting, spring return RC-Series DUO cylinders for fast trouble-free operation.

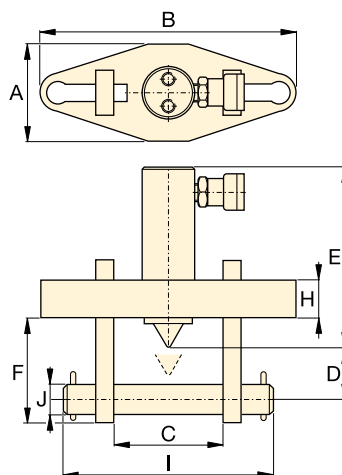

| Maximum Flange Thickness (mm) | Stud Size (mm) | Standard Wedge (mm) | Capacity (ton) | Stroke (mm) | Oil Capacity (cm ³) | Model Number | Dimensions (mm) | | | | | | | | | |  (kg) |
|-------------------------------|----------------|---------------------|----------------|-------------|---------------------------------|--------------|-----------------|------|-----|-----|----|-----|-----|----|-----|----|--------------------------------------------------------------------------------------------|
| | | | | | | | C | | D | E | F | H | I | J | | | |
| | | | | | | | Min. | Max. | | | | | | | | | |
| 2 x 57 | 19 - 28 | 3 - 28 | 5 | 38 | 24,6 | FS-56* | 76 | 209 | 70 | 155 | 32 | 196 | 88 | 25 | 206 | 19 | 11,5 |
| 2 x 92 | 31 - 41 | 3 - 28 | 10 | 54 | 78,7 | FS-109* | 108 | 279 | 104 | 216 | 50 | 152 | 114 | 38 | 273 | 31 | 18,1 |

* Available as Tool-Pump Set, see note on this page.


FS, STF Series



Capacity:
5 and 10 ton

Spread:
70 - 216 mm

Maximum Operating Pressure:
700 bar



Tool-Pump Sets

Both Flange Spreaders are available as sets (pump, tool, gauge, gauge adaptor, couplers and hose) for your ordering convenience.

| Spreader Model Nr. | Pump Model Nr. | Set Model Number |
|--------------------|----------------|------------------|
| FS-56 | P-392 | STF-56H |
| FS-109 | P-392 | STF-109H |
| FS-109 | PATG-1102N | STF-109A |



Wedge Spreaders

Friction-free, smooth and parallel wedge movement with unique interlock wedge design. Eliminates flange damage and risk of spreading arm failure.

Page: 233

Flange Spreader Matching Chart

| ASA Rating (bar) | Pipe Size (mm) | |
|------------------|----------------|------------|
| | FS-56 | FS-109 |
| 10 | 127 - 508 | 558 - 1066 |
| 20 | 63 - 355 | 406 - 711 |
| 27 | 63 - 304 | 355 - 609 |
| 35 | 63 - 254 | 304 - 508 |
| 62 | 12 - 152 | 203 - 406 |
| 103 | 12 - 88 | 101 - 203 |
| 172 | 12 - 63 | 76 - 101 |

Hydraulic and Mechanical Wedge Spreaders

▼ FSH-14 and FSM-8 with safety blocks SB-1



- **Integrated wedge concept:** Friction-free, smooth and parallel wedge movement eliminates flange damage and spreading arm failure
- **Unique interlocking wedge design** - no first step bending and risk of slipping out of joint
- **Requires very small access gap of only 6 mm**
- **Stepped spreader arm design** - each step can spread under full load
- **Few moving parts mean durability and low maintenance**
- **Safety block SB-1 and ratchet spanner SW-22 included with FSM-8 mechanical wedge spreader**
- **Safety block SB-1 and Enerpac RC-102 single-acting cylinder included with FSH-14 hydraulic wedge spreader.**

FSH, FSM, STF Series

Tip Clearance / Maximum Spread ¹⁾:

6 mm / 80 mm

Maximum Spread Force:

8 - 14 ton

Maximum Operating Pressure:

700 bar (FSH-14)



Stepped Blocks FSB-1


Use stepped blocks to increase wedge opening up to 80 mm. Fits both FSH-14 and FSM-8.



AM-Series Control Manifolds

For simultaneously and even spreading of flange joints, 180° apart with FSH-14.


Page: 126



Tool-Pump Sets

The hydraulic flange spreader is available as set (pump, tool, gauge, gauge adaptor, couplers and hose) for your ordering convenience.

| Spreader Model Nr. | Handpump Model Nr. | Set Model Number |
|--------------------|--------------------|------------------|
| FSH-14 | P-392 | STF-14H |

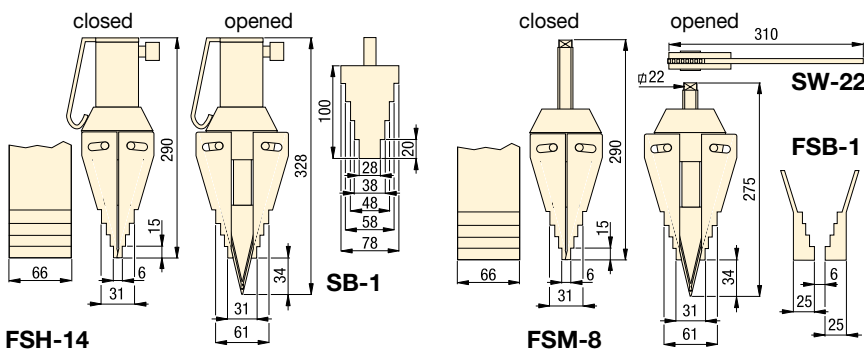

| Maximum Spreading Force ton (kN) | Model Number | Tip Clearance (mm) | Maximum Spread ¹⁾ (mm) | Spreader Type | Oil Capacity (cm ³) | Weight (kg) |
|----------------------------------|--------------|--------------------|-----------------------------------|---------------|---------------------------------|-------------|
| 14 (125) | FSH-14* | 6 | 80 | Hydraulic | 78 | 7,1 |
| 8 (72) | FSM-8 | 6 | 80 | Mechanical | - | 6,5 |

¹⁾ Using stepped blocks FSB-1

* Available as pump-tool set, see note on this page.

▼ Flange maintenance and joint separation with FSH-14 Hydraulic Wedge Spreader.



ATM-Series, Flange Alignment Tools

▼ From left to right: ATM-4, ATM-9, ATM-2 (ATM-9 shown without pump and hose)



- Enerpac ATM-Series tools rectify twist and rotational misalignment quickly, safely and without the need for an external power source
- Appropriate for use on most ANSI, API, BS and DIN flanges
- Reduces set-up time: no need for chains, pulleys or rigs
- Safety strap helps provide secure operation
- Can be installed and used in any position
- Stays stable in position under full load
- Portable, lightweight design enables easy transport and use, even in remote locations
- Each ATM-model contains a tool and kit box.

▼ The compact ATM-2 is actuated by simply hand turning the crank.



The faster, simpler and safer way to align flanges.



Adjustable Reach

The highly adjustable reach of the wing and drop leg on ATM-4 and ATM-9 allow precise alignment.



Gauge and Adaptor

The ATM-9 includes P-142 hand pump and HC-7206C 1,8 m long hose. Enerpac recommend the use of the pressure gauge **GP-10S** and gauge adaptor **GA-4** for easy mounting of the gauge onto your system or use **GA45GC** Gauge Adaptor Assembly.

Page: 128

▼ The ATM-9 is shown here with optional pressure gauge and gauge adaptor.







Applications


Enerpac ATM-Series Tools help correct flange misalignment, and allow bolts to be placed into joints. This alignment takes place during pipework construction, or maintenance.

These tools provide pipe installers and maintenance personnel with some of the simplest, safest and most productive solutions available for flange alignment in the market today.


- ① Extendable wing provides usage on wide variety of flanges.
- ② Portable, light weight design enables easy transport and use.
- ③ Hand-adjustable base for easy positioning by a single operator.
- ④ Safety strap helps provide secure operation from a horizontal or vertical position.

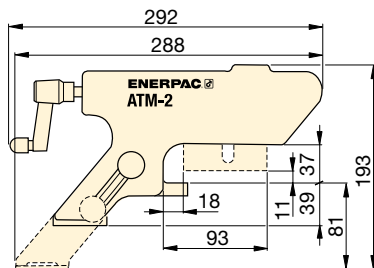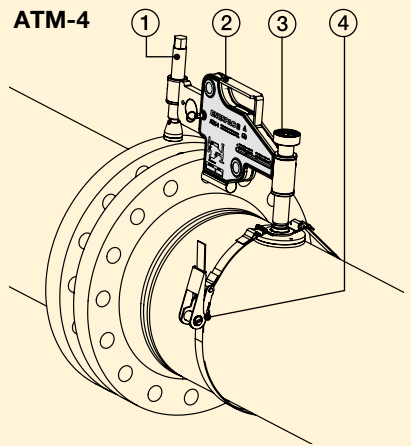

ATM-2

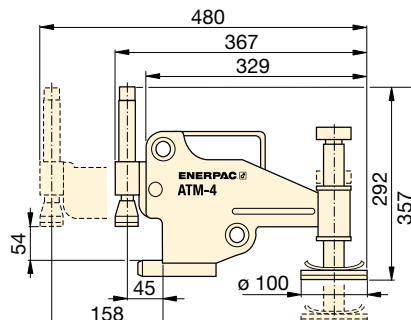

ATM-4

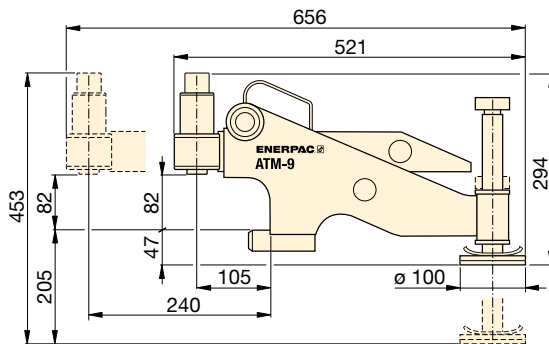

ATM-9

| Maximum Lifting Force | | Model Number | Minimum Bolt Size | | Flange Wall Thickness | | Weight (kg) |
|-----------------------|------|--------------|-------------------|--------|-----------------------|-------------|-------------|
| (ton) | (kN) | | (mm) | (inch) | (mm) | (inch) | |
| 1 | 10 | ATM-2 | 16 | .63 | 14 - 82 | .55 - 3.29 | 1,6 |
| 4 | 40 | ATM-4 | 24 | .95 | 30 - 133 | 1.18 - 5.23 | 8,6 |
| 9 | 90 | ATM-9 * | 31,5 | 1.24 | 93 - 228 | 3.66 - 9.00 | 14,5 |

* ATM-9 includes an Enerpac hand pump and hydraulic hose (gauge and adaptor sold separately). ATM-9 weight includes tool only.

ATM Series



Minimum Bolt Size:

16 - 31,5 mm

Flange Wall Thickness:

14 - 228 mm

Maximum Lifting Force:

1 - 9 ton (10 - 90 kN)



Cylinder-Pump Sets

Hydraulic cylinders, jacks and lifting wedges can also be used to assist in pipe line positioning and aligning.

Page: 58



Pipe Flange Face Tool

The portable, hand powered tool FF-120 makes even the hardest to reach pipe flanges resurfaceable in a safe and convenient way.

Page: 236

▼ The ATM-Series – the faster, simpler and safer way to align flanges.



▼ FF-120



Safe, efficient and accurate refacing of flat pipe flange surfaces

- Makes refacing easy – hand operated machine tool can be set up anywhere without the need for air, electric or hydraulic power
- Lightweight and portable (15 kg in storage box)
- Adjustable cutting head for reface of flat flange surfaces of pipes with flange outside diameter facing range 25,4 - 304,8 mm [1 - 12 inch]
- Interchangeable collets for ID mounting range 25,4 - 152,4 mm [1-6 inch] allow the user to work on many different flanges with minimal time between set-ups
- Interchangeable lead screws suitable for refacing damaged raised-face (RF), flat-face (FF) or lens-ring joint flanges
- Tool body with expanding collets centers itself providing real concentric operation.

▼ The Enerpac FF-120 used to face a pipe flange.



Complete in Wheeled Carrying Case

The FF-120 comes as portable set (15 kg). Can be transported, easy set-up and operated by a single

technician. Set includes:

FFL-kit with locators, O-Rings and extensions;
FSS-kit with feed screw and nut ½"-20 UN for surface roughness Ra 1,6 - 2,4 μ.

FSF-kit with feed screw and nut ½"-11 UNF for surface roughness Ra 3,2 - 6,3 μ.



Joint Separation Tools

FS and FSH-Series parallel wedge spreaders provide quick and easy joint separation using hydraulic or mechanical force.

Page: 232



Flange Alignment Tools

The ATM-Series provide safe and high-precision flange alignment tools that fit most commonly used ANSI, API, BS and DIN flanges.

Page: 234



Controlled Tightening and Loosening

Use Enerpac Bolting Tools to seal the joint to the precise torque or tension required: torque

multipliers, torque wrenches and hydraulic bolt tensioners.

Page: 183

QuickFace – Mechanical Pipe Flange Face Tool



Mechanical Flange Face Tool

Portable, hand powered tool makes even the hardest to reach pipe flanges resurface-able in a safe and convenient way.

Makes refacing easy

A simple and cost effective solution – the FF-120 turns a two man operation with heavy equipment, compressors and portable generators into a one man job.

The FF-120 has interchangeable lead screws that make it suitable for resurfacing damaged flat-faced, raised-face or lens-ring joint flanges to the high safety standards required. After selecting the correct lead screw for the operation, the tool body is inserted in the pipe end and centres itself with adjustable locators to provide real concentric operation.

The tool arm is then rotated by hand using a worm-gear mechanism to provide a perfect spiral “gramophone” finish. The tool can be adjusted with a calibrated slide to define cut depth and the correct finish.

Surface finish & accuracy

A serrated finish with 30-55 grooves per inch and a resultant roughness of between Ra 3,2-12,5 μ (125-500 micro inches). The FF-120 has same precision and quality of finish as a lathe.

Cost effective solution

Small and portable enough to be a permanent addition to your equipment range, Enerpac’s FF-120 is the perfect solution to all of your small diameter facing problems.

FF Series



Pipe Flange Cutting Diameter Range:

Ø 25-305 mm / 1-12"

Internal Pipe Mounting Range:


Ø 25-152 mm / 1-6"

Cutting Resultant Roughness:


Ra 3,2 - 12,5 μ



- 1 Hand-operated cold work tool – no need for external power and hot work permits.
- 2 Calibrated cross slide for accurate cutting control.
- 3 Adjustable cutting head for reface of flat flange surfaces of pipes with flange OD facing range \varnothing 25,4-304,8 mm [1-12 inch].
- 4 Interchangeable lead screws enable selection of surface finish between Ra 3,2-12,5 μ .
- 5 Utilizes standard 3/8 inch or 10 mm tool steel.
- 6 Range of interchangeable collets allow the tool to accommodate \varnothing 25,4 - 152,4 mm (1 - 6 inch) pipe ID.
- 7 Tool body with expanding collets centers in the bore ensuring concentric and accurate set-up.

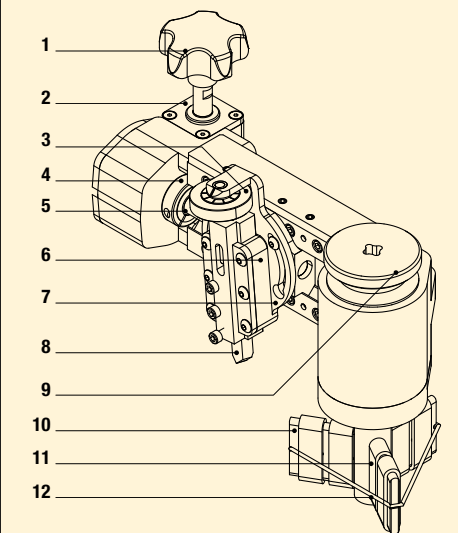

- | | |
|--------------------------------------------------------------------------|------------------------|
| 1 Feed Knob | 6 Tool Block |
| 2 Gear Box | 7 Swivel Slide |
| 3 Cutting Depth Adjustment with indicator: 0,127 mm (.005 inch) per mark | 8 HSS 3/8" Tool Bits |
| 4 Locking Collar | 9 Mandrel Locking Knob |
| 5 Lead/Feed Screw | 10 Locator Extensions |
| | 11 Adjustable Locators |
| | 12 O-Ring |

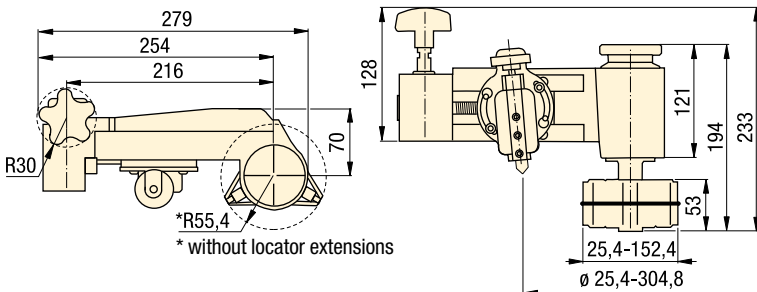

SELECTION CHART

| Pipe Flange Cutting Diameter Range | | Internal Pipe Mounting Diameter Range | | Cutting Resultant Roughness | Model Number | Weight (kg) |
|------------------------------------|------------|---------------------------------------|-----------|-----------------------------|--------------|-------------|
| (mm) | (inch) | (mm) | (inch) | | | |
| 25,4 - 304,8 | 1,0 - 12,0 | 25,4 - 152,4 | 1,0 - 6,0 | 3,2 - 12,5 | FF-120 | 6,8 |

▼ The Enerpac FF-120 QuickFace has same precision and quality of finish as a lathe.



Enerpac Heavy Lifting Technology provides customers with tailored solutions, combining hydraulics, steel fabrication and electronic control technology. Global Leader providing best in class solutions for safe and precise positioning of heavy loads.

With more than 50 years supporting industrial markets, Enerpac has gained the unique and in-depth expertise that is respected by industrial professionals around the world. Across every continent, Enerpac's network of application engineers, authorized distributors and technical service centers can reach any location, and deliver innovative solutions, technical assistance and quality products.

Enerpac's complete line of standard and customized products and a unique systems approach offers the benefits of safety and efficiency to applications where high forces are required.

Whether constructing a signature bridge across a deep valley, lifting a national landmark for seismic retrofit or simultaneously testing hundreds of foundation pilings to support a new building, Enerpac will supply the hydraulic solutions to get the job done.



Precision lift and position of heavy loads



Synchronous superlift and launch



Bridge lifting and launching



Jacking with high capacity precision control



Synchronous hoisting and load positioning



Incremental bridge lifting















Transportation



Special high tonnage cylinders for the Pioneering Spirit lifting beams

Heavy Lifting Technology - Section Overview

| Capacity ton (kN) | Capabilities | Series | Image | Page |
|------------------------------------|---------------------------------------------------------------------------------------------------------------|---------------------------------------|---------------------------------------------------------------------------------------|------------------------------|
| – | Split-Flow Hydraulic Pumps Multiple outlets with equal oil flow | SFP |  | 240 ▶ |
| – | Synchronous Lifting Systems, basic models The economical solution to basic applications | EVOB |  | 242 ▶ |
| – | Synchronous Lifting Systems, standard models The multi-functional synchronous lifting system | EVO |  | 244 ▶ |
| 50 - 200 (498 - 1995) | Climbing Jacks A simple solution to incremental lifting | BLS |  | 246 ▶ |
| 125 - 750 (1250 - 7500) | Jack-Up Systems Synchronously lift, mechanically hold | JS |  | 248 ▶ |
| 15 - 1250 (147 - 12.250) | Heavy Lifting Strand Jacks High capacity precision control | HSL |  | 250 ▶ |
| 55 - 110 (539 - 1078) | Synchronous Hoisting Systems - SyncHoist Precision positioning jacks | SHS |  | 252 ▶ |
| 110 - 225 (1078 - 2205) | Autonomous Hoisting Systems - SyncHoist Wireless remote control, integrated hydraulics | SHAS |  | 254 ▶ |
| 60 - 1100 (600 - 10.484) | Telescopic Hydraulic Gantries Precision lift and position of heavy loads | SL SBL MBL |  | 256 ▶ |
| 100 - 250 (860- 2500) | Skidding Systems The ideal jack and slide solution | HSK LH |  | 258 ▶ |
| 60 (600) | Self-Propelled Modular Transporters Hydraulic strength in a linear drive transport system | SPMT |  | 260 ▶ |
| – | Custom Solutions - Experience and Expertise Project Gallery – Custom Heavy Lifting Solutions | |  | 261 ▶ 262 ▶ |

▼ SFP613SW with 150 litres reservoir (shown with 6 split-flow outlets)



- Smart valve technology allows both controlled lifting and lowering of multiple points
- 2, 4, 6 or 8 split-flow outlets
- Valve operation with advance/hold/retract function
- Joystick (manual) or pendant (solenoid) control
- Flow per outlet from 0,27 to 4,2 l/min at 700 bar
- For double and single-acting cylinders
- Pressure compensated flow control per circuit
- Adjustable pressure relief valve per circuit
- All models include pressure gauge per circuit
- Reservoir: 20, 40 or 150 litres.



Multiple Outlets with Equal Oil Flow



Split-Flow Pump Applications

Split-Flow pumps distribute an equal amount of hydraulic oil to a maximum of 8 outlets. Smart valve technology allows both controlled lifting and lowering of heavy loads.

Pressure compensated flow control

This unique feature to our Split-Flow Pumps will ensure both smooth lifting and lowering, independent of load distribution.

For lifting applications Split-Flow Pumps are an efficient and safer alternative than using individual pumps. Where synchronization of maximum 4% is acceptable, Split-Flow pumps are a safe and economical solution.

Application examples:

- Bridge deck lifting for bearing maintenance
- Stage lifting in construction and shipbuilding
- Skidding to move structures and buildings.
- Levelling of constructions such as wind turbines.




Remote Control Pendant


Split-Flow pumps with solenoid valves include a remote pendant with selector switches for each individual outlet, allowing single or multiple cylinder operation.

◀ During manufacturing of container units, the Enerpac SFP404SW Split-Flow Pump with 4 outlets provide both lifting and load distribution function. The container units weight between 70 and 120 ton and are complete equipped as full operational shelter for specific applications in power-generation, mining and construction industries for on-site use.


Split-Flow Hydraulic Pumps

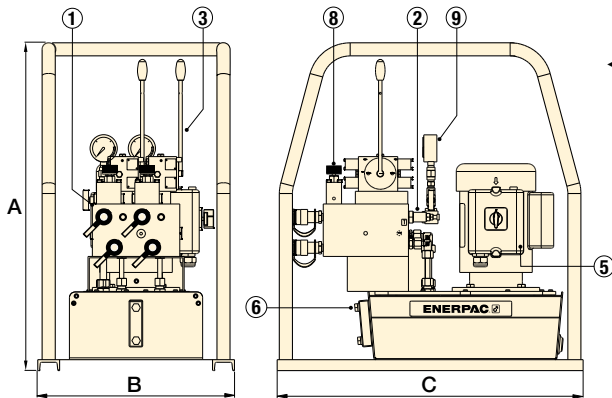

◀ SFP-Series with 20 litres reservoir (shown with 2 split-flow outlets)

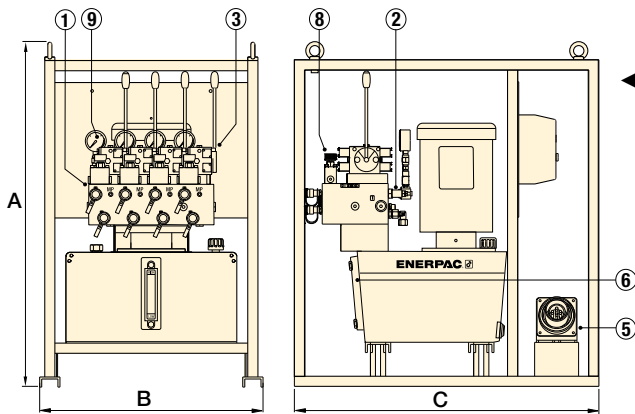

◀ SFP-Series with 40 litres reservoir (shown with 4 split-flow outlets)

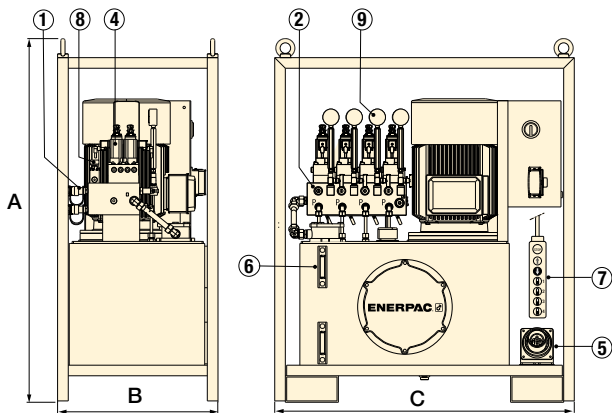

◀ SFP-Series with 150 litres reservoir (shown with 4 split-flow outlets)

SFP Series



Reservoir Capacity:

20 - 40 - 150 litres

Split-Flow Outlets:

2, 4, 6 and 8 outlets

Flow at Rated Pressure:

0,27 - 4,20 l/min

Maximum Operating Pressure:

700 bar



Lifting Cylinders

For a complete line of Enerpac cylinders, see the Cylinder and Lifting Products in our catalogue.

Page: **5**

- ① Manifold with split-flow outlets and CR-400 couplers
- ② Adjustable pressure relief valve per circuit
- ③ Manual 4/3 control valves with joysticks
- ④ Solenoid 4/3 control valves (24 VDC)
- ⑤ Power receptacle
- ⑥ Oil sight gauge(s)
- ⑦ Remote control pendant with 10 m cord
- ⑧ Return flow control valve in each circuit
- ⑨ Hydraulic pressure gauge in each circuit

| Number of Split-Flow Outlets | Reservoir Size (litres) | Oil Flow per Outlet @ 700 bar (l/min) | Pump Model Number | | Motor Size 400 V, 3ph 50 Hz (kW) | Dimensions (mm) | | | Weight (kg) |
|------------------------------|-------------------------|---------------------------------------|------------------------------------------------------------|-------------------------|----------------------------------|-----------------|-----|------|-------------|
| | | | 4/3 Valve Operation Advance/Hold/Retract Manual (Joystick) | 24 V Solenoid (Pendant) | | A | B | C | |
| 2 | 20 | 0,27 | SFP 202MW | – | 0,75 | 750 | 450 | 700 | 86 |
| | 40 | 1,30 | SFP 213MW | SFP 213SW | 5,5 | 1019 | 660 | 900 | 240 |
| | 150 | 2,80 | SFP 228MW | SFP 228SW | 7,5 | 1372 | 605 | 1130 | 488 |
| | 150 | 4,20 | SFP 242MW | SFP 242SW | 11 | 1372 | 605 | 1130 | 526 |
| 4 | 40 | 0,45 | SFP 404MW | SFP 404SW | 5,5 | 1019 | 660 | 900 | 240 |
| | 150 | 0,90 | SFP 409MW | SFP 409SW | 5,5 | 1372 | 605 | 1130 | 475 |
| | 150 | 1,40 | SFP 414MW | SFP 414SW | 7,5 | 1372 | 605 | 1130 | 488 |
| | 150 | 2,10 | SFP 421MW | SFP 421SW | 11 | 1372 | 605 | 1130 | 526 |
| 6 | 40 | 0,45 | – | SFP 604SW | 5,5 | 1019 | 660 | 900 | 240 |
| | 150 | 1,30 | – | SFP 613SW | 11 | 1372 | 805 | 1200 | 550 |
| 8 | 150 | 1,30 | – | SFP 813SW | 15 | 1372 | 805 | 1200 | 590 |

▼ Split-Flow Pump SFP409MW with 4 outlets and manual valves.



▼ EVOB 816W



- Pumps to control 4 to 8 lifting points
- Intuitive user interface provides easy set-up and control
- For use with standard single- or double-acting cylinders
- Built in warning and stop alarms for optimum safety
- Available in two oil flow options.

▼ Bridge maintenance: A 200 ton bridge was lifted using 8 cylinders to replace the old bearings.



The economical solution to basic lifting applications



The Basic EVOB-System

Leveraging Enerpac's market leading Z-Class pumps and components from the standard EVO, the Basic EVOB offers an economical solution to basic applications requiring stroke only control for a maximum of 8 lifting points.

The Basic EVOB-System has three work modes. The operator can navigate to any of these menus:

1. Manual
2. Automatic
3. Depressurize.



Typical Synchronous Lifting Applications

- Bridge lifting and repositioning
- Bridge launching
- Bridge maintenance
- Incremental launching and box jacking
- Lifting and lowering of heavy equipment
- Lifting, lowering, levelling and weighing of heavy structures and buildings
- Structural and pile testing
- Lifting and weighing of oil platforms
- Foundation levelling of onshore and offshore wind turbines
- De-propping/load transfer from temporary steel work
- Foundation shoring.

▼ Foundation repair: Synchronous lift system used to lift a 1000 ton building.



Basic Synchronous Lifting Systems



What is Synchronous Lifting?

To achieve high-precision movement of heavy objects it is necessary to control and synchronize the movements of multiple lifting points.

The PLC-control uses feedback from multiple sensors to control the lifting, lowering and positioning of any large, heavy or complex structure, regardless of weight distribution.

By varying the oil flow to each cylinder, the system maintains very accurate positional control. By eliminating manual intervention, the sync lift helps maintain structural integrity and increases the productivity and safety of the lift.

PLC-controlled synchronous lifting systems reduce the risk of bending, twisting or tilting, due to uneven weight distribution or load-shifts between the lift points.



Wire Stroke Sensors

- Ordered separately, requires one for each lifting point
- Provides stroke feedback to controls
- Includes magnets for mounting.



Stroke Sensor Cables

- Ordered separately, requires one for each stroke sensor
- Can be connected together for additional length.


| Stroke Sensor Model Number | Measuring Range (mm) |
|----------------------------|----------------------|
| EVO-WSS-500 | 500 |
| EVO-WSS-1000 | 1000 |

| Sensor Cable Model Number | Cable Length (metres) |
|---------------------------|-----------------------|
| EVO-SC-25 | 25 |
| - | - |

Voltage Options: To select voltage, change suffix W into required suffix.

- B** = 115 V, 1 Ph, 50-60 Hz
- E** = 208-240 V, 1 Ph, 50-60 Hz
- G** = 208-240 V, 3 Ph, 50-60 Hz
- W** = 380-415 V, 3 Ph, 50-60 Hz
- J** = 460-480 V, 3 Ph, 50-60 Hz
- R** = 575 V, 3 Ph, 60 Hz.

Example: **EVOB408E**. EVOB Basic Pump for 4 lift points, 0,82 l/min at 700 bar, and 1,12 kW motor 208-240 V, 1 Ph, 50-60 Hz.

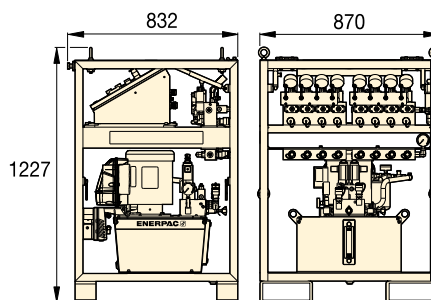

EVOB-Series (Basic)

| Lifting Points | Oil Flow at 50 Hz ¹⁾ (l/min) | | Model Number ²⁾ | Usable Oil Capacity (litres) | Motor Size (kW) | Motor Weight (kg) |
|----------------|-----------------------------------------|------------|----------------------------|------------------------------|-----------------|-------------------|
| | (< 80 bar) | (> 80 bar) | | | | |
| 4 | 8,88 | 0,82 | EVOB408E | 40 | 1,12 | 278 |
| 4 | 11,61 | 1,64 | EVOB416W | 40 | 2,24 | 284 |
| 8 | 8,88 | 0,82 | EVOB808E | 40 | 1,12 | 278 |
| 8 | 11,61 | 1,64 | EVOB816W | 40 | 2,24 | 284 |

¹⁾ Oil flow will be approximately 6/5 of these values at 60 Hz.

²⁾ For other voltages options see information above this selection chart.

EVOB Series



Number of Lifting Points:

4 - 8

Reservoir Capacity:

40 litres

Flow at Rated Pressure:

0,82 - 1,64 l/min

Motor Size:

1,12 - 2,24 kW

Maximum Operating Pressure:

700 bar



Lifting Cylinders

For a complete line of Enerpac cylinders, see the Cylinder and Lifting Products in our catalogue.



Multi-functional Synchronous Lifting Systems

For more than 8 lifting points, to link up to 4 systems together and weighing system see the EVO-Standard Series.

▼ **Box jacking:** Multi-point synchronous system to push hydraulically the tunnel segments under the railway.



▼ EVO 841460W



- Modular lifting pumps to control 4, 8 or 12 lifting points
- Can be connected to single- or double-acting cylinders with the same or different lifting capacities
- PLC-controlled system with integrated 700 bar hydraulic power unit and 250 litres reservoir
- Network capability to link up to 4 HPU's to a separate master control box via wireless control
- Intuitive user interface providing easy set up, control and navigation
- Data storage and recording capabilities
- Variable frequency drive motor (VFDM) and PLC for precise synchronization and oil flow control.



The multi-functional synchronous lifting systems



EVO-System Work Modes

The application possibilities are infinite with the standard EVO-System, powering interlinked hydraulic cylinders – single or double-acting, push or pull, stage lift, hollow plunger or lock nut cylinders. The EVO-System has 9 work modes. The operator can navigate to any of these menus:

1. Manual
2. Pre-Load
3. Automatic
4. Retract Fast
5. Depressurize
6. Tilting
7. Stage Lift
8. Weighing *
9. Center of Gravity determination *

* Available in the EVO-W-models.



Typical Synchronous Lifting Applications

- Bridge lifting and repositioning
- Bridge launching
- Bridge maintenance
- Incremental launching and box jacking
- Lifting and lowering of heavy equipment
- Lifting, lowering, levelling and weighing of heavy structures and buildings
- Structural and pile testing
- Lifting and weighing of oil platforms
- Foundation levelling of onshore and offshore wind turbines
- De-propping/load transfer from temporary steel work
- Foundation shoring.

◀ The superlifting and launch of a 43.000-ton floating oil production system in Malaysia for the Gumusut-Kakap offshore field has set high benchmarks for safety through its use of sophisticated EVO-Series synchronous hydraulics to lift, balance, weigh and smoothly launch massive resource structures.



Benefits of the EVO-Series System

Precise control of multiple lift points

- Comprehensive understanding and management of a lifting operation from a central control system improves safety and operational productivity.
- Programmable synchronized lifting.
- Automatic stop at pre-set cylinder stroke or load limit.

Safe and efficient movement of loads

- System secured with warning and stop features to realize optimal safety.

High accuracy

- Variable frequency drive (VDFM) and PLC for precise synchronization and control of oil flow, stroke and speed.
- Depending the cylinder capacities used, an accuracy of 1,0 mm between lifting points is achieved.

Ease of operation

- User friendly interface: visual screens, icons, symbols and color coding.
- A single operator controls the entire operation.

Monitoring and Data Recording

- Displays data of the operation.
- Data recording at user-defined intervals.
- Data storage and read-out for reporting.

Network capability

- Ethernet IP protocol for communication between hydraulic power units, allow easy "plug and play".

EVO-W Weighing System

Weighing applications with 1% accuracy

- Includes calibrated sensors and auto-calibration of external load cells.
- Center of gravity determination functionality.
- Parameters for "waiting time for stabilization" and "number of cycles".

Global standardized system

- Enerpac global coverage ensures local support.

EVO Series



Number of Lifting Points:

4 - 8 -12 (up to 48)

Reservoir Capacity:

250 litres

Flow at Rated Pressure:

0,75 - 4,80 l/min

Motor Size:

3,50 - 7,50 kW

Maximum Operating Pressure:


700 bar



Stroke Sensors and Cables

Optional accessories required for each lifting point and stroke sensor.

Page: **243**

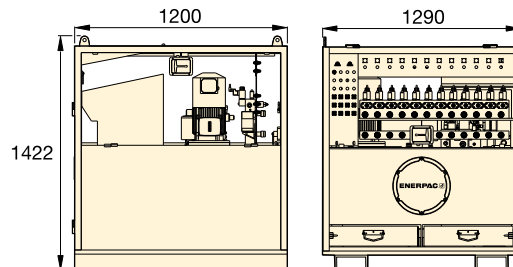

Master Control Box

Required to link up to 4 standard EVO-pumps together to achieve a maximum of 48 lifting points. Contact Enerpac for more information.

EVO-Series (Standard)

| Lifting Points | Variable Oil Flow at 50 Hz ¹⁾ (l/min) | | Model Number ²⁾ 380-415 V, 3ph, 50-60Hz | Usable Oil Capacity (litres) | Motor Size (kW) | Motor Speed ⁴⁾ | (kg) |
|----------------|--------------------------------------------------|-------------|----------------------------------------------------------|------------------------------|-----------------|---------------------------|------|
| | (< 125 bar) | (> 125 bar) | | | | | |
| 4 | 4,0 - 13,3 | 0,75 - 2,51 | EVO 421380 | 250 | 3,5 | VFDM | 910 |
| 4 | 4,0 - 13,3 | 0,75 - 2,51 | EVO 421380 W³⁾ | 250 | 3,5 | VFDM | 910 |
| 4 | 4,7 - 15,6 | 1,44 - 4,80 | EVO 440380 | 250 | 7,5 | VFDM | 1005 |
| 4 | 4,7 - 15,6 | 1,44 - 4,80 | EVO 440380 W³⁾ | 250 | 7,5 | VFDM | 1005 |
| 8 | 4,0 - 13,3 | 0,75 - 2,51 | EVO 821380 | 250 | 3,5 | VFDM | 910 |
| 8 | 4,0 - 13,3 | 0,75 - 2,51 | EVO 821380 W³⁾ | 250 | 3,5 | VFDM | 910 |
| 8 | 4,7 - 15,6 | 1,44 - 4,80 | EVO 840380 | 250 | 7,5 | VFDM | 910 |
| 8 | 4,7 - 15,6 | 1,44 - 4,80 | EVO 840380 W³⁾ | 250 | 7,5 | VFDM | 910 |
| 12 | 4,0 - 13,3 | 0,75 - 2,51 | EVO 1221380 | 250 | 3,5 | VFDM | 920 |
| 12 | 4,0 - 13,3 | 0,75 - 2,51 | EVO 1221380 W³⁾ | 250 | 3,5 | VFDM | 920 |
| 12 | 4,7 - 15,6 | 1,44 - 4,80 | EVO 1240380 | 250 | 7,5 | VFDM | 1025 |
| 12 | 4,7 - 15,6 | 1,44 - 4,80 | EVO 1240380 W³⁾ | 250 | 7,5 | VFDM | 1025 |

¹⁾ Oil flow will be approximately 6/5 of these values at 60 Hz. ²⁾ For 460-480 VAC, 3 phase, 50-60 Hz change 380 in model number into 460. Example **EVO421460**.

³⁾ Model numbers with suffix **W** are pumps for weighing systems. ⁴⁾ VFDM = Variable Frequency Drive 15-50 Hz.

▼ Precision levelling caisson pier box: 3 EVO-Systems connected with 32 jacks lowered the 1100 ton bascule pier box.



▼ BLS-1006



- Climbing jacks include integral tilt saddles with maximum tilt angles up to 5 degree
- Large base with anti-rotation rod for stability and safety
- Built-in safety valve prevents accidental over-pressurization
- Ideal in combination with the stage lift work mode of the EVO-Series synchronous lifting system
- Baked enamel finish for increased corrosion resistance
- CR400 couplers included on all models.

▼ Synchronous Stage Lifting: 48 double-acting jacks (25 and 50 ton) are networked in to a 16 points synchronous system to lift this 50 metres long, 1000 ton building up to a height of 2,5 metres to construct a new floor level.



A Simple Solution to Incremental Lifting



Lifting Height

Climbing Jacks overcome the usual limitation of lifting height imposed by the cylinder's plunger stroke length. Large objects, such as oil tanks, can be lifted, held and lowered for maintenance without sending for a crane.



Split-Flow Pumps

SFP-Series Pumps with multiple outlets with equal oil flow. For lifting and lowering applications on multiple points Split-Flow Pumps are a far better alternative than using separately operated pumps.

Page: 240



Synchronous Lifting System

The standard EVO-Series System is ideal for stage lifting, powering interlinked hydraulic cylinders. The EVO-system has 9 work modes including the stage lift work mode.

Page: 244



Jack-Up Systems

For incremental lifting with higher lifting capacities and up to 20 m lifting height, see our JS-Series Jack-Up Systems.

Page: 248

| Cylinder Capacity | Stroke | Model Number | Max. Cylinder Capacity (kN) | |
|-------------------|--------|-----------------|-----------------------------|------|
| | | | Push | Pull |
| ton | (mm) | | | |
| 50 | 150 | BLS-506 | 498 | 103 |
| 95 | 161 | BLS-1006 | 933 | 435 |
| 140 | 151 | BLS-1506 | 1386 | 668 |
| 200 | 151 | BLS-2006 | 1995 | 1017 |

Double-Acting Climbing Jacks



◀ Typical stage-lift application using a custom built Enerpac system to lift the 360 ton Akkerwinde wooden bridge in the Netherlands.

BLS Series



Capacity per Lifting Point:





50 - 200 ton

Stroke per Stage:

150 - 161 mm

Maximum Operating Pressure:

700 bar

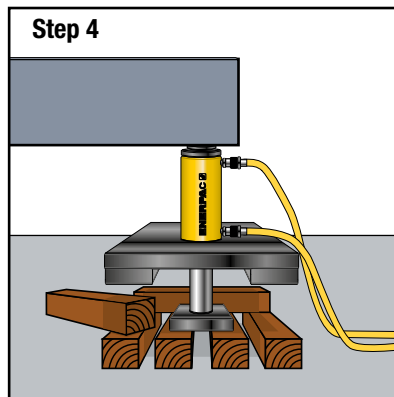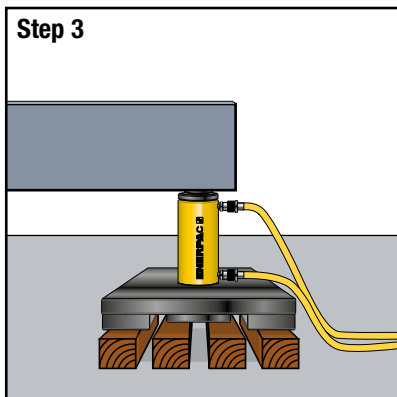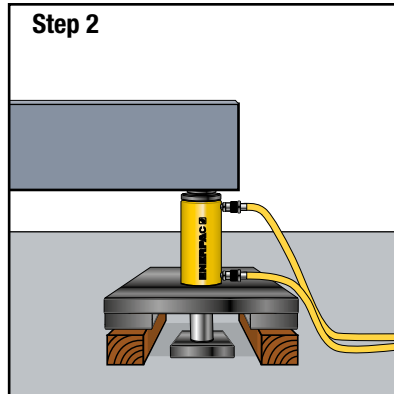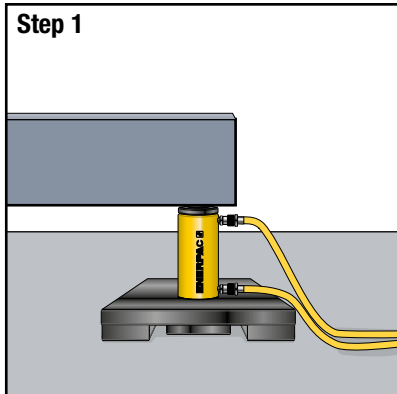


▲ Stage Lifting Sequence

Step 1: The climbing jack is placed on a solid support under the load (retracted plunger).

Step 2: Plunger extends, lifting the load and giving clearance to insert two outer blocks under the spreading plate.

Step 3: Plunger retracts, giving clearance to position the central blocks which will support the plunger plate for the next extension.

Step 4: Plunger extends, lifting the load, giving clearance to insert two new blocks, placed crosswise under the spreading plate.

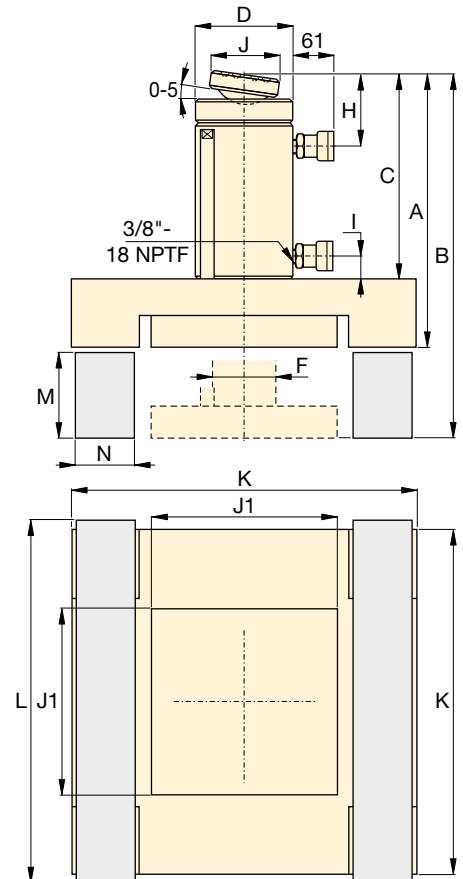

| Cylinder Effective Area (cm ²) | | Oil Capacity (cm ³) | | Dimensions (mm) | | | | | | | | | | Cribbing Blocks * and Dimensions (mm) | | | Model Number | | |
|--------------------------------------------|-------|---------------------------------|------|-----------------|-----|-----|-----|-----|-----|----|-----|-----|-----|---------------------------------------|-----|-----|--------------|------|-----------------|
| Push | Pull | Push | Pull | A | B | C | D | F | H | I | J | J1 | K | Material | L | M | N | (kg) | |
| 71,2 | 21,5 | 1111 | 335 | 406 | 556 | 318 | 127 | 79 | 56 | 36 | 50 | 240 | 515 | Azobe | 565 | 140 | 120 | 170 | BLS-506 |
| 133,3 | 62,2 | 2238 | 1045 | 445 | 606 | 343 | 177 | 95 | 76 | 24 | 71 | 330 | 670 | Wood | 720 | 150 | 160 | 315 | BLS-1006 |
| 198,1 | 95,4 | 3090 | 1488 | 472 | 624 | 370 | 203 | 114 | 94 | 39 | 130 | 230 | 475 | Solid Aluminium or Steel | 500 | 140 | 115 | 322 | BLS-1506 |
| 285,6 | 145,6 | 4332 | 2209 | 510 | 661 | 387 | 248 | 133 | 102 | 37 | 130 | 270 | 550 | | 575 | 140 | 135 | 373 | BLS-2006 |

* Cribbing blocks are not supplied by Enerpac.

▼ JS-250, Enerpac Jack-Up System (one lifting tower shown)



- Self-contained hydraulics in each jack-up unit for uncluttered work area
- Synchronously lift loads with multiple jack-up units. The most common system set-up includes 4 jack-up units
- Lifting barrels are stacked together to mechanically hold the load
- Up to 5% side load capacity depending on lifting height
- Computer controls for operating the jack-up system with automatic and manual lifting settings.

Incremental Lifting System – Synchronously Lift and Mechanically Hold



Typical Applications

- Bridge maintenance
- Lifting and lowering of heavy equipment
- Lifting, lowering and levelling of heavy structures and buildings
- De-propping/load transfer from temporary steel work.



Computer Controls

Enerpac Jack-up Systems provide precision control suitable for many demanding lifting/lowering applications. The comprehensive self-contained design features simple to use software.

- Automatic synchronization of multiple networked lift points.
- Overload and stroke alarms
- Emergency stop switch at jack-up units and controls.

▼ Enerpac has been awarded a contract by Burkhalter to extend the height of Enerpac's 2000 ton (500 ton per tower) jack-up system from 20m to 36m for future projects.



▼ A load is lifted in increments as barrels are slid into the system, lifted, and stacked; forming 'lifting towers'.



▼ Lifting barrels are stacked together to mechanically hold the load



Enerpac Jack-Up Systems



Enerpac Jack Up Systems

The jack up system is a custom developed multi-point lifting system. A typical system setup includes four jack up units positioned under each corner of a load.

Example: A four unit setup with JS250 has a lifting capacity of 1000 ton (250 ton per unit). The lifting frame of a jack up unit contains four hydraulic lifting cylinders, one in each corner, which lift the load using the stacked steel barrels.

A load is lifted in increments as barrels are slid into the system, lifted, and stacked; forming 'lifting towers'. A jack up system is operated and controlled by a computer control unit.

Each unit's lifting and lowering operations occur simultaneously; the computer control unit's synchronous technology maintains the balance of the load.

JS Series




Capacity Per Lifting Tower:

125 - 750 ton


Lifting Height:

Up to 6 - 20 metres

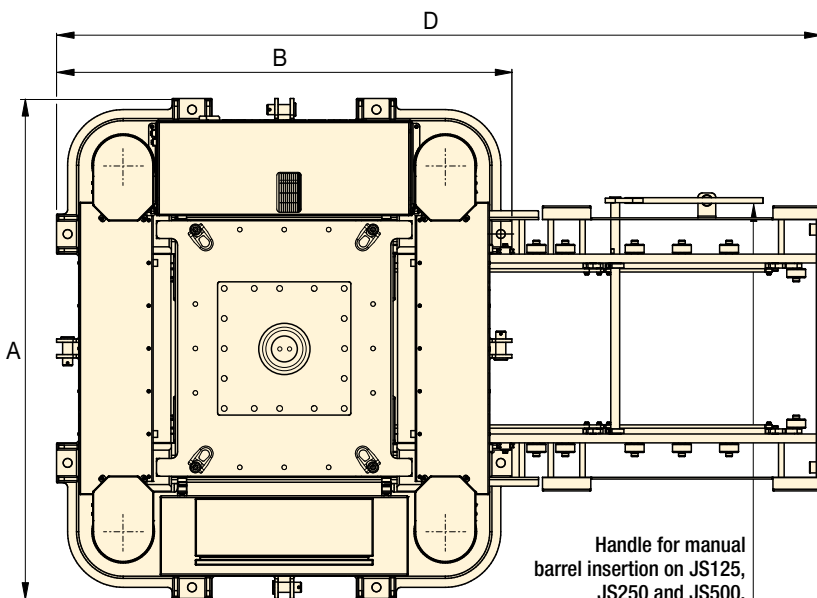

End barrel with 3D Swivel

Handle for manual barrel insertion on JS125, JS250 and JS500. Automatic barrel insertion on JS750

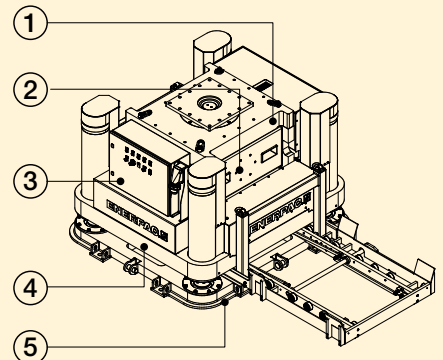

Enerpac Jack Up Systems

- ① End Barrel
- ② Barrel
- ③ Electric Powerpack
- ④ Lifting Frame
- ⑤ Base Frame



Contact Enerpac!

Contact the Enerpac office nearest to you for advice and technical assistance in the layout of your ideal Lifting

System or visit us at: www.enerpac.com.

Or ask Enerpac for assistance:

enerpac.com/contact-us

▼ Enerpac jack-up system hoists 1500 ton span on Fore River Bridge.



Jack-Up Systems

| Capacity per Tower ton (kN) | Model Number | Maximum Sideload | Base Frame Dimensions (mm) | | | | Barrel Dimensions L x W x H (mm) | Weight (kg) * |
|--------------------------------|---------------|------------------|----------------------------|------|------|------|----------------------------------|---------------|
| | | | A | B | C | D | | |
| 125 (1250) | JS-125 | 3% @ 6m | 1200 | 1100 | 950 | 1850 | 600x600x300 | 2400 |
| 250 (2500) | JS-250 | 3,5% @ 10m | 2250 | 2050 | 1475 | 3450 | 1150x1150x500 | 7500 |
| 500 (5000) | JS-500 | 4% @ 15m | 2800 | 2300 | 1700 | 4500 | 1700x1700x700 | 13.000 |
| 750 (7500) | JS-750 | 5% @ 20m | 3670 | 3250 | 2375 | 6100 | 2300x2300x1000 | 24.000 |

* Weight per jack up unit, excluding barrels.

▼ Shown: HSL50006 Strand Jack



- Precision control of synchronous lifting and lowering
- Can be controlled by a single operator from a central location for increased safety
- Automated locking - unlocking operation
- Two strand sizes: 15,7 mm and 18 mm (.62 and .71 inch)
- Telescopic strand guide pipes prevent bird caging
- Internal components are coated with Lunac, an anti-corrosion coating, making it suitable for marine environments
- Lifting anchor included with all strand jacks
- Lloyd's witness tested to 125% of maximum working load.

▼ *Songdo Bridge, South Korea: Four HSL85007 strand jacks were installed on top of a temporary bent tower and simultaneously lifted both pylons up to their permanent position at 75 degrees. The lift was monitored and controlled using a computer controlled strand jack system with 30 kW hydraulic power units.*



High Capacity Precision Control



Heavy Lifting Strand Jacks

Enerpac strand jacks are the strand jacks of choice for customers seeking precise synchronous control with heavy-lifting capacity in an economical, compact, and reliable foot print.

Enerpac strand jacks are powered by electrical or diesel driven hydraulic power packs and controlled by Enerpac's proprietary SCC-Smart Cylinder Control System to ensure full control of lifting and lowering operations.

Enerpac continually improves reliability, durability, and safety of their strand jacks, making them an industry standard for heavy lifting.

▼ *HSL85007 Strand Jack System used on Enerpac custom Self Erecting Tower.*



Heavy Lifting Strand Jacks



Strand Jacks

A strand jack can be considered a linear winch. In a strand jack, a bundle of steel strands are guided through a main "lifting" jack.

Above and below the cylinder are anchor systems with wedges that grip the strand bundle simultaneously. Lifting and lowering a load is achieved by hydraulically controlling the main jack and both mini jacks alternately.

In the case of system pressure loss, the wedges are mechanically closed automatically, holding the suspended load in place.

Today strand jacks are widely recognized as the most sophisticated heavy lifting solution. They are used all over the world to erect bridges, load out offshore structures, and lift/lower heavy loads where the use of conventional cranes is neither economical nor practical.


HSL Series



Capacity:
15 - 1250 ton

Stroke:
250 - 600 mm

Maximum Operating Pressure:
350 bar

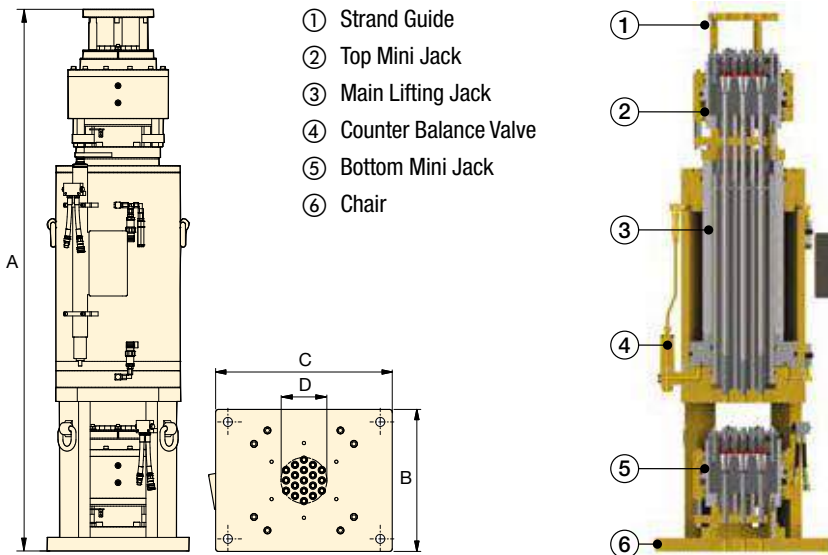

▼ Strand Jack Accessories

Contact Enerpac for assistance by email at integratedsolutions@enerpac.com



Hydraulic Power Packs

Enerpac offers a comprehensive range of hydraulic power packs that are optimized for use with their industry leading heavy lifting strand jacks.



Strand Guides

Provides a guide for the strand as a strand jack lifts the load.



Strand Recoilers

Passively pays in or pays out strands while jacking and lowering.



Strand Dispenser

Essential to safely unbundle a new strand coil.



Lifting Anchor

Each Strand Jack includes a lifting anchor for attaching strand to the load.

| Strand Diameter mm (inch) | Capacity * | | Model Number | Number of Strands | Stroke (mm) | Dimensions (mm) | | | | ⚖️ (kg) |
|------------------------------|------------|-----------|--------------|-------------------|-------------|-----------------|------|------|------|---------|
| | ton | (kN) | | | | A | B | C | D | |
| 15,7 (.62) | 30 | (300) | HSL3006 | 3 | 480 | 1851 | 350 | 500 | 59 | 500 |
| | 70 | (700) | HSL7006 | 7 | 480 | 1915 | 360 | 575 | 93 | 640 |
| | 200 | (2000) | HSL20006 | 19 | 480 | 1992 | 522 | 650 | 169 | 1300 |
| | 300 | (3000) | HSL30006 | 31 | 480 | 2046 | 673 | 673 | 216 | 2180 |
| | 500 | (5000) | HSL50006 | 48 | 480 | 2136 | 733 | 733 | 273 | 3150 |
| 18 (.71) | 15 | (150) | HSL1507 | 1 | 250 | 1242 | 220 | 220 | 20 | 100 |
| | 45 | (450) | HSL4507 | 3 | 480 | 1728 | 350 | 500 | 73 | 500 |
| | 60 | (600) | HSL6007 | 4 | 480 | 1752 | 400 | 625 | 88 | 650 |
| | 100 | (1000) | HSL10007 | 7 | 480 | 1926 | 408 | 625 | 116 | 850 |
| | 200 | (2000) | HSL20007 | 12 | 480 | 2001 | 522 | 650 | 165 | 1400 |
| | 300 | (3000) | HSL30007 | 19 | 480 | 2055 | 673 | 673 | 210 | 2180 |
| | 450 | (4500) | HSL45007 | 31 | 480 | 2223 | 733 | 733 | 272 | 3050 |
| | 650 | (6500) | HSL65007 | 43 | 480 | 2237 | 850 | 850 | 351 | 3950 |
| | 850 | (8500) | HSL85007 | 55 | 480 | 2402 | 900 | 900 | 364 | 5000 |
| | 1000 | (10.000) | HSL100007 | 66 | 480 | 2558 | 1092 | 1092 | 436 | 7650 |
| 1250 | (12.500) | HSL125007 | 84 | 600 | 2658 | 1100 | 1100 | 458 | 8300 | |

* Capacity is based on 2,5 minimum safety factor over strand breaking load.

▼ SHS-Series 4-Point SyncHoist System



- High precision load manoeuvring, vertically and horizontally – using one crane
- Reduces the risk of damage from oscillations of wire rope due to crane jogging and sudden starts/stops
- Vastly improving worker safety, operating speed and control
- Weather conditions play less critical role
- PLC-controlled hydraulics turn lifting into high accuracy hoisting and load positioning system
- Double-acting push/pull cylinders with load holding valves for added safety in case of hose rupture or coupler damage
- Cost reduction compared to conventional load positioning methods.

Options for system management & control:

- Manual control: system warning functions
- Automatic control: fully PLC-monitored system with programmable functions using touch screen and system warning functions.

▼ Bridge segments are hoisted from the ground, being positioned with a 4-point SyncHoist system with fully monitored cylinders.



▼ An SyncHoist system used to align steel blocks of the ship's control tower sections allowing gradual lift and positioning of the load.



Accurate Hoisting and Load Positioning Enhancing a Crane's Capability



Synchronous Hoisting

Enerpac SyncHoist is a unique crane product for below-the-hook positioning of heavy loads that require precision placement. The SyncHoist system may reduce the number of cranes needed and reduce the costs of multiple picks.

Functions

- High precision horizontal and vertical load positioning
- Pre-programmed positioning, tilting and aligning.

Applications

- Positioning of rotor, stator and propeller blades of wind turbines
- Positioning of roof sections, concrete elements, steel structures
- Positioning of turbines, transformers, fuel rods
- Precise machinery loading, mill rod changes, bearing changes
- Precise positioning of pipe lines, blow out valves
- Positioning and aligning of ship segments prior to assembly.

▼ SyncHoist lifts and positions Brisbane Riverwalk concrete girders



SyncHoist - High Precision Load Positioning



What is SyncHoist?

Enerpac SHS-Series SyncHoist is a hydraulically operated auxiliary attachment for high precision load positioning for cranes.

The automatic version with PLC-controlled hydraulic pump monitors and guides the powerful double-acting push-pull cylinders integrated into the lifting points above the load. The SyncHoist system can be used for pre-programmed positioning, tilting and aligning of loads.

- Patented system
- Complete system tested in compliance with European lifting directive and safety requirements

SyncHoist improves safety, operating speed and control of load movement

Geometric positioning of heavy loads in a horizontal and vertical plane are frequently done using more than one crane.

Synchronising movements between cranes are difficult and risky. The lifting inaccuracy can result in damage to the load and support structures and puts workers at risks.

The SyncHoist system can be used for controlled hydraulic horizontal and vertical material handling.

System management and control

Contact Enerpac for the following options, or other customised stroke, capacity and control configurations.

1. Manual control

- Valves with manual levers
- Warnings for thermal motor protection
- Visual check: oil level, filter indicator.

2. Automatic control

- Load and stroke monitoring, and stroke control
- PLC-control and touch screen
- Solenoid valves with pendant
- Pre-programmable motions and data recording
- System warnings for:
 - maximum cylinder load control setting
 - stroke and position control
 - thermal motor protection
 - oil level and filter indicator.


SyncHoist Power Packs

SyncHoist Power Packs are specifically designed to work with the SyncHoist cylinders to insure proper operation of the system. Contact Enerpac for assistance at enerpac.com/contact-us

SHAS-Series, Wireless SyncHoist

See next page for wireless remote control system with integrated hydraulics.

SHS Series



Capacity Per Lifting Point:

55 - 85 - 110 ton

Maximum Stroke:


500 - 1000 - 1500 mm

Accuracy Over Full Stroke:

± 1,0 mm

Maximum Operating Pressure:

700 bar

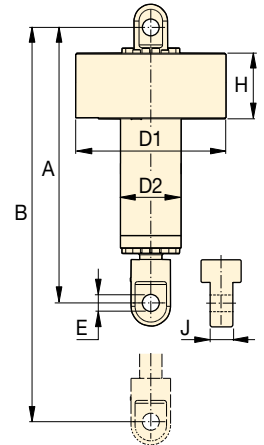

| Capacity | Total Load | Cylinder Stroke | Model Number ¹⁾ | Control System | Motor Size | Number of Pump Outlets and Oil Flow ²⁾ | Cylinder Dimensions (mm) | | | | | | | Weight (kg) ³⁾ |
|-------------------|---------------|-----------------|----------------------------|----------------|------------|---------------------------------------------------|--------------------------|------|-----|-----|----|-----|-----|---------------------------|
| | | | | | | | A | B | D1 | D2 | E | H | J | |
| 4 x 55 (539) | 220 (2156) | 500 | SHS 45520 MW | Manual | 7,5 | 4 x 1,4 | 1300 | 1800 | 690 | 245 | 59 | 385 | 80 | 450 |
| | | 1000 | SHS 45540 MW | | | | 1800 | 2800 | | | | | | 625 |
| | | 1500 | SHS 45560 MW | | | | 2300 | 3800 | | | | | | 800 |
| | | 500 | SHS 45520 AW | Automatic | 15 | 4 x 2,1 | 1300 | 1800 | 450 | | | | | |
| | | 1000 | SHS 45540 AW | | | | 1800 | 2800 | 625 | | | | | |
| | | 1500 | SHS 45560 AW | | | | 2300 | 3800 | 800 | | | | | |
| 4 x 85 (833) | 340 (3332) | 500 | SHS 48520 MW | Manual | 11 | 4 x 2,1 | 1330 | 1830 | 690 | 265 | 72 | 385 | 100 | 500 |
| | | 1000 | SHS 48540 MW | | | | 1830 | 2830 | | | | | | 700 |
| | | 1500 | SHS 48560 MW | | | | 2330 | 3830 | | | | | | 900 |
| | | 500 | SHS 48520 AW | Automatic | 15 | 4 x 2,1 | 1330 | 1830 | 500 | | | | | |
| | | 1000 | SHS 48540 AW | | | | 1830 | 2830 | 700 | | | | | |
| | | 1500 | SHS 48560 AW | | | | 2330 | 3830 | 900 | | | | | |
| 4 x 110 (1078) | 440 (4312) | 1000 | SHS 411040 MW | Manual | 11 | 4 x 2,1 | 1855 | 2855 | 780 | 315 | 85 | 395 | 124 | 970 |
| | | 1500 | SHS 411060 MW | | | | 2355 | 3855 | | | | | | 1235 |
| | | 1000 | SHS 411040 AW | Automatic | 15 | 4 x 2,1 | 1855 | 2855 | | | | | | 970 |
| | | 1500 | SHS 411060 AW | | | | 2355 | 3855 | | | | | | 1235 |

¹⁾ With 4 cylinders and one 400 VAC-3 phase-50 Hz Powerpack (suffix W). For 460-480 VAC-3 phase-60 Hz Powerpack change suffix W into J. Example: SHS 45560 MJ.

²⁾ Pump and cylinders include 4x 25 meters hydraulic hoses with couplers.

³⁾ Weight per cylinder

▼ SHAS411040WE Autonomous SyncHoist System demonstrated using a load simulation



- High precision load manoeuvring using one crane
- Vastly improving worker safety, operating speed and control
- Integrated PLC-controlled hydraulics in each lifting device – no need for external powerpack and hydraulic hoses
- Wireless control for safe operation
- Quick installation, set-up and operation - one electric connection per lifting point
- Cost reduction compared to conventional load positioning methods.

▼ A single operator controls and oversees the entire hoisting job - the portable wireless control allows him to be at a safe distance.



▼ Rigging engineers used the SyncHoist system to precisely monitor and adjust each lifting point independently, or together in a synchronized manner to position the 1140 ton nuclear plant module.



Accurate Hoisting and Load Positioning Enhancing a Crane's Capability



Autonomous SyncHoist System

Enerpac Autonomous SyncHoist System is a unique crane product for below-the-hook positioning of heavy loads that require precision placement. The SyncHoist system may reduce the number of cranes needed.

Functions

- High precision horizontal and vertical load positioning
- Pre-programmed positioning, tilting and aligning.

Applications

- Positioning of rotor, stator and propeller blades of wind turbines
- Positioning of roof sections, concrete elements, steel structures
- Positioning of turbines, transformers, fuel rods
- Precise machinery loading, mill rod changes, bearing changes
- Precise positioning of pipe lines, blow out valves
- Positioning and aligning of ship segments prior to assembly.

▼ Offshore wind turbine base foundations installed with a wireless SyncHoist System to ensure the foundation remained vertical during lowering and positioning.



SyncHoist - High Precision Load Positioning



What is SyncHoist?

Enerpac SHAS-Series SyncHoist is a hydraulically actuated auxiliary attachment for high precision load positioning for cranes.

The autonomous system (SHAS) with integrated PLC-controlled hydraulics, monitors and guides the powerful double-acting push-pull cylinders which are integrated into the lifting points.

The SyncHoist system can be used for pre-programmed positioning, tilting and aligning of loads.

- Complete system in compliance with European lifting directive and safety requirements

SyncHoist improves safety, operating speed and control of load movement

Geometric positioning of heavy loads in a horizontal and vertical plane are frequently done using more than one crane. Synchronising movements between cranes are difficult and risky. The lifting inaccuracy can result in damage to the load and support structures and puts workers at risk. The SyncHoist system can be used for controlled hydraulic horizontal and vertical material handling.

Autonomous system

- Wireless remote control
- Only one electric power connection per lifting point
- Integrated hydraulics, PLC and controls
- No need for hydraulic hoses and cables
- No need for mid-hoist disconnection of hoses and movement of pump.

Modular system

- Standard with four lifting devices.
- Quick installation, set-up and operation.

PLC-controlled system

- Pre-programmable motions
- Data recording
- Load control
- Stroke control
- Alarms for overload
- Real time indication of force and stroke per lifting point
- Controlled adjustment of forces per lifting point during entire operation.

Wireless controls

- Operate from safe distance
- Portable, no cables
- Siemens wireless 7 inch touch screen control panel
- Emergency stop, TÜV certified in PROFISAFE.

SHAS Series



Capacity Per Lifting Point:


110 - 225 ton

Maximum Stroke:

1000 - 1500 mm

Accuracy Over Full Stroke:

± 1,0 mm

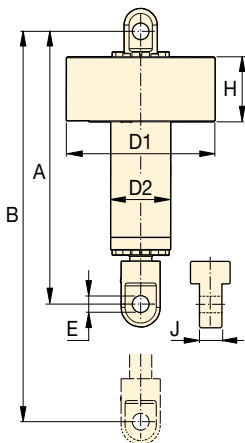

SyncHoist system mounted in an auxiliary frame for levelling and positioning steel structures during construction of an oil & gas installation. ▶



| Capacity | Total Load | Cylinder Stroke | Model Number ¹⁾ 400-500 VAC, ²⁾ 3ph - 50-60Hz | Control System | Motor Size | Dimensions (mm) | | | | | | | (kg) ³⁾ |
|------------------------------|----------------------|-----------------|---------------------------------------------------------------------------|----------------|------------|-----------------|------|------|-----|-----|-----|-----|--------------------|
| | | | | | | A | B | D1 | D2 | E | H | J | |
| 4 x 110 (4 x 1078) | 440 (4312) | 1000 | SHAS 411040 WE | Wireless | 4 x 4,0 | 1855 | 2855 | 1063 | 315 | 85 | 540 | 124 | 1183 |
| | | 1500 | SHAS 411060 WE | | | 2355 | 3855 | 1063 | 315 | 85 | 540 | 124 | 1448 |
| 4 x 225 (4 x 2204) | 900 (8820) | 1000 | SHAS 422540 WE | Wireless | 4 x 8,0 | 2140 | 3140 | 1235 | 420 | 142 | 580 | 190 | 3219 |
| | | 1500 | SHAS 422560 WE | | | 2640 | 3640 | 1235 | 420 | 142 | 580 | 190 | 3414 |

¹⁾ Standard with 4 lifting points. For more or less lifting points contact Enerpac.

²⁾ WE = with European electrical wiring. Change into suffix "WU" for US-market. Example: **SHAS 411060WU**. ³⁾ Weight per cylinder.

▼ SBL1100 with optional skid tracks, header beams, powered side shifts and lifting anchors



- Self-contained hydraulics and electronics
- Intelli-Lift wireless control system
- Self-propelled wheels or tank rollers
- Foldable boom on SBL900, SBL1100, MBL500 and MBL600
- Full range of supplementary equipment: header beams, lifting anchors, side shifts and skid tracks
- Designed and tested to meet ASME B30.1-2015 safety standards
- Lloyds witness tested to 125% of maximum working load.

▼ Two SBL1100 telescopic hydraulic gantry systems lifted the 1300 ton hydrocracker off the barge onto a SPMT Self-Propelled Modular Transporter.



Precision Lift and Position of Heavy Loads

The Ultimate in Safety and Control



Intelli-Lift Wireless Control

The Intelli-Lift wireless control system is included with all Enerpac hydraulic gantries.

The Intelli-Lift controller offers superior safety and control and includes the following features:

- Encrypted bi-directional communication that eliminates interference from other devices
- Remote operation using multi channel wireless (2.4 GHz) or wired (RS-485) control
- High and low speed settings
- Automatic synchronization of lifting with an accuracy of 24 mm (0.95 inch)
- Automatic synchronization of travelling with an accuracy of 15 mm (0.60 inch)
- Overload and stroke alarms
- Remote side shift control
- Emergency stop switch.

| Maximum Capacity (with 4 towers) | Model Number (4 towers) | Retracted Height |
|-------------------------------------|----------------------------|------------------|
| (kN) | | A (mm) |
| 600 | SL 60 | 2004 |
| 1250 | SL 125 | 2640 |
| 3000 | SL300 | 2705 |
| 4000 | SL 400 | 3166 |
| 5000 | SBL 500 | 3028 |
| 8976 | SBL 900 | 5004 |
| 10.484 | SBL 1100 | 4370 |
| 5000 | MBL 500 | 6098 |
| 6000 | MBL 600 | 6553 |

Telescopic Hydraulic Gantries



Hydraulic Gantries

Telescopic Hydraulic Gantries are a safe, efficient way to lift and position heavy loads in applications where traditional cranes will not fit and permanent overhead structures for job cranes are not an option.

Hydraulic Gantries are placed on skid tracks to provide a means for moving and placing heavy loads, many times with only one pick.

Enerpac offers three series of Hydraulic Gantry systems:

- **SL-Series Super Lift**

The cost-effective SL-Series Super Lift offer control and stability for everyday lifting applications below 4000 kN up to 9 metres

- **SBL-Series Super Boom Lift**

The heavy-duty SBL-Series Super Boom Lift boom style gantries offer increased lifting capacity of over 4000 kN to heights of almost 12,2 metres.

- **MBL-Series Mega Boom Lift**

The massive MBL-Series Mega Boom Lift offers capacities and lifting heights of over 6000 kN at almost 14,6 metres extreme lifting conditions.

All Enerpac gantries are delivered with specific properties and control systems to ensure optimum stability and safety.

SL, SBL, MBL Series



Capacity with 4 towers:

600 - 10.484 kN

Lift Height:

3,49 - 14,55 meters

▼ Optional Gantry Accessories

Contact Enerpac for assistance by email at enerpac.com/contact-us




Skid Tracks

Allows for easy levelling of the gantry tower and reduce ground bearing pressure, available in two standard lengths, 3 and 6 m.



Header Beams

Sold in pairs and includes lifting points and fork pockets for easy positioning on gantry towers. Available in standard lengths of 8, 10 and 12 meters




Powered Side Shift

Electric propulsion controlled by standard gantry controls. Each set consists of 4 units.



Lifting Anchors

Designed to transfer the load to the top of the header beam. Can accommodate a 250 ton shackle or attach directly to the lifted load.

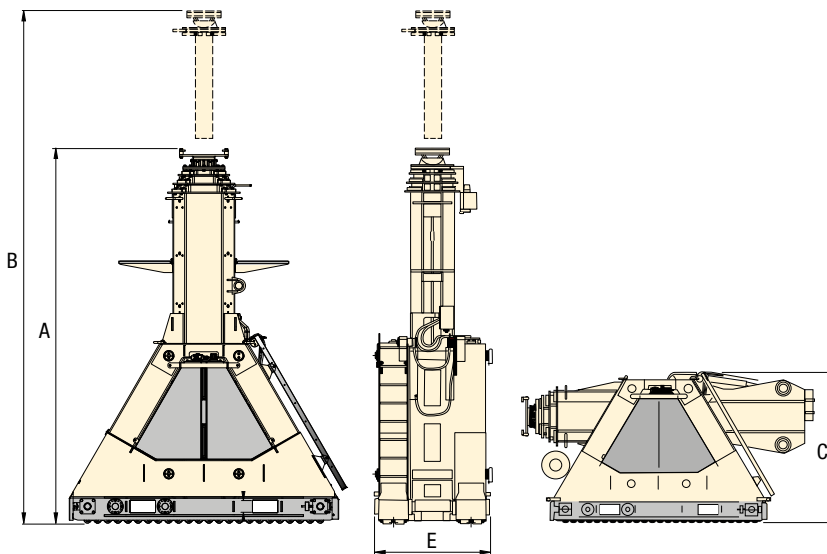

| Stage 1 | | Stage 2 ¹⁾ | | Stage 3 | | Transport Height | Skid Track Width | (kg) ²⁾ | Model Number (4 towers) |
|-------------|---------------|-----------------------|---------------|-------------|---------------|------------------|------------------|--------------------|-------------------------|
| Max. Height | Max. Capacity | Max. Height | Max. Capacity | Max. Height | Max. Capacity | | | | |
| B (mm) | (kN) | B (mm) | (kN) | B (mm) | (kN) | C (mm) | E (mm) | | |
| 3404 | 150 | 4704 | 150 | - | - | 2034 | 769 | 1050 | SL 60 |
| 4575 | 313 | 6640 | 313 | - | - | 2762 | 812 | 2130 | SL 125 |
| 4605 | 750 | 6700 | 500 | - | - | 2705 | 830 | 3250 | SL300 |
| 5224 | 1000 | 7232 | 1000 | 9140 | 460 | 3170 | 1218 | 4600 | SL 400 |
| 4998 | 1300 | 6908 | 1300 | 8618 | 750 | 3028 | 1218 | 6300 | SBL 500 |
| 8304 | 2244 | 11.304 | 1481 | - | - | 2243 | 1218 | 13.350 | SBL 900 |
| 7004 | 2621 | 9668 | 1699 | 12.002 | 945 | 2244 | 1218 | 11.950 | SBL 1100 |
| - | 1250 | 12.867 | 1250 | - | - | 2243 | 1682 | 19.750 | MBL 500 |
| - | 1500 | 14.552 | 1500 | - | - | 2525 | 1982 | 20.950 | MBL 600 |

¹⁾ MBL500 and MBL600 are two stage gantries; stages 1 and 2 extend simultaneously and provide full capacity at any height. ²⁾ Weight per tower

▼ Shown: HSK1250 Skidding System



HSK-Series, Skidding System

- PTFE skid pads with dimpled surface for low friction and long lifetime
- Easy to replace skid pads, no tools necessary
- Bi-directional operation using push-pull cylinders avoid the need to reposition cylinders for switching direction
- Large load support surface on the skid beams for distributing load
- Bottom of skid shoes equipped with stainless steel sliding plates.

LH-Series, Low-Height Skidding System

- 2-in-1 track design for added support
- Intuitive pump controls (SFP-Series Split-Flow Pump)
- Easily reversible to change skidding direction
- Portable design for quick setup
- 400 ton skidding capacity with two push-pull units.

▼ A custom hydraulic Low-Height Skidding System will provide the maintenance team with the ability to maneuver and transport transformers with physical access limitations.



The Ideal Jack and Slide Solution



Skidding Systems

The skidding system is comprised of a series of skid beams moved by hydraulic push-pull cylinders, travelling over a pre-constructed track.

A series of special PTFE coated pads are placed on the skid tracks. The PTFE surface is matched with a sliding plate under the Enerpac skid beams, designed to achieve minimum friction coefficients. The skid beams are connected by hoses to a hydraulic electric or diesel driven power pack.

In addition to our standard skidding systems, we have the capability to create customized skidding systems to meet your specific requirements.



Controls

Enerpac offers several options for controlling our skidding systems. Wireless Controls allows the operator the freedom to view

the skidding operation from multiple locations while providing complete control of all system functions.

Manual controls offer a cost-effective solution by utilizing manual hydraulic valves mounted directly on the skidding system power unit.

▼ HSKJ-2500 Skid Shoe Jack.





Skidding Systems

Enerpac Skidding Systems are available in several versions:

- **B-Series (Skid Beam)** utilizes a tall skid beam with built-in push-pull cylinders. Skidding direction can be easily switched by flipping a lever on the attached gripper box.
- **J-Series (Skid Jack)** provides the same functionality as the B-Series with the added benefit of having a built-in cylinder for lifting or leveling the load.

- **LH-Series (Low-Height)** includes low-height skid beams that can fit in tight spaces while still offering high capacity. We also offer a track support for added rigidity when the surface is not fully supported.

HSK LH Series



Capacity:


100 - 250 ton

Push/Pull Stroke:

600 mm


Lifting Stroke:

175 mm

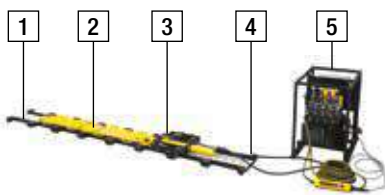

LH-Series Skidding System Requirements

- 1 Skid Track (required)
- 2 Skid Beam (required)
- 3 Push-Pull Cylinder Unit (required)
- 4 Hydraulic Hoses (required)
- 5 Split-Flow Electric Pump (required)
- 6 Track Support (optional, not shown)
- 7 Storage/Transport Frame (optional, not shown)
- 8 Pump Cart (optional, not shown)

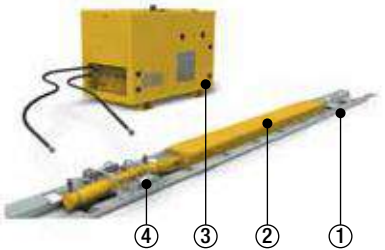

HSK-Series Skidding System Requirements

- ① Skid Track
- ② Skid Beam
- ③ Hydraulic Power Pack
- ④ Hydraulic Push-Pull Unit




Skid Tracks

Include specially constructed and easily replaceable PTFE coated pads. Skid track is sold separately.



Hydraulic Power Packs

Enerpac offers a comprehensive range of hydraulic power packs that are optimized for use with Skidding Systems.

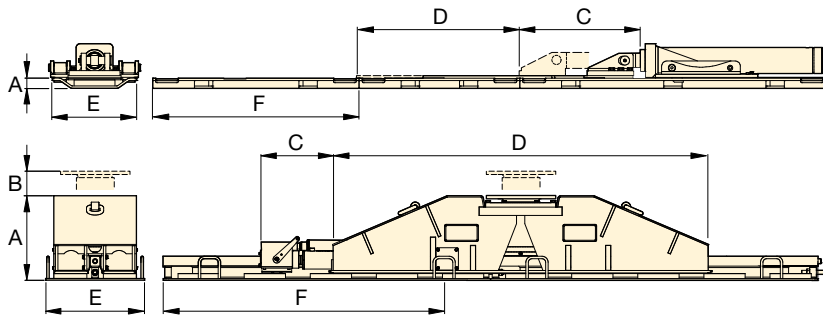

▼ Low-Height Skidding System assembly (LH400).



Skidding Systems


| Maximum Capacity (per beam) | Maximum Push-Pull Capacity ton (kN) | | Model Number | Skid Beam Height (with track) | Lifting Stroke | Push-Pull Stroke | Skid Beam Length | Skid Beam Weight | Skid Track Width | Skid Track Length | Skid Track Weight |
|-----------------------------|-------------------------------------|----------|--------------|-------------------------------|----------------|------------------|------------------|------------------|------------------|-------------------|-------------------|
| | ton (kN) | Push | | | | | | | | | |
| 100 (860) | 25 (255) | 11 (98) | LH400 | 92 | – | 600 | 1080 | 63 | 250 | 955 | 67 |
| 125 (1250) | 22 (220) | 16 (160) | HSKB1250 | 309 | – | 600 | 2500 | 740 | 400 | 1983 | 120 |
| 125 (1250) | 22 (220) | 16 (160) | HSKJ1250 | 502 | 175 | 600 | 1690 | 790 | 400 | 1983 | 120 |
| 200 (2000) | 25 (255) | 14 (141) | HSKLB2000 | 204 | – | 600 | 2902 | 340 | 540 | 1998 | 120 |
| 250 (2500) | 40 (400) | 26 (260) | HSKB2500 | 374 | – | 600 | 3000 | 1020 | 600 | 1946 | 290 |
| 250 (2500) | 40 (400) | 26 (260) | HSKJ2500 | 600 | 175 | 600 | 1784 | 1450 | 600 | 1946 | 290 |



SPMT, Self-Propelled Modular Transporter

▼ SPMT600-360 with MTPP-360 hydraulic power unit (HPU)

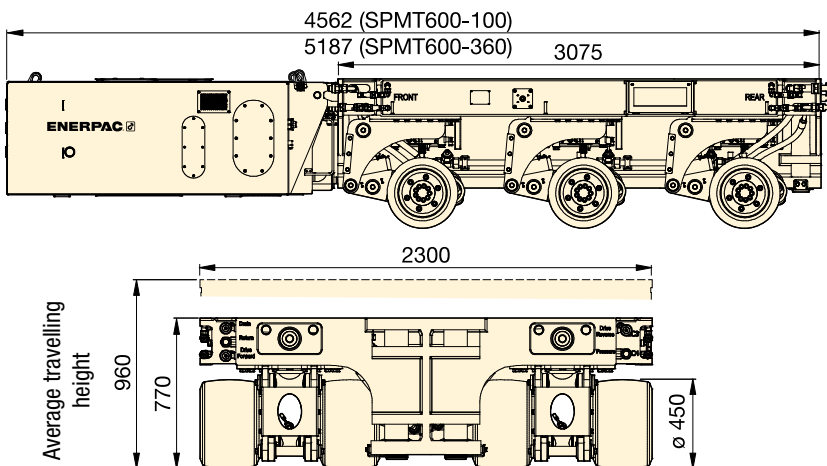

- Modular design for multiple configurations.
- Minimized height and slim design are ideal for in-plant operation
- Intelli-Drive wireless control system is intuitive and easy to use
- One power pack can operate 2-3 trailers maximum depending on model
- Two trailers and power pack can be shipped inside a 20 ft. container
- Hydraulic power unit is tier-4 diesel engine for reduced emissions.



| Capacity (per trailer) | Model Number | Maximum Configuration | Steering Range | Lifting Stroke |  HPU * |  Trailer |
|------------------------|--------------|-----------------------|----------------|----------------|-------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------|
| ton (kN) | | (trailer in rows) | (degrees) | (mm) | (kg) | (kg) |
| 60 (600) | SPMT600-100 | 4 x 2 | -50° - +50° | 384 | 2500 | 8000 |
| | SPMT600-360 | 6 x 2 | -179° - +179° | 384 | 2800 | 8300 |

* HPU = 54 kW Power Pack Diesel is sold separately.

SPMT Series

Capacity:

60 ton (600 kN)

Transport Speed (unloaded - loaded):

3 - 1,5 km/h

Motor Size:

54 kW



Self-Propelled Modular Transporter

The Enerpac Self-Propelled Modular Transporter (SPMT) features a minimized height and slim design, which makes it very easy to operate in confined spaces. Each wheel unit has a steering function as well as a lifting cylinder at its disposal. Two axles are driven, the centre axle is non-driven. Wheel propulsion is established by wheel drives.

The SPMT is operated by the Intelli-Drive Remote Controller. This remote controller can be used both hard wired and wireless (based on radio frequency).

The SPMT is a modular system and can be built up to a maximum configuration of six transporters in a row and two in the width. This is the maximum setup of units that can work together on just one Intelli-Drive Remote Controller.

The SPMT is a modular system comprised of trailers with 3 axle lines each and diesel hydraulic power units (HPU). Depending on the model number, the trailers and HPUs can be configured to a maximum of 4 trailers in 2 rows (4x2) or 6 trailers in 2 rows (6x2).

▼ Turbine rotor transport.



Custom Heavy Lifting Solutions

When your application requires something other than our standard product offering, look to Enerpac Heavy Lifting Technology, Experience and Expertise.

Our group of engineers, designers and specialist, will work with you to understand your specific application and provide a turn-key solution that will exceed your expectations.



STEEL FABRICATION

Enerpac has a dedicated facility for steel fabrication and welding. We design and manufacture custom structures used in demanding heavy-lifting applications.



ENGINEERING

Enerpac has a multi-disciplined engineering team capable of design and development of all aspects of an Heavy Lifting system. Leveraging design and application experience with the latest in computer software, rapid prototyping and analysis methods ensures delivery of the highest quality systems.



ELECTRONICS

Enerpac designs all control systems in-house. This capability keeps control technology close to the design engineers who are developing the rest of the system. In doing so, we can tailor the control system to match unique project requirements.



MACHINING

Enerpac utilizes the latest in CNC machining technologies and manufactures all large and special hydraulic cylinders in-house. We can machine diameters up to 1000 mm with lengths to 6000 mm.



FIELD SUPPORT

Enerpac Heavy Lifting Technology is available to provide on-site support including training and troubleshooting of systems. We also stock repair parts and consumable items at several locations to ensure fast delivery and minimal downtime.



HYDRAULIC POWER UNITS

Enerpac designs, assembles and tests small to large hydraulic power units in-house. Power units range from 0,5 to 240 kW and are tested with the system they are intended to operate.



MAINTENANCE and REPAIR

Due to the unique nature of Enerpac Heavy Lifting Technology, we offer complete maintenance and repair services. Our M&R group is available to assist customers who do not have access to local service facilities qualified to work on these systems.



OFFSHORE GANTRY CRANE

The Enerpac Over Head Travel Crane (OHTC) comprises two pairs of lifting beams, with an overall width of 30m, and a lifting capacity of 4800 ton for lifting, moving and lowering the concrete blocks for the offshore highway.



STRAND JACK GANTRY

The strand jack gantry is a steel structure to facilitate erection and skidding back, forth and sideways of heavy loads. The Enerpac strand jack gantry can be used with either skidding systems or hydraulic gantries on top.



TRAVEL GANTRY

The travel gantry combines the safety and efficiency of a hydraulic gantry with the ease of use of SPMT (self-propelled modular transporter) technology. With a lifting capacity of 67 ton, the travel gantry sets a new standard in equipment and container handling.



BRIDGE LAUNCHING SYSTEMS

Spindle Bar System: group of in-line hollow plunger cylinders. The hollow plungers allow the steel bars to be inserted through the cylinders, which are used for pushing, pulling and braking. **Enerpac Enerlauncher** is an automatic and synchronous incremental hydraulic tandem launching system with a 800 ton lifting section and an 300 ton push/pull section.



JACK-UP SYSTEMS

The jack-up system is a custom developed multipoint lifting system – synchronically lift and mechanically hold. A typical system setup includes four jack-up units positioned under each corner of a load.



ROTOR REMOVAL AND INSTALLATION SYSTEM

The generator rotor removal and installation system is a custom developed product for removing and installing the rotor (field) in a power plant's generator. The system is designed to comply with the varying dimensions and challenging accessibility of a plant's generator.



CUSTOM HYDRAULIC PRESSES

Our hydraulic presses can be configured to fulfill a broad range of applications. Each press is designed and manufactured according to customer specifications and in cooperation with our engineering team.



SELF-ERECTING TOWER

The Enerpac Self Erecting Tower (ESET) is a self-erecting tower lift system that enables you to build a free standing gantry from ground level. The ESET can be supplied in various capacities and lifting heights and is built with standard modular components, enabling a flexible solution to future project demands.



LAS VEGAS WHEEL

Our expertise has been acknowledged by the world's leading industrial professionals and has contributed to the successful movement of a number of the most recognizable structures on earth. At the time of construction the Las Vegas High Roller was the largest observation wheel in the world. A custom hydraulic drive system was developed to propel the wheel for daily use and was also used to construct the wheel in sections.



Enerpac 'Yellow Pages' stand for Hydraulic Information!

If selecting hydraulic equipment is not your daily routine, then you will appreciate these pages. The 'Yellow Pages' are designed to help you work with hydraulics. They will help you to better understand the basics of hydraulics, of system set-ups and of the most commonly used hydraulic techniques. The better your choice of equipment, the better you will appreciate hydraulics. Take the time to go through these 'Yellow Pages' and you will benefit even more from Enerpac High Pressure Hydraulics.

| Section | | Page |
|-------------------------------------------------|--|----------------|
| Safety Instructions | | 264-265 ▶ |
| Pump Selection Selection Worksheet | | 266 ▶ 267 ▶ |
| Basic System Set-ups | | 268-269 ▶ |
| Basic Hydraulics | | 270-271 ▶ |
| Conversion Tables Cylinder Speed Charts | | 272 ▶ 273 ▶ |
| Valve Information Hexagon Bolt and Nut Sizes | | 274 ▶ 275 ▶ |
| Torque Tightening | | 276-277 ▶ |



ENERPAC WARRANTY STATEMENT

Visit our web site for the complete Global Lifetime Warranty or call your Authorized Service Center.



Enerpac is certified for several quality standards. These standards require compliance with standards for management, administration, product development and manufacturing. Enerpac worked hard to earn the quality rating ISO 9001, in its ongoing pursuit of excellence.

ISO 1402, ISO 4672, ISO 6803

Enerpac thermoplastic hoses are related to the criteria set forth in these standards.



ATEX 95 Certified

The ATP, ZA and XA-Series air pumps and S and W-Series torque wrenches are tested and certified according to the Directive 2014/34/EU "ATEX Directive".

The explosion protection is for equipment group II, equipment category 2 (hazardous zone area 1), in gas and/or dust atmospheres. ATP, ZA and XA-Series air pumps are marked: Ex II 2 GD ck T4.

Product Design Criteria

All hydraulic components are designed and tested to be safe for use at maximum 700 bar (10.000 psi) pressure unless otherwise specifically noted.



Where specified, Enerpac electric power units meet the design, assembly and test requirements of the Standards Council of Canada (CAN C22.2 No. 68-92), and UL73 for the United States. Units were tested and certified for both USA and Canada by TÜV and by CSA, national recognized testing laboratories.

EMC Directive

Where specified, Enerpac electric power pumps meet the requirements for Electromagnetic Compatibility per EMC Directive 2004/108/EC.



CE Marking & Conformity

Enerpac provides a Declaration of Conformity and CE marking for products that conform with the European Community Directives.

ASME B30.1-2015

Our cylinders fully comply with the criteria set forth by the American National Standards Institute (except RD and BRD-Series).



Safety Instructions



When used correctly, hydraulic power is one of the safest methods of applying force to your work. And to that end we offer some DO's and

DON'Ts, simple common sense points which apply to practically all Enerpac hydraulic products.

- Lift slowly and check the load often
- Avoid standing in the line of force
- Anticipate possible problems and take steps to avoid them.

The line drawings and application photo's of Enerpac products throughout this catalog are used to portray how some of our customers have used hydraulics in industry.

In designing similar systems, care must be taken to select the proper components that provide safe operation and fit your needs.



Check to see if all safety measures have been taken to avoid the risk of injury and property damage from your application or system.

Enerpac can not be held responsible for damage or injury, caused by unsafe use, maintenance or application of its products.



Please contact the Enerpac office or a representative for guidance when you are in doubt as to the proper safety precautions to be taken in designing and setting up your particular system.

In addition to these tips, every Enerpac product comes with instructions spelling out specific safety information. Please read them carefully.

Jacks





Provide a level and solid support for the entire jack base area.



The entire jack saddle must be in contact with the load. Movement of the load to be in the same direction as jack plunger.





Never place any part of your body under the load. Ensure the load is on a solid support before venturing under.





Remove the jack handle when it is not being used.



Cylinders




Provide a solid support for the entire cylinder base area. Use cylinder base attachment for more stability.



Both couplers must be connected when using double-acting cylinders. Ensure return hose is fitted.





Do not use cylinder without saddle. This will cause plunger to "mushroom". Saddles distribute load evenly on the plunger.



As with jacks, never place any part of your body under the load. Load must be on cribbing before venturing under.



Always protect cylinder threads for use with attachments.




Keep hydraulic equipment away from open fire and temperatures above 65 °C (150 °F).





General

80% Manufacturer's rating of load and stroke are maximum safe limits. **80%** Good practice encourages using only 80% of these ratings!


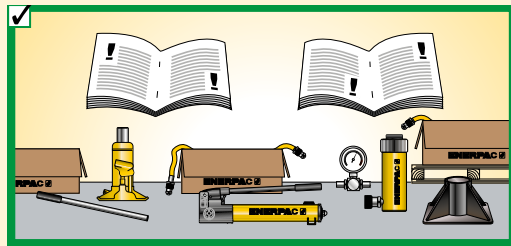


Always read instructions and safety warnings that come with your Enerpac hydraulic equipment.





Don't override the factory setting of relief valves. Always use a gauge to check system pressure.



Pumps





Don't use handle extenders. Hand pumps should be easy to operate when used correctly.



Close release valve finger tight. Using force will ruin the valve.





Fill pump only to recommended level. Fill only when connected cylinder is fully retracted.





Use only genuine Enerpac hydraulic oil. Wrong fluid can destroy seals and pump and will render your warranty null and void your guarantee.



Hoses and couplers





Clean both coupler parts before connecting. Use dust caps when coupler parts are not connected.





Detach cylinder only when fully retracted or use shut-off valves or safety valves to lock-in cylinder pressure.





Keep hoses away from the area beneath loads.



Don't kink hoses. Bending radius should be at least 115 millimetres. Don't drive over or drop heavy objects on hoses.







Don't lift hydraulic equipment by the hoses.



Never allow the cylinder to be lifted off of the ground through the couplers.









▼ HAND PUMP AND SINGLE-ACTING CYLINDER MATCHING CHART

| Capacity (ton) ▶ ▼ Stroke | 5 t | 10 t | 15 t | 25 t | 30 t | 50 t | 60 t | 75 t | 100 t | 150 t |
|------------------------------------------------------------------------------------|------------------------------------------------------------------------------------|--------------|------|------------------------------------------------------------------------------------|-------------|-------------------------------------------------------------------------------------|--------------|------|-------|-------|
| < 25 mm | | | | | | | | | | |
| 25 mm | | | | | | | | | | |
| 50 mm | | | | | | | | | | |
| 75 mm | | | | | | | | | | |
| 100 mm | | | | | | | | | | |
| 125 mm | | | | | | | | | | |
| 150 mm | | | | | | | | | | |
| 175 mm | | | | | | | | | | |
| 200 mm | | | | | | | | | | |
| 225 mm | | | | | | | | | | |
| 250 mm | | | | | | | | | | |
| 300 mm | | | | | | | | | | |
| 325 mm | | | | | | | | | | |
| 350 mm | | | | | | | | | | |
|  |  | P-392 | |  | P-80 |  | P-462 | | | |
| | | Page: 72 | | | Page: 74 | | Page: 74 | | | |

Note: Selection based on oil capacity requirements of cylinders.

▼ POWER PUMP SELECTION CHART

| Oil Flow * | Low (0,1 - 0,3 l/min) | | Medium (0,5 - 2,0 l/min) | | High (2,0 - 4,2 l/min) | |
|---------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| Usable Oil Capacity | 1,9 - 3,8 litres | 5,7 litres | 4 - 40 litres | 4 - 40 litres | 10 - 40 litres | 20 - 150 litres |
| Duty Cycle ** | Intermittent | Extended | Intermittent | Extended | Extended | Extended |
| Portability *** | Portable | Stationary | Portable | Stationary | Stationary | Stationary |
| Recommended Series | PU-Series Economy | PE-Series Submerged | ZU4-Series | ZE3-, ZE4- and ZE5-Series | ZE6-Series | SFP-Series |
| |  |  |  |  |  |  |
| | Page: 84 | Page: 86 | Page: 92 | Page: 98 | Page: 98 | Page: 240 |

* Oil Flow

- Determined by motor size
- Directly affects electrical power requirements
- Determines cylinder or tool speed

** Duty Cycle

- Extended applications require more than one hour of uninterrupted pump use
- Intermittent would be used less than one hour, depending on reservoir capacity.

*** Portability

- | | |
|-------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------|
| <p>Portable</p> <ul style="list-style-type: none"> • Ergonomic handles • Flexible power requirements | <p>Stationary</p> <ul style="list-style-type: none"> • Mounting options • Normally requires stable power |
|-------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------|



▼ Complete the following information to select the right products:

| Cylinder Selection | Question: | Tips/help | Data | Model Number |
|---------------------------------|------------------------------------------|--------------------------------------------------------------------|-------------------------------------------|-------------------------------------------|
| | Total force required (ton): | Total load | <input style="width: 100%;" type="text"/> | |
| | Number of cylinders required: | Number of lifting points | <input style="width: 100%;" type="text"/> | |
| | Force per cylinder (ton): | Should be 80% of total cylinder capacity | <input style="width: 100%;" type="text"/> | |
| | Stroke required: | Plunger travel | <input style="width: 100%;" type="text"/> | |
| | Single or double-acting (D/A): | D/A used when pull force is required, or retract speed is critical | <input style="width: 100%;" type="text"/> | |
| | Type of plunger required: | Hollow or solid | <input style="width: 100%;" type="text"/> | |
| | Collapsed height required: | | <input style="width: 100%;" type="text"/> | |
| | Optional saddle required: | Tilt, Grooved, Flat | <input style="width: 100%;" type="text"/> | |
| | Cylinder base: | Improves stability | <input style="width: 100%;" type="text"/> | |
| | Cylinder attachments: (RC-series) | Expanded functions | <input style="width: 100%;" type="text"/> | |
| Selected cylinder model: | | | ▶ | <input style="width: 100%;" type="text"/> |
| Including coupler model: | | | <input style="width: 100%;" type="text"/> | |

Pump Selection

The three most commonly selected pumps are hand pumps, electric pumps and air-driven pumps. Gas powered pumps, however can be selected in the same way.

Available power source: Manual Battery Electric Compressed Air Petrol

| | | |
|-------------------------------------------|------------------------------------------------------------|-------------------------------------------|
| Hand Pump | Not for high cycle applications | <input style="width: 100%;" type="text"/> |
| Single- or double-acting operation | Use 4-way valve for D/A applications | <input style="width: 100%;" type="text"/> |
| | Check speed chart on page 273 for number of mm per stroke) | |

| | | |
|----------------------------|---|-------------------------------------------|
| Selected Hand Pump: | ▶ | <input style="width: 100%;" type="text"/> |
|----------------------------|---|-------------------------------------------|

| | | |
|-------------------------------------------------|--------------------------------------------------------------------|-------------------------------------------|
| Electric or Compressed Air Pump | | |
| Need for portability: | | |
| Duty cycle: | Intermittent or extended | <input style="width: 100%;" type="text"/> |
| Required useable oil capacity: | Intermittent = 1,2 x oil capacity high cycle = 2 x oil capacity | <input style="width: 100%;" type="text"/> |
| Available Voltage: | | <input style="width: 100%;" type="text"/> |
| Lifting speed (Important/not important): | Use speed chart on page 273 | <input style="width: 100%;" type="text"/> |
| Type of control: | Manual / remote pendant | <input style="width: 100%;" type="text"/> |
| Type of actuation/function: | Advance / Hold / Retract | <input style="width: 100%;" type="text"/> |
| Accessories: | Filter Kit, Level Switch, Roll Bar ... | <input style="width: 100%;" type="text"/> |

| | | |
|-----------------------|---|-------------------------------------------|
| Selected Pump: | ▶ | <input style="width: 100%;" type="text"/> |
|-----------------------|---|-------------------------------------------|

| | | |
|---------------------------|----------------|-------------------------------------------|
| Including Coupler: | Oil connection | <input style="width: 100%;" type="text"/> |
|---------------------------|----------------|-------------------------------------------|

System Components

| | |
|---------------------------------------------|-------------------------------------------|
| Number of hoses and length required: | <input style="width: 100%;" type="text"/> |
|---------------------------------------------|-------------------------------------------|

| | | |
|------------------------|---|-------------------------------------------|
| Selected Hoses: | ▶ | <input style="width: 100%;" type="text"/> |
|------------------------|---|-------------------------------------------|

| | | |
|--------------------------------------|---|-------------------------------------------|
| Manifold or Tee-fitting: | ▶ | <input style="width: 100%;" type="text"/> |
| Extra hose per manifold (2): | ▶ | <input style="width: 100%;" type="text"/> |
| Gauge (kN or bar scale): | ▶ | <input style="width: 100%;" type="text"/> |
| Gauge Adapter: | ▶ | <input style="width: 100%;" type="text"/> |
| Fittings: | ▶ | <input style="width: 100%;" type="text"/> |
| Pressure Relief Safety Valve: | ▶ | <input style="width: 100%;" type="text"/> |
| Load-holding Valve(s): | ▶ | <input style="width: 100%;" type="text"/> |
| Hydraulic Oil: | ▶ | <input style="width: 100%;" type="text"/> |



1 Cylinder
Applies hydraulic force.
Page 5

2 Cylinder Base Plate
For applications like lifting where additional cylinder stability is required.
Page 10

3 Pump
Provides hydraulic flow.
Page 71

4 Hose
Transports hydraulic fluid.
Page 122-123

5 Male Coupler
For quick connection of the hose to system components.
Page 124-125

6 Female Coupler
For quick connection of the hose end to the system components.
Page 124-125

7 Gauge
To monitor pressure of the hydraulic circuit.
Page 128-134

8 Gauge Adaptor
For quick and easy gauge installation.
Page 134-135

9 Swivel Connector
Allows proper alignment of valves and/or gauges. Used when units being connected cannot be rotated.
Page 135


10 Auto-Damper Valve V-10
Used to protect gauge from damage due to sudden pressure pulses in the system. Needs no adjustment and allows correct positioning of gauge, prior to tightening.
Page 136-137

11 4-Way Directional Control Valve
Controls the direction of hydraulic fluid in a double-acting system.
Page 116-117


Single-acting push application, such as in a press.

The hand pump offers controlled cylinder advance, but may require many hand pump strokes in longer stroke applications when the cylinder capacity is 25 ton or above.


Examples of pump, hose and cylinder sets can be found on pages 58-61.

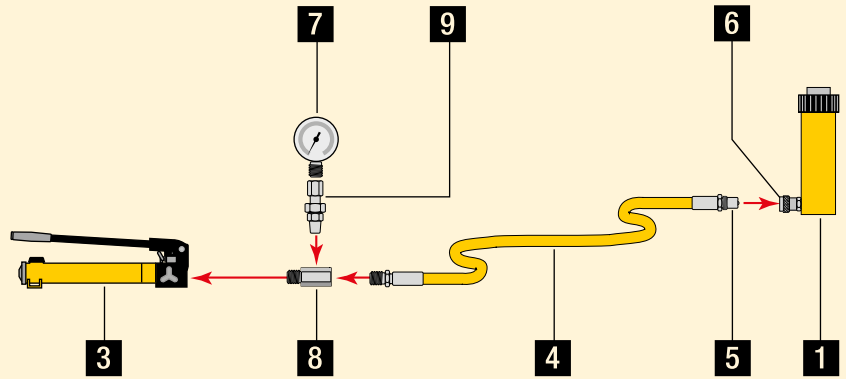

Single-acting cylinder with longer stroke used for lifting applications.

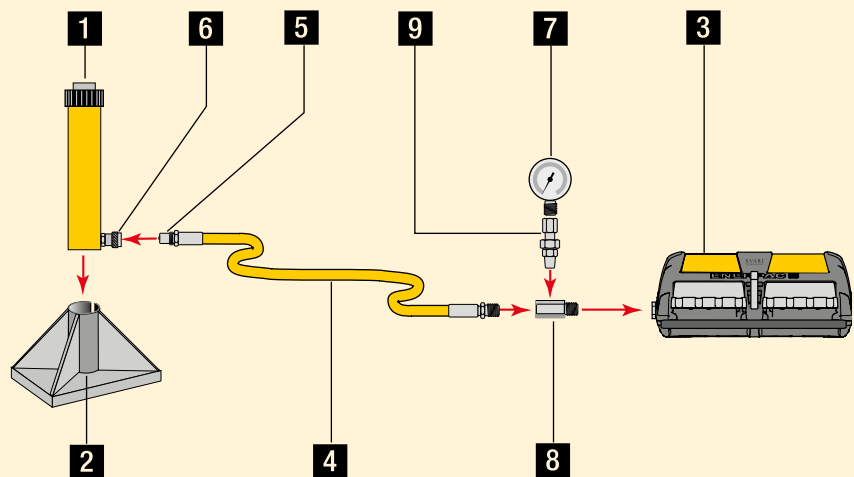


Double-acting cylinder set-up used for lifting applications where a slow controlled descent of the load must be maintained.

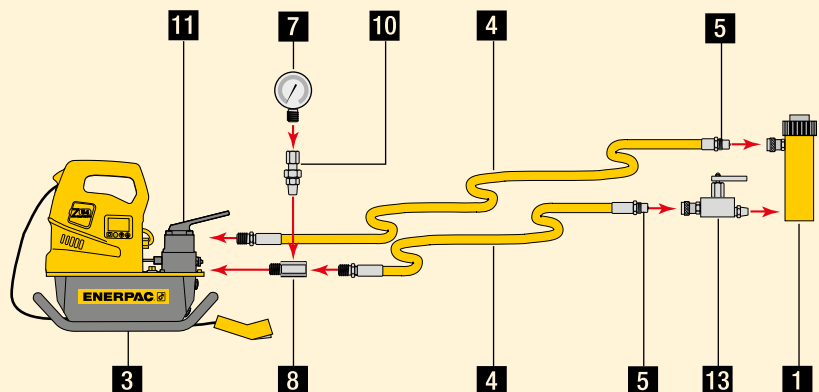



Double-acting cylinder set-up used in a push/pull application.

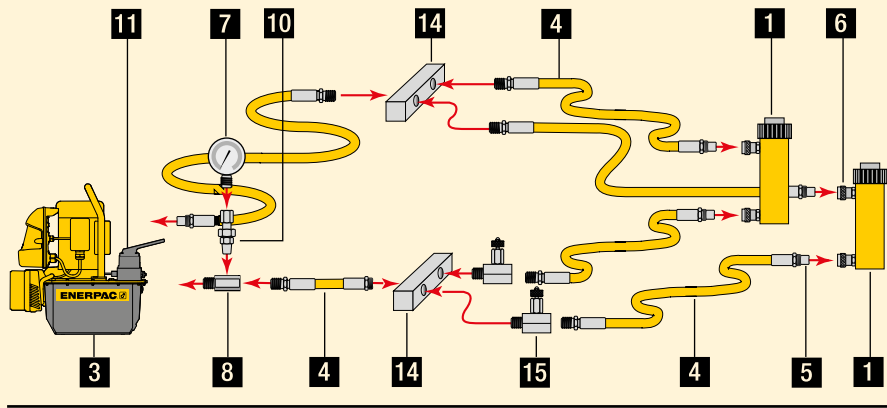


12 3-Way Directional Control Valve
Controls the direction of hydraulic fluid in a single-acting system.
Page 116-117

13 Safety Holding Valve
Controls load descent in lifting applications.
Page 136-137


14 Manifold
Allows distribution of hydraulic fluid from one power source to several cylinders.
Page 126

15 Needle valve
Regulates the flow of hydraulic fluid to or from the cylinders.
Page 136-137

Two point lifting set-up using single-acting cylinders.

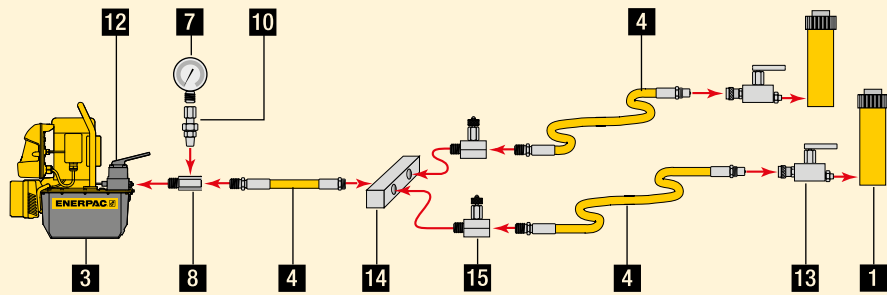

Four point lifting set-up, using single-acting cylinders and directional control valves.

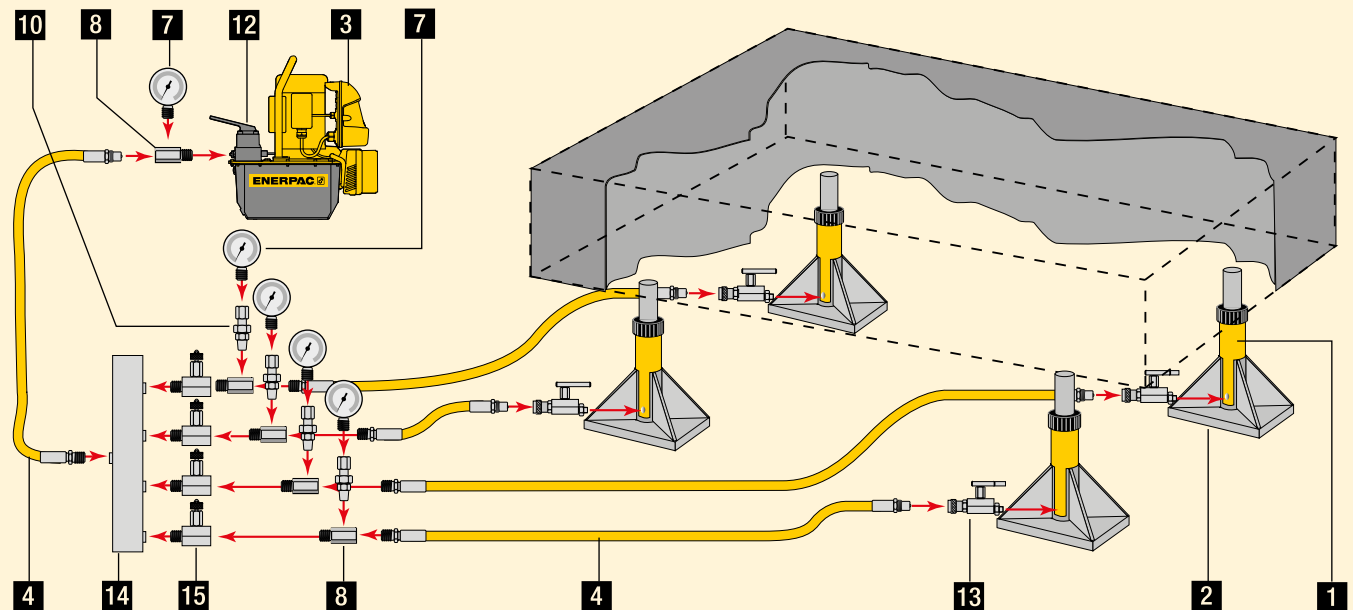


www.enerpac.com
Visit our web site to learn more about hydraulics and system set-ups.




Flow

A hydraulic pump produces flow.



Pressure

Pressure occurs when there is resistance to flow.

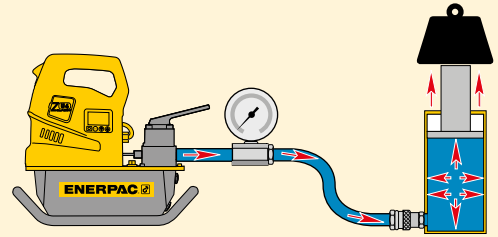

Pascal's Law

Pressure applied at any point upon a confined liquid is transmitted undiminished in all directions (Fig.1). This means that when more than one hydraulic cylinder is being used, each cylinder will lift at its own rate, depending on the force required to move the load at that point (Fig. 2).

Cylinders with the lightest load will move first, and cylinders with the heaviest load will move last (Load A), as long as the cylinders have the same capacity.





Figure 1

To have all cylinders operate uniformly so that the load is being lifted at the same rate at each point, either control valves (see Valve section) or Synchronous Lift System components (see section Heavy Lifting Technology) must be added to the system (Load B).

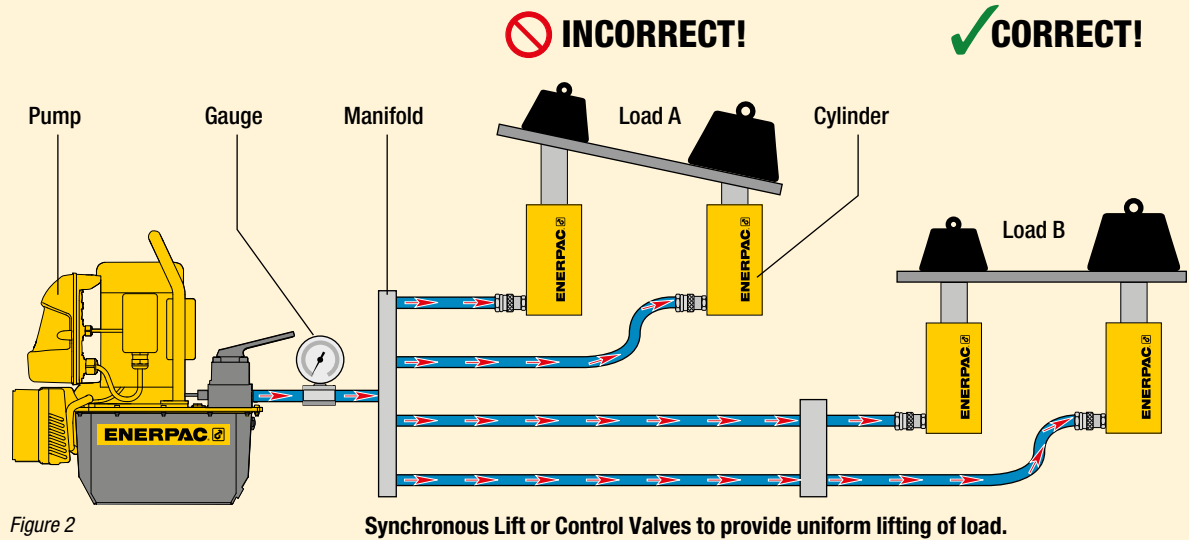

CAUTION!
When lifting or pressing, always use a gauge.

A gauge is your 'window' to the system. It lets you see what's going on. You will find the gauges in the System Components section.




Learn more about hydraulics

Visit www.enerpac.com to learn more about hydraulics and system set-ups.



Force

The amount of force a hydraulic cylinder can generate is equal to the hydraulic pressure times the “effective area” of the cylinder (see cylinder selection charts).



| | | | | |
|--------------|---|-----------------------------------|---|--------------------------------|
| Force | = | Hydraulic Working Pressure | x | Cylinder Effective Area |
| F | = | P | x | A |

Use this formula to determine either force, pressure or effective area if two of the variables are known.

Example 1

An RC-106 cylinder with 14,5 cm² effective area operating at 700 bar will generate what force?

$$\text{Force} = 7000 \text{ N/cm}^2 \times 14,5 \text{ cm}^2 = 101500 \text{ N} = 101,5 \text{ kN}$$

Example 2

An RC-106 cylinder lifting 7000 kg will require what pressure?

$$\text{Pressure} = 7000 \times 9,8 \text{ N} \div 14,5 \text{ cm}^2 = 4731,0 \text{ N/cm}^2 = 473 \text{ bar.}$$

Example 3

An RC-256 cylinder is required to produce a force of 190.000 N. What pressure is required?

$$\text{Pressure} = 190.000 \text{ N} \div 33,2 \text{ cm}^2 = 5722,9 \text{ N/cm}^2 = 572 \text{ bar.}$$

Example 4

Four RC-308 cylinders are required to produce a force of 800.000 N. What pressure is required?

$$\text{Pressure} = 800.000 \text{ N} \div (4 \times 42,1 \text{ cm}^2) = 4750,6 \text{ N/cm}^2 = 476 \text{ bar.}$$

Remember, since four cylinders are used together, the area for one cylinder must be multiplied by the number of cylinders used.

Example 5

A HCL-2506 cylinder is going to be used with a power source that is capable of 500 bar. What is the theoretical force available from that cylinder?

$$\text{Force} = 5000 \text{ N/cm}^2 \times 363,1 \text{ cm}^2 = 1.815.500 \text{ N} = 1815 \text{ kN.}$$

Cylinder Oil Capacity

The volume of oil required for a cylinder (cylinder oil capacity) is equal to the effective area of the cylinder times the stroke*.

| | | | | |
|------------------------------|---|--------------------------------|---|------------------------|
| Cylinder Oil Capacity | = | Cylinder Effective Area | x | Cylinder Stroke |
|------------------------------|---|--------------------------------|---|------------------------|

* Note: these are theoretical examples and do not take into account the compressibility of oil under high pressure.

Example 1:

An RC-158 cylinder with 20,3 cm² effective area and 200 mm stroke requires what volume of oil?

$$\text{Oil Capacity} = 20,3 \text{ cm}^2 \times 20 \text{ cm} = 406 \text{ cm}^3$$

Example 2:

An RC-5013 cylinder has an effective area of 71,2 cm² and a stroke of 320 mm. How much oil will be required?

$$\text{Oil Capacity} = 71,2 \text{ cm}^2 \times 32 \text{ cm} = 2278,4 \text{ cm}^3$$

Example 3:

An RC-10010 cylinder has an effective area of 133,3 cm² and a stroke of 260 mm. How much oil will it require?


$$\text{Oil Capacity} = 133,3 \text{ cm}^2 \times 26 \text{ cm} = 3466 \text{ cm}^3$$

Example 4:

Four RC-308 cylinders are being used, each with an effective area of 42,1 cm² and a stroke of 209 mm. How much oil will be required?

$$\text{Oil Capacity} = 42,1 \text{ cm}^2 \times 20,9 \text{ cm} = 880 \text{ cm}^3 \text{ for one cylinder}$$

Multiply by four to obtain the required capacity: 3520 cm³



CAUTION!

Enerpac oil will compress 2,28% at 350 bar and 4,1% at 700 bar.





Conversion Tables

Key to cylinder dimensions

Dimensions shown in the Selection Charts of the cylinder section are identified on the relevant drawings by the capital letter references listed here: A for collapsed height through Z1 for depth of internal base thread.

- | | |
|-------------------------------------------------|---------------------------------------|
| A = Collapsed height | L = Plunger centre to side of base |
| B = Extended height | M = Mounting holes to plunger centre |
| C = Cylinder body length | N = Length of smaller cylinder part |
| D = Cylinder outside diameter | O = Plunger hole or thread of saddle |
| D1 = Cylinder width | P = Plunger thread length |
| E = Cylinder inside diameter | Q = Plunger outside thread |
| F = Plunger rod diameter | U = Pitch (BC) of mounting holes |
| G = Oil inlet thread | V = Thread of cylinder mounting holes |
| H = Cylinder bottom to advance port | W = Collar thread |
| I = Cylinder top to retract port | X = Collar thread length |
| J = Saddle outside diameter | Y = Centre hole diameter |
| K = Cylinder rod protrusion at collapsed height | Z = Internal base thread |
| | Z1 = Depth of internal base thread |

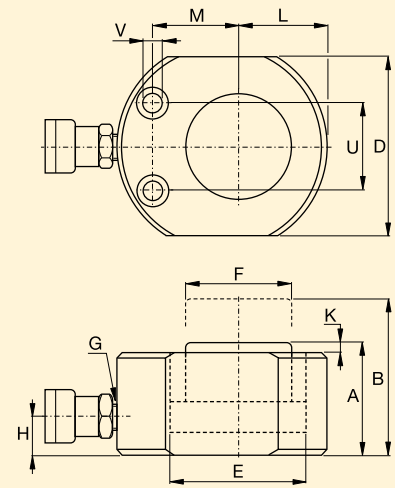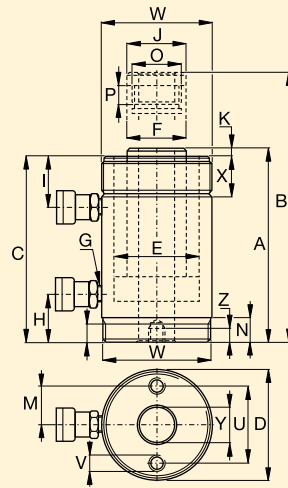

Key to measurements

All capacities and measurements in the catalogue are expressed in uniform values.

The conversion chart provides helpful information for their translation into equivalent systems.

All ton values specified in this catalogue are metric tonnes and are for cylinder class identification only.

Please refer to the kN data for calculations.

Free Conversion Calculator

Visit enerpac.com and download the free conversion calculator.

Pressure:

- | | |
|-------|-------------------------|
| 1 psi | = 0,069 bar |
| 1 bar | = 14,50 psi |
| | = 9,8 N/cm ² |
| | = 100.000 Pa |
| 1 kPa | = 0,145 psi |
| 1 MPa | = 145 psi |

Volume:

- | | |
|-------------------|--------------------------|
| 1 in ³ | = 16,387 cm ³ |
| 1 cm ³ | = 0,061 in ³ |
| 1 litre | = 61,02 in ³ |
| | = 0,264 gal |
| 1 USgal | = 3785 cm ³ |
| | = 3,785 l |
| | = 231 in ³ |

Weight:

- | | |
|---------------|-------------|
| 1 pound (lb) | = 0,4536 kg |
| 1 kg | = 2,205 lbs |
| | = 9,806 N |
| 1 metric ton | = 2205 lbs |
| | = 1000 kg |
| 1 ton (short) | = 2000 lbs |
| | = 907,18 kg |

Torque:

- | | |
|----------|----------------|
| 1 Nm | = 0,738 Ft.lbs |
| | = 0,102 kgf.m |
| 1 Ft.lbs | = 1,356 Nm |
| | = 0,138 kgf.m |

Temperature:

To Convert °C to °F:
 $T^{\circ F} = (T_{\circ C} \times 1,8) + 32$

To Convert °F to °C:
 $T^{\circ C} = (T_{\circ F} - 32) \div 1,8$

Other measurements:

- | | |
|-------------------|-------------------------|
| 1 in | = 25,4 mm |
| 1 mm | = 0,039 in |
| 1 in ² | = 6,452 cm ² |
| 1 cm ² | = 0,155 in ² |
| 1 hp | = 0,746 kW |
| 1 kW | = 1,359 hp |
| 1 kN | = 225 lbs |

Imperial to metric

| Inches | Decimal | mm |
|--------|---------|-------|
| 1/16 | .06 | 1,59 |
| 1/8 | .13 | 3,18 |
| 3/16 | .19 | 4,76 |
| 1/4 | .25 | 6,35 |
| 5/16 | .31 | 7,94 |
| 3/8 | .38 | 9,53 |
| 7/16 | .44 | 11,11 |
| 1/2 | .50 | 12,70 |
| 9/16 | .56 | 14,29 |
| 5/8 | .63 | 15,88 |
| 11/16 | .69 | 17,46 |
| 3/4 | .75 | 19,05 |
| 13/16 | .81 | 20,64 |
| 7/8 | .88 | 22,23 |
| 15/16 | .94 | 23,81 |
| 1 | 1.00 | 25,40 |

Cylinder Speed Charts



Cylinder Speed

This chart will help you calculate the time required for an Enerpac cylinder to lift a load when powered by a 700 bar Enerpac hydraulic pump.

The Cylinder Speed Chart can also be used to determine the pump type and model best suited for an application when you know the plunger speed required.

To determine: Cylinder plunger speed

An RC-256 cylinder (25 ton) is powered by a ZE3-Series two stage pump. While lifting the load, the cylinder plunger travels at 2,8 mm per second. While extending towards the load, the cylinder plunger travels at 30,9 mm per second.

To determine: Best matching pump

Your 25 ton cylinder needs to move a load at a speed of 3,0 mm per second. Simply go down from the top of the chart, to the value of 2,8 mm per second. Follow the chart to the right to find that the ZE3-Series pump is most suitable for your application.

Millimetres of RC-Series cylinder plunger travel per hand pump plunger stroke

| Cyl. Capacity ▶ | 5 ton | | 10 ton | | 15 ton | | 25 ton | | 30 ton | | 50 ton | | 75 ton | | 100 ton | | Pump Type | Page: |
|-----------------|---------|------|---------|------|---------|------|---------|------|---------|------|---------|------|---------|------|---------|------|-----------------------|-----------|
| | No Load | Load | No Load | Load | No Load | Load | No Load | Load | No Load | Load | No Load | Load | No Load | Load | No Load | Load | | |
| ▼ Power Source | | | | | | | | | | | | | | | | | | |
| Manual | 1,4 | 1,4 | 0,6 | 0,6 | 0,4 | 0,4 | 0,3 | 0,3 | 0,2 | 0,2 | 0,1 | 0,1 | 0,1 | 0,1 | 0,1 | 0,1 | P-141 | 72 |
| | 3,9 | 3,9 | 1,7 | 1,7 | 1,2 | 1,2 | 0,7 | 0,7 | 0,6 | 0,6 | 0,3 | 0,3 | 0,2 | 0,2 | 0,2 | 0,2 | P-391 | 72 |
| | 17,6 | 3,9 | 7,8 | 1,7 | 5,5 | 1,2 | 3,4 | 0,7 | 2,6 | 0,6 | 1,6 | 0,3 | 1,0 | 0,2 | 0,8 | 0,2 | P-392 | 72 |
| | 25,3 | 3,8 | 11,2 | 1,7 | 7,9 | 1,2 | 4,9 | 0,7 | 3,7 | 0,6 | 2,3 | 0,3 | 1,5 | 0,2 | 1,1 | 0,2 | P-77/80/801/84 | 74 |
| | 61,4 | 3,9 | 27,1 | 1,7 | 19,3 | 1,2 | 11,8 | 0,7 | 9,0 | 0,6 | 5,5 | 0,3 | 3,5 | 0,2 | 2,8 | 0,2 | P-802/842 | 74 |
| | 197 | 7,4 | 87,1 | 3,3 | 61,8 | 2,3 | 37,9 | 1,4 | 29,0 | 1,1 | 17,7 | 0,7 | 11,4 | 0,4 | 8,8 | 0,3 | P-462/464 | 74 |

Millimetres per Second of RC-Series Cylinder Plunger Travel

| Cyl. Capacity ▶ | 5 ton | | 10 ton | | 15 ton | | 25 ton | | 30 ton | | 50 ton | | 75 ton | | 100 ton | | Pump Type | Page: |
|-----------------------------------------------|---------|------|---------|------|---------|------|---------|------|---------|------|---------|------|---------|------|---------|------|--------------------------------|---------------|
| | No Load | Load | No Load | Load | No Load | Load | No Load | Load | No Load | Load | No Load | Load | No Load | Load | No Load | Load | | |
| ▼ Power Source | | | | | | | | | | | | | | | | | | |
| Electric Pumps (speed based on 50 Hz) | 51,3 | 6,4 | 23,0 | 2,9 | 16,4 | 2,1 | 10,0 | 1,3 | 7,9 | 1,0 | 4,7 | 0,6 | 3,2 | 0,4 | 2,5 | 0,3 | XC Cordless Pump | 82 |
| | 86 | 8,3 | 38 | 3,7 | 27 | 2,6 | 17 | 1,6 | 13 | 1,3 | 7,7 | 0,7 | 5,4 | 0,5 | 4,1 | 0,4 | PU Economy | 84 |
| | 53 | 7,1 | 24 | 3,2 | 17 | 2,2 | 10 | 1,4 | 8,1 | 1,1 | 4,8 | 0,6 | 3,3 | 0,4 | 2,6 | 0,3 | PE Submerged | 86 |
| | 295 | 25,6 | 132 | 11,5 | 94,4 | 8,2 | 57,7 | 5,0 | 45,5 | 4,0 | 26,9 | 2,3 | 18,7 | 1,6 | 14,4 | 1,3 | ZU4-Series | 90, 92 |
| | 15,1 | 14,1 | 6,8 | 6,3 | 4,8 | 4,5 | 3,0 | 2,8 | 2,3 | 2,2 | 1,4 | 1,3 | 1,0 | 0,9 | 0,7 | 0,7 | ZE3 one stage | 90, 98 |
| | 158 | 14,1 | 70,7 | 6,3 | 50,5 | 4,5 | 30,9 | 2,8 | 24,3 | 2,2 | 14,4 | 1,3 | 10,0 | 0,9 | 7,7 | 0,7 | ZE3 two stage | 90, 98 |
| | 22,3 | 21,0 | 10,0 | 9,4 | 7,1 | 6,7 | 4,4 | 4,1 | 3,4 | 3,2 | 2,0 | 1,9 | 1,4 | 1,3 | 1,1 | 1,0 | ZE4 one stage | 90, 98 |
| | 228 | 21,0 | 102 | 9,4 | 72,9 | 6,7 | 44,6 | 4,1 | 35,2 | 3,2 | 20,8 | 1,9 | 14,4 | 1,3 | 11,1 | 1,0 | ZE4 two stage | 90, 98 |
| | 44,9 | 42,1 | 20,1 | 18,9 | 14,4 | 13,5 | 8,8 | 8,2 | 6,9 | 6,5 | 4,1 | 3,8 | 2,8 | 2,7 | 2,2 | 2,1 | ZE5 one stage | 90, 98 |
| | 298 | 42,1 | 133 | 18,9 | 95,3 | 13,5 | 58,3 | 8,2 | 46,0 | 6,5 | 27,2 | 3,8 | 18,9 | 2,7 | 14,5 | 2,1 | ZE5 two stage | 90, 98 |
| | 76,9 | 70,0 | 34,5 | 31,4 | 24,6 | 22,4 | 15,1 | 13,7 | 11,9 | 10,8 | 7,0 | 6,4 | 4,9 | 4,4 | 3,8 | 3,4 | ZE6 one stage | 90, 98 |
| | 315 | 70,0 | 141 | 31,4 | 101 | 22,4 | 61,7 | 13,7 | 48,7 | 10,8 | 28,8 | 6,4 | 20,0 | 4,4 | 15,4 | 3,4 | ZE6 two stage | 90, 98 |
| | 53,8 | 53,8 | 24,1 | 24,1 | 17,2 | 17,2 | 10,5 | 10,5 | 8,3 | 8,3 | 4,9 | 4,9 | 3,4 | 3,4 | 2,6 | 2,6 | SFP421 (11 kW) | 240 |
| Air Driven Pumps (at 6,9 bar air pressure) | 51,3 | 6,4 | 23,0 | 2,9 | 16,4 | 2,1 | 10,0 | 1,3 | 7,9 | 1,0 | 4,7 | 0,6 | 3,2 | 0,4 | 2,5 | 0,3 | XA-Series | 108 |
| | 25,9 | 4,2 | 11,6 | 1,9 | 8,2 | 1,3 | 5,0 | 0,8 | 4,0 | 0,6 | 2,3 | 0,4 | 1,6 | 0,3 | 1,3 | 0,2 | PATG-serie Turbo II Air | 106 |
| | 17 | 3,4 | 7,6 | 1,5 | 5,4 | 1,1 | 3,3 | 0,7 | 2,6 | 0,5 | 1,5 | 0,3 | 1,1 | 0,2 | 0,8 | 0,2 | PA-Series | 104 |
| | 277 | 3,8 | 123 | 1,7 | 88 | 1,2 | 53 | 0,7 | 42 | 0,6 | 25 | 0,3 | 17 | 0,2 | 13,0 | 0,2 | PAM-Series | 105 |
| | 357 | 33,6 | 160 | 15,1 | 114 | 10,8 | 69,9 | 6,6 | 55,1 | 5,2 | 32,6 | 3,1 | 22,6 | 2,1 | 17,4 | 1,6 | ZA-Series | 110 |
| Gasoline Engine | 295 | 41 | 132 | 18,4 | 94,4 | 13,1 | 57,7 | 8,0 | 45,5 | 6,3 | 26,9 | 3,7 | 18,7 | 2,6 | 14,4 | 2,0 | ZG5-Series 4,1 kW | 112 |
| | 166 | 41 | 74,7 | 18,4 | 53,4 | 13,1 | 32,6 | 8,0 | 25,7 | 6,3 | 15,2 | 3,7 | 10,6 | 2,6 | 8,1 | 2,0 | ZG5-Series 4,8 kW | 112 |
| | 376 | 85 | 169 | 37,9 | 121 | 27,1 | 73,8 | 16,6 | 58,2 | 13,1 | 34,4 | 7,7 | 23,9 | 5,4 | 18,4 | 4,1 | ZG6-Series 9,7 kW | 112 |

No Load indicates the plunger speed as the plunger extends towards the load (1st stage).

Load indicates the plunger speed as the load is lifted at a system pressure of 700 bar (2nd stage).

Example: At what speed (V) will the RC-256 (25 ton) cylinder move when powered by a ZE3-Series pump?
 RC-256 Cylinder Effective Area = 33,2 cm²
 ZE3-Series pump oil Flow (no load) = 6150 cm³/min

$$\text{Cylinder Plunger Speed (mm/sec)} = \frac{\text{Pump Oil Flow (cm}^3\text{/min)} \times 10}{\text{Cylinder Effective Area (cm}^2\text{)} \times 60}$$

$$\text{Speed V} = \frac{6150 \text{ cm}^3\text{/min} \times 10}{33,2 \times 60} = 30,9 \text{ mm/sec}$$



Ways

The (oil) ports on a valve.

A 3-way valve has 3 ports: pressure (P), tank (T), and cylinder (A).

A 4-way valve has 4 ports: pressure (P), tank (T), advance (A) and retract (B).

Single-Acting cylinders require at least a 3-way valve, and can, under certain instances, be operated with a 4-way valve.

Double-Acting cylinders require a 4-way valve, providing control of the flow to each cylinder port.

Positions

The number of control points a valve can provide. A 2-position valve has the ability to control only the advance or retraction of the cylinder. To be able to control the cylinder with a hold position, the valve requires a 3rd position.

Centre Configuration

The centre position of a valve is the position at which there is no movement required of the hydraulic component, whether a tool or cylinder.



The most common is the **Tandem**

Centre. This configuration provides for little to no movement of the cylinder and the unloading of the pump. This provides for minimum heat build-up.



The next most common is the **Closed**


Centre configuration, which is used mostly for independent control of multi-cylinder applications. This configuration again provides for little to no movement of the cylinder, but also dead-heads the pump, isolating it from the circuit.

Use of this type of valve may require some means of unloading the pump to prevent heat build-up.

There are many more type of valves, such as Open Centre and Float Centre. These valves are used mostly in complex hydraulic circuits and require other special considerations.




Open Centre




Float Centre

Directional Control Valves

3-Way Valves are used with single-acting cylinders.




4-Way Valves are used with double-acting cylinders.




Valves may be either pump mounted or remote mounted.

Pump Mounted




Remote Mounted




Valves may be either manually or solenoid operated.

Manually Operated




Solenoid Operated




Advance Hold Retract

Single-acting cylinder Controlled by a 3-way, 3-position valve.




cylinder plunger will extend.


Double-acting cylinder Controlled by a 4-way, 3-position valve.




cylinder port B to tank T.




A is closed: the cylinder plunger will maintain its position.



ports A and B are closed: the cylinder plunger will maintain position.






plunger will retract.






from cylinder port A to tank T: the cylinder plunger will retract.

Hexagon Nut and Bolt Sizes



| METRIC SIZES | | |
|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|
|  |  |  |
| Thread Size D (mm) | Hexagon Size S (mm) | Hexagon Size J (mm) |
| M 10 | 17 | 8 |
| M 12 | 19 | 10 |
| M 14 | 22 | 12 |
| M 16 | 24 | 14 |
| M 18 | 27 | 14 |
| M 20 | 30 | 17 |
| M 22 | 32 | 17 |
| M 24 | 36 | 19 |
| M 27 | 41 | 19 |
| M 30 | 46 | 22 |
| M 33 | 50 | 24 |
| M 36 | 55 | 27 |
| M 39 | 60 | 27 (30) |
| M 42 | 65 | 32 |
| M 45 | 70 | - |
| M 48 | 75 | 36 |
| M 52 | 80 | 36 |
| M 56 | 85 | 41 |
| M 60 | 90 | 46 |
| M 64 | 95 | 46 |
| M 68 | 100 | 50 |
| M 72 | 105 | 55 |
| M 76 | 110 | 60 |
| M 80 | 115 | 65 |
| M 85 | 120 | 70 |
| M 90 | 130 | 70 (75) |
| M 95 | 135 | - |
| M 100 | 145 | 85 |
| M 105 | 150 | - |
| M 110 | 155 | - |
| M 115 | 165 | - |
| M 120 | 170 | - |
| M 125 | 180 | - |
| M 130 | 185 | - |
| M 140 | 200 | - |
| M 150 | 210 | - |

| IMPERIAL SIZES | | |
|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|
|  |  |  |
| Thread Size D (inch) | Hexagon Size * S (inch) | Hexagon Size J (inch) |
| 5/8" | 1 1/16" | 1/2" |
| 3/4" | 1 1/4" | 5/8" |
| 7/8" | 1 7/16" | 3/4" |
| 1" | 1 5/8" | 3/4" |
| 1 1/8" | 1 13/16" | 7/8" |
| 1 1/4" | 2" | 7/8" |
| 1 3/8" | 2 3/16" | 1" |
| 1 1/2" | 2 3/8" | 1" |
| 1 5/8" | 2 9/16" | - |
| 1 3/4" | 2 3/4" | 1 1/4" |
| 1 7/8" | 2 15/16" | 1 3/8" |
| 2" | 3 1/8" | 1 5/8" |
| 2 1/4" | 3 1/2" | 1 3/4" |
| 2 1/2" | 3 7/8" | 1 7/8" |
| 2 3/4" | 4 1/4" | 2" |
| 3" | 4 5/8" | 2 1/4" |
| 3 1/4" | 5" | 2 1/4" |

* Heavy hexagon nuts.



Determine the maximum torque according to the bolt (nut) size and grade. Always consult the manufacturers instructions or engineering recommendations when making bolted connections.



IMPORTANT

The hexagon sizes shown in the tables should be used as a guide only. Individual sizes should be checked before specifying any equipment.



BSH-Series Heavy Duty Sockets

Use only Heavy Duty Impact Sockets for power driven torquing equipment, according to ISO2725 and ISO1174; DIN3129 and

DIN3121 or ASME-B107.2/1995.



Tightening Methods

Principally there are two modes of tightening: "Uncontrolled" and "Controlled".

Uncontrolled tightening

Uses equipment and/or procedures that cannot be measured. Preload is applied to a bolt and nut assembly using a hammer and spanner or other types of impact tools.

Controlled tightening

Employs calibrated and measurable equipment, follows prescribed procedures and is carried out by trained personnel.

Advantages of Controlled Tightening

Known, controllable and accurate bolt loads

Employs tooling with controllable outputs and adopts calculation to determine the required tool settings.

Uniformity of bolt loading

Especially important on gasketed joints as an even and consistent compression is required for the gasket to be effective.

Safe operation following prescribed procedures

Eliminates the dangerous activities of manual uncontrolled tightening and requires that the operators be skilled and follow procedures.

Reduces operational time resulting in increased productivity

Reduces tightening time and operator fatigue by replacing manual effort with the use of controlled tooling.

Reliable and repeatable results

Using calibrated, tested equipment, following procedures and employing skilled operators achieves known results consistently.

The right results first time

Many of the uncertainties surrounding in-service joint failures are removed by ensuring the correct assembly and tightening of the joint the first time.



Bolting Tools

For further information on Torque Tightening or other controlled tightening methods, please visit our website or ask for our **Bolting Tools Catalogue**.

Bolting Integrity Software

A comprehensive free on-line software solution for Bolted Joint Integrity.

Integral databases hold data for:

- BS1560, MSS SP44, API 6A and 17D flanged joints
- Common gasket materials and configurations
- Comprehensive range of bolt materials
- Comprehensive range of lubricants
- Enerpac's Controlled Bolting Equipment including: Torque Multipliers, Hydraulic Wrenches and Bolt Tensioning tools.

Custom Joint information can also be entered.

The software offers Tool selection, Bolt Load calculations and Tool pressure settings, as well as a combined Application data sheet and Joint completion report.

What is Torque?

It is a measure of how much force acting on an object causes that object to rotate.

What is Torque Tightening?

The application of preload to a fastener by the turning of the fastener's nut.

Torque Tightening and Preload


The amount of preload created when torqueing is largely dependant on the effects of friction.

Principally there are three different "torque components":


- torque to stretch the bolt
- torque to overcome the friction in bolt and nut threads
- torque to overcome friction at the nut spot face (bearing contact surface).

Torque Tightening

Turning movement

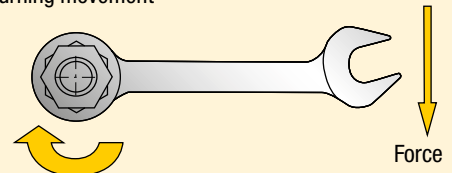

Stretch of Fastener (Pre-load)

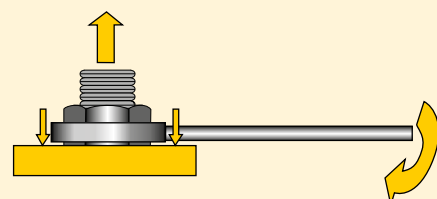





Preload (residual load) = Applied Torque *minus* Frictional Losses

Lubrication Reduces Friction

Lubrication reduces the friction during tightening, decreases bolt failure during installation and increases bolt service life. Variation in friction coefficients affect the amount of preload achieved at a specified torque. Higher friction results in less conversion of torque to preload. The value for the friction coefficient provided by the lubricant manufacturer must be known to accurately establish the required torque value.

Lubricant or anti-seize compounds should be applied to both, the nut bearing surface and the male threads.

Frictional Losses

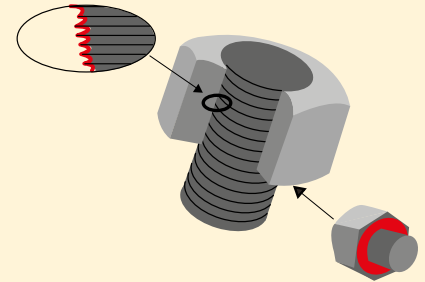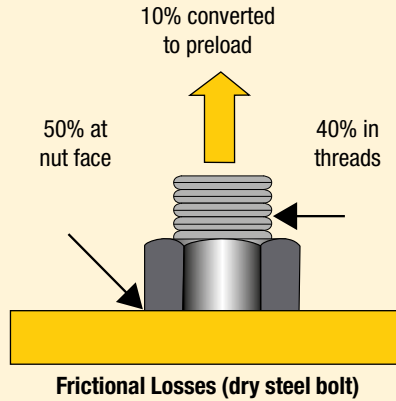

Friction points should always be lubricated when using the torque tightening method.



Select the Right Torque Wrench

Choose your Enerpac torque wrench using the untightening rule of thumb:

- When loosening a nut or bolt, more torque is usually required than when tightening.
- For general conditions it can take up to **2½ times** the input torque to breakout.
- Do not apply more than 75% of the maximum torque output of the tool when loosening nuts or bolts.

Conditions of bolted joints


- Humidity corrosion (rust) requires up to **twice** the torque required for tightening.
- Sea water and chemical corrosion requires up to **2½ times** the torque required for tightening.
- Heat corrosion requires up to **3 times** the torque required for tightening.

Torque Procedure

When torquing it is common to tighten only one bolt at a time, which can result in Point Loading and Load Scatter.

To avoid this, torque is applied in stages following a prescribed pattern:

Torque Sequence

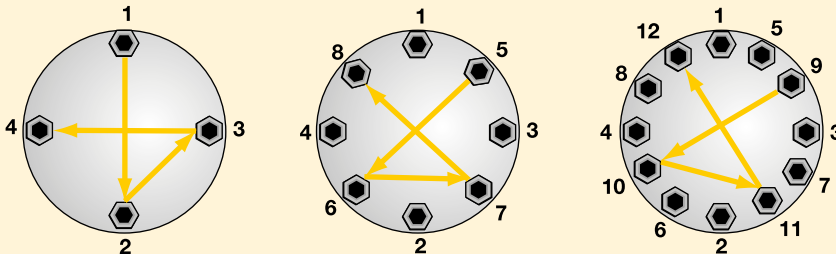

- Step 1** Spanner tight ensuring that 2 - 3 threads extend above nut.
- Step 2** Tighten each bolt to one-third of the final required torque following the pattern as shown above.
- Step 3** Increase the torque to two-thirds following the pattern shown above.

- Step 4** Increase the torque to full torque following the pattern shown above.
- Step 5** Perform one final pass on each bolt working clockwise from bolt 1, at the full final torque.




Breakout Torque

When loosening bolts a torque value higher than the tightening torque is normally required. This is mainly due to corrosion and deformations in the bolt and nut threads.

Breakout torque cannot be accurately calculated, however, depending on conditions it can take up to **2½ times** the input torque to breakout.

The use of penetrating oils or anti-seize products is always recommended when performing breakout operations.

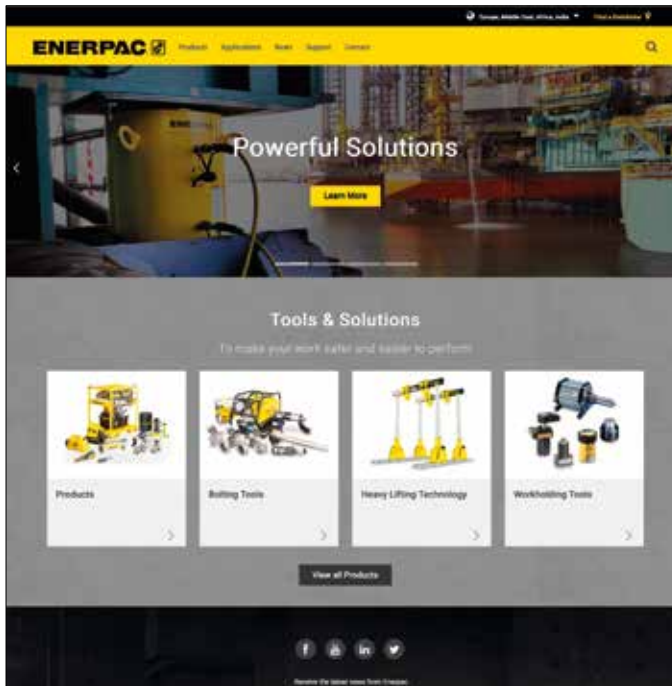

Enerpac is the leading global provider of high-pressure hydraulic tools and solutions with a broad range of products, local expertise and worldwide distribution network. With a proven track record in a wide range of markets, Enerpac designs and manufactures high-quality tools and solutions for all industrial applications.

Enerpac has gained unique experience in delivering hydraulic solutions for the controlled movement and positioning of heavy objects. Enerpac supports your business by offering the right solutions and service to help you get your work done efficiently and safely.

www.enerpac.com

- Learn more about hydraulics
- Promotions
- New products
- Electronic Catalogues
- Trade shows
- Manuals (instruction & repair sheets)
- Nearest Distributors & Service Centers
- Enerpac products in action
- Heavy Lifting Technology

Ordering Products and Catalogues

9508 Heavy Lifting Capability Brochure

Enerpac Heavy Lifting Technology provides solutions to meet customer requirements for safe, precise control of movement and positioning of heavy loads.

E414e, Bolting Tools Catalogue

Caters to the complete bolting workflow, ensuring joint integrity in a variety of applications throughout industry, including: joint assembly, controlled tightening and joint separation.

E215e Workholding Catalogue

Offers innovative products and solutions to provide powerful clamping and positioning force to every type of manufacturing process. Workholding solutions increase product quality and production output.

E414e



E215e



9508



While every care has been taken in the preparation of this catalogue and all data contained within is deemed accurate at the time of printing, Enerpac does reserve the right to make changes to the specifications of any product, or discontinue any product, contained within this catalogue without prior notice.

All illustrations, performance specifications, weights and dimensions reflect the nominal values and slight variations may occur due to manufacturing tolerances. Please consult Enerpac if final dimensions are critical.

All information in this catalogue can be changed due to product improvements without prior notice.

© Copyright 2018, Enerpac. All rights reserved. Any copying or other use of material in this catalogue (text, illustrations, drawings, photo's) without express written consent is prohibited.

Worldwide Catalogue Coverage

Enerpac Catalogues are printed in many languages. If your requirements call for product use in a different country, please send your request to the applicable country listed on page 280 or **enerpac.com**. The Enerpac catalogue of the country serving your specific market area will be forwarded promptly.



Enerpac Academy & EMP – Enerpac Maintenance Program



Do you work with high-pressure hydraulic tools regularly or even every day? Operating such tools requires sound knowledge of how they work and this should be maintained. Effective use of

these tools boosts safety and reduces risk - both for you as the operator and for the environment within which the tools are used. Having the right training will enable you to use the tools safely and properly.

Enerpac Academy is our in-house training centre, set up exclusively for Enerpac business partners, Enerpac users and Enerpac employees: training programs ranging from tool expertise, repairs and maintenance, to safe operation of high-pressure hydraulic tools.

Putting theory into practice

The training courses are interactive and benefit from a highly diverse program that puts the covered theory into practice right away. Our training services are grounded in many years of experience in providing and applying Enerpac tools.

Tailored training

Enerpac Academy offers you the exclusive opportunity to train your (new) employees in making proper use of Enerpac tools. Our trainings can also be done on-site.

Safety training: Safe use of Enerpac high pressure hydraulic tools, user and environmental safety.

Controlled bolting trainings: Bolting tool theory, tool applications, hands-on training on safe and efficient use of torque wrenches, tensioners and pumps.

General hydraulic sales training: Knowledge of hydraulics, hydraulic tools and applications.

Tool repair training: Repair and maintenance of general Enerpac tools.

Application training: Tool feature and benefits, tool application review, safe use of hydraulic tools and market information.



Enerpac Academy – The Power of Knowledge

- Specialist in-house Enerpac training center
- Standard and tailored training programs
- Highly experienced trainers
- Selection of training courses with a proven (value adding) track record
- Knowledge and experience sharing
- User and tool safety come first.

Training Centre Locations

- Ede (The Netherlands)
- Hosur, Tamil Nadu (India)
- Columbus, Wisconsin (USA)
- Sydney (Australia)
- Singapore

EMP – Enerpac Maintenance Program

EMP is a preventive maintenance program. Your Enerpac Authorized Service Centre will check the tools on essential points: leaking, oil level and quality, maximum pressure setting, and damage. EMP reduces operational risks, increases safety and minimises extremely expensive delays in your operations. You will be advised about regular maintenance of the Enerpac tools.

- Work more safely
- Minimise operational risk
- Ensure tools are always available and in tip-top shape
- As good as new after repair
- Prevent downtime
- Advice on safe and effective use
- Maintenance when tools are not used.

www.enerpac.com/en/enerpac-locations

Australia and New Zealand

Actuant Australia Ltd.
P.O. Box 6867, Wetherill Park, NSW 1851
Block V Unit 3, Regents Park Estate
391 Park Road, Regents Park NSW 2143
Australia
Tel: +61 287 177 200
Fax: +61 297 438 648

Brazil

Power Packer do Brasil Ltda.
Rua Luiz Merenda, 489
09930-760 - Diadema (SP)-Brasil
T +55 11 5687 2211
Toll Free: 0800 891 5770

China (Taicang)

Actuant (China) Industries Co.Ltd.
No. 6 Nanjing East Road,
Taicang Economic Dep Zone
Jiangsu, China
T +86 0512 5328 7500
F +86 0512 5335 9690
Toll Free:
T +86 400 885 0369

Enerpac Heavy Lifting Technology B.V.

Zuidelijke Havenweg 3, 7554 RR Hengelo
P.O. Box 421, 7550 AK Hengelo
The Netherlands
T +31 74 242 20 45
F +31 74 243 03 38

France, Switzerland, North Africa and French speaking African countries

ENERPAC
Une division d'ACTUANT France S.A.S.
Zone Orlytech, Bâtiment 516,
1 allée du commandant Mouchotte CS 40351
91550 Paray-Vieille-Poste, France
T +33 1 60 13 68 68
F +33 1 69 20 37 50

Germany and Austria, Central and Eastern Europe, Baltic States, Greece, Turkey and CIS countries

Actuant GmbH
P.O. Box 300113, D-40401 Düsseldorf
Willstätterstrasse 13, D-40549 Düsseldorf
Germany
T +49 211 471 490
F +49 211 471 49 28

India

Actuant India Private Limited
No. 10, Bellary Road, Sadashivanagar,
Bangalore, Karnataka - 560 080 India
T +91 80 3928 9000

Italy

ENERPAC S.p.A.
Via Leonardo da Vinci, 97
20090 Trezzano sul Naviglio (Milano)
T +39 02 4861 111
F +39 02 4860 1288

Japan

Enerpac Co., Ltd.
Besshocho 85-7
Kita-ku, Saitama-shi 331-0821, Japan
T +81 48 662 4911
F +81 48 662 4955

Middle East, Egypt and Libya

ENERPAC Middle East FZE
Plot M00737m 1242nd Street
Jebel Ali Free Zone North
P.O. Box 18004, Dubai
United Arab Emirates
T +971 (0)4 8872686
F +971 (0)4 8872687

Norway

Sales Office Norway
Unit 546, Nydalsveien 28, 0484 Oslo
P.O. Box 4814, Nydalen 0422 Oslo
Norway
Tel: +47 91 578 300

Russia

Rep. office Enerpac
Russian Federation
Admirala Makarova Street 8
125212 Moscow, Russia
T +7 495 98090 91
F +7 495 98090 92

Southeast Asia, Hong Kong and Taiwan

Actuant Asia Pte Ltd.
83 Joo Koon Circle,
Singapore 629109
T +65 68 63 0611
F +65 64 84 5669
Toll Free:
T +1800 363 7722

South Korea

Actuant Korea Ltd.
3Ba 717, Shihwa Industrial Complex
Jungwang-Dong, Shihung-Shi
Kyunggi-Do
Republic of Korea 429-450
T +82 31 434 4506
F +82 31 434 4507

Spain and Portugal

ENERPAC SPAIN, S.L.
Avenida Valdelaparra N° 27 3ª - L8
28108 Alcobendas (Madrid), Spain
T +34 91 884 86 06
F +34 91 884 86 11

South Africa and other English speaking African countries

ENERPAC AFRICA (PTY) Ltd.
Cambridge Office Park, Block E
5 Bauhinia Avenue
Highveld Techno Park, Centurion 0157
Republic of South-Africa
T 0027 (0) 12 940 0656

Sweden, Denmark, Finland and Iceland

Enerpac Scandinavia AB
Box 83
82222 Alfta, Sweden
Tel: +46 (0) 415 000

The Netherlands, Belgium, Luxembourg

ENERPAC B.V.
Galvanistraat 115, 6716 AE Ede
P.O. Box 8097, 6710 AB Ede
The Netherlands
T +31 318 535 911
F +31 318 535 848

United Kingdom and Ireland

ENERPAC Ltd.
5 Coopies Field
Morpeth, Northumberland
NE61 6JR, England
T +44 1670 5016 50
F +44 1670 5016 51

USA, Latin America and Caribbean

ENERPAC World Headquarters
P.O. Box 3241
Milwaukee, WI 53201-3241 USA
N86 W12500 Westbrook Crossing
Menomonee Falls, Wisconsin 53051
T +1 262 293 1600
F +1 262 293 7036
User inquiries:
+1 800 433 2766
Distributor inquiries/orders:
+1 800 558 0530
+1 800 628 0490

Model Number Index

Section Index

Page(s) ▼ Page(s) ▼ Page(s) ▼ Page(s) ▼

| | |
|-----------------------|-------------------------|
| A | EMB 174 |
| A5-A10 166 | EP 154-157 |
| A12 10 | EPH 158-161 |
| A13-A28 166 | EPP 155-157 |
| A29-A53 10 | EPX 157 |
| A64-A66 126 | ER-ES 174-175 |
| A92 166, 177 | ETW 208-210 |
| A102 10, 37 | EVO 242-245 |
| A128-A192 166 | F |
| A183 144 | F 124-125 |
| A185 144, 166 | FF 236-237 |
| A200R 146 | FH 124-125 |
| A205-A220 144 | FR 124-125 |
| A218-A305 166 | FRL 207 |
| A252 10, 37 | FS 232 |
| A310, A330 144 | FSB 172, 233 |
| A530-A595 166 | FSH 233 |
| A604 124-125 | FSM 233 |
| A607 166 | FZ 127 |
| A630 124-125 | G |
| A650 166 | G 130-131 |
| AH 124-125 | GA 134-135 |
| AM 126, 134 | GBJ 63 |
| AR 124-125 | GF 128-129 |
| ATM 234-235 | GP 128-129 |
| ATP 228 | H |
| AW 10 | H 122-123, 131 |
| B | HA 123 |
| B 227 | HB 123 |
| BAD 35 | HC 123 |
| BFZ 127 | HCG 40-47 |
| BH 227 | HCL 40-43, 52-55 |
| BHP 150-153 | HCR 40-43, 48-51 |
| BLS 246-247 | HCRL 40-42, 56-57 |
| BLT 210 | HF 126 |
| BPR 142-143 | HP 31, 33 |
| BR 227 | HSK 258-259 |
| BRC 28-29 | HSL 250-251 |
| BRD 34-35 | HT 227 |
| BRP 28-29 | I |
| BSA 129, 131 | IPL 146 |
| BSH 190 | J |
| BSS 146 | JBI 10 |
| BW 229 | JH 62 |
| BZ 180-181 | JHA 62 |
| C | JS 248-249 |
| C 124-125 | L |
| CAT 10, 23 | LH 147, 258-259 |
| CATG 37, 53, 55 | LPL 26-27, 40-41 |
| CATG 13, 15, 19 | LW 172 |
| 45, 47, 49, 53 | M |
| CD-CF-CH 125 | MBL 256-257 |
| CM 176 | MP 78 |
| CMF 125 | MS 164-167 |
| CR 124-125 | MSP 169 |
| CU 24-25 | MZ 164-167 |
| CW 166 | N |
| D | NC 229 |
| DGR 133 | NS 230-231 |
| DSA 210 | NV 135 |
| E | |
| E 184-185 | |
| ED 210 | |
| ELP 174-175 | |

| | |
|---------------------|--------------------------|
| P | T |
| P 72-79 | T 125, 132 |
| P142AL 60 | TH 125 |
| P392AL 60 | THC 212-213, 219 |
| P392FP 79 | 221-222, 224 |
| PA 104-107 | THQ 212-214, 219 |
| PAM 105 | 221-222, 224 |
| PAMG 106-107 | TM 147 |
| PATG 106-107 | TSP 186, 189 |
| PARG 106-107 | 192, 205 |
| PC 72, 74 | TQ 212, 214-215 |
| PE 86-89 | V |
| PF25 100 | V 60, 135-137 |
| PL 66-67 | VA2 105 |
| PM 212-213 | VB 141, 146 |
| PR 64-65 | VC 118-119 |
| PTW 206-207 | VE 116-119 |
| PU 84-85 | VHJ 146 |
| R | VLP 140-141 |
| RA 11 | VM 116-119 |
| RAC 12-13 | VMC 117-119 |
| RACH 16-17 | W |
| RACL 14-15 | W 192-203 |
| RAR 18-19 | WCB 178-179 |
| RAT 210 | WCR 204 |
| RB 10 | WHC 178 |
| RC 6-9, 58-61 | WHR 178 |
| RCH 30-31 | WMC 179 |
| RCS 22-23 | WR 167, 177 |
| 58, 61 | WRP 205 |
| RE 10 | WTE 205 |
| RFL 105-109 | X |
| RR 36-39 | XA 61 |
| RRH 32-33 | 108-109, 231 |
| RSM 22-23, 61 | XC 61, 82-83, 231 |
| RT 20-21 | XLK 108 |
| RTE 189 | XLP 140-141 |
| RWH 150 | XPG 108 |
| S | XSC 82, 108, 127 |
| S 186-189 | Z |
| SB 172, 233 | Z 125 |
| SBL 256-257 | ZA4 91, 110-111 |
| SBZ 94, 100 | ZA4T 91, 212 |
| 218, 224 | 222-225 |
| SC 58-59, 61 | ZCF 94-95 |
| SDA 188 | 100-101 |
| SFP 240-241 | ZCP 101 |
| SHAS 254-255 | ZE 91, 98-103 |
| SHS 252-253 | 212, 220-221 |
| SL 256-257 | ZG 112-113 |
| SLR 210 | ZHE 95, 101, 218 |
| SOH 173 | ZLS 94-95, 100-101 |
| SP 168-171 | ZPF 94-95, 100-101 |
| SPD 169 | ZU4 91-97 |
| SPK 168 | ZU4T 91, 212 |
| SPMT 260 | 216-219 |
| SRA 210 | ZUTP 226-227 |
| SRS 61, 189 | ZR 94-95 |
| STB 180-181 | 100-101, 224 |
| STC 178 | 5 |
| STF 232-233 | 11 - 45 80-81 |
| STN 229 | 72 - 83 80-81 |
| STP 169 | |
| SWH 186, | |
| 192, 202 | |
| SWR 61 | |

Cylinders & Lifting Products



Page 4-69

Pumps & Directional Control Valves



Page 70-119

System Components & Control Valves



Page 120-137

Presses



Page 138-147

Pullers



Page 148-161

Tools



Page 162-181

Bolting Tools



Page 182-237

Heavy Lifting Technology



Page 238-262



Cylinders & Lifting Products

Page 4-69



Pumps & Directional Control Valves

Page 70-119



System Components & Control Valves

Page 120-137



Presses

Page 138-147



Pullers

Page 148-161



Tools

Page 162-181



Bolting Tools

Page 182-237



Heavy Lifting Technology

Page 238-262

Australia and New Zealand
Actuant Australia Ltd.
T +61 287 177 200 – F +61 297 438 648

Brazil
Power Packer do Brasil Ltda.
T +55 11 5687 2211
Toll Free: 0800 891 5770

China
Actuant (China) Industries Co.Ltd.
T +86 0512 5328 7500
F +86 0512 5335 9690
Toll Free: T +86 400 885 0369

Enerpac Heavy Lifting Technology B.V.
T +31 74 242 20 45 – F +31 74 243 03 38

France, Switzerland, North Africa and French speaking African countries
ENERPAC, Une division d'ACTUANT France S.A.S.
T +33 1 60 13 68 68 – F +33 1 69 20 37 50

Germany and Austria, Central and Eastern Europe, Baltic States, Greece, Turkey and CIS countries
Actuant GmbH
T +49 211 471 490 – F +49 211 471 49 28

India
Actuant India Private Limited
T +91 80 3928 9000

Italy
ENERPAC S.p.A.
T +39 02 4861 111 – F +39 02 4860 1288

Japan
Enerpac Co., Ltd.
T +81 48 662 4911 – F +81 48 662 4955

Middle East, Egypt and Libya
ENERPAC Middle East FZE
T +971 4 8872686 – F +971 4 8872687

Norway
Tel: +47 91 578 300

Russia
Rep. office Enerpac
T +7 495 98090 91 – F +7 495 98090 92

Southeast Asia, Hong Kong and Taiwan
Actuant Asia Pte Ltd.
T +65 68 63 0611 – F +65 64 84 5669
Toll Free: T +1800 363 7722

South Korea
Actuant Korea Ltd.
T +82 31 434 4506 – F +82 31 434 4507

Spain and Portugal
ENERPAC SPAIN, S.L.
T +34 91 884 86 06 – F +34 91 884 86 11

Sweden, Denmark, Finland and Iceland
Enerpac Scandinavia AB
Tel: +47 91 578 300

The Netherlands, Belgium, Luxembourg
ENERPAC B.V.
T +31 318 535 911 – F +31 318 535 848

South Africa and other English speaking African countries
ENERPAC AFRICA (PTY) Ltd.
T 0027 (0) 12 940 0656

United Kingdom and Ireland
ENERPAC Ltd.
T +44 1670 5016 50 – F +44 1670 5016 51

USA, Latin America and Caribbean
ENERPAC
T +1 262 293 1600 – F +1 262 293 7036

User inquiries: +1 800 433 2766
Distributor inquiries/orders:
T +1 800 558 0530 – F +1 800 628 0490

ENERPAC®

POWERFUL SOLUTIONS. GLOBAL FORCE.