


Side Cutters / End Cutting Nippers

8313
SIDE CUTTER

for plastic

- > Without cutting edge bevel, for flush cutting of plastic parts or similar soft materials
- > Black, cutting faces flat-ground, with compression spring for automatic opening
- > With blue dipped non-slip handles (TL)

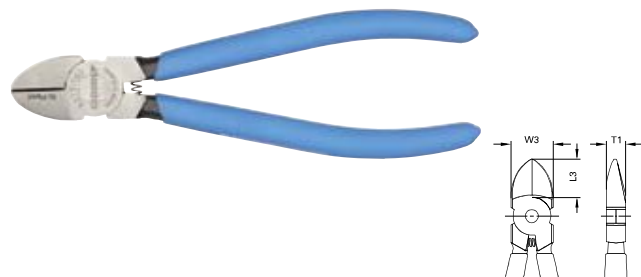

L	L ₂	W ₃	T ₁		Code	No.
125	16.0	17.0	8.5	0.116	6745910	8313-125 TL
140	18.5	18.5	9.5	0.131	6746050	8313-140 TL
160	19.0	22.0	10.0	0.184	6746130	8313-160 TL

8314
SIDE CUTTER

Swedish pattern

- > Acc. to DIN ISO 5749
- > With slender head - ideal for confined spaces
- > Induction-hardened precision cutting edges, hardness 63 - 65 HRC
- > For medium-hard wire, 1.6 mm
- > GEDORE special hardened and tempered steel, drop-forged, oil-hardened and annealed

- > JC = chrome-plated, with 2-component handles
- > TL = steel-grey, with blue dipped non-slip handles



L	L ₂	W ₃	T ₁	Ø		Code	No.
125	16.0	17.0	8.5	1,6	0.146	6742300	8314-125 JC
125	16.0	17.0	8.5	1,6	0.107	6740870	8314-125 TL
140	18.5	18.5	9.5	1,6	0.176	6742730	8314-140 JC
140	18.5	18.5	9.5	1,6	0.129	6740950	8314-140 TL
160	19.0	22.0	10.0	1,6	0.230	6743380	8314-160 JC
160	19.0	22.0	10.0	1,6	0.173	6741090	8314-160 TL

8315
ELECTRICIANS' SIDE CUTTER

- > Double-function electricians' side cutters: for cutting and stripping wire
- > Stripping notches for single- and multi-core wire, 1.5 mm² and 2.5 mm² conductor cross-section
- > Induction-hardened precision cutting edges, hardness 61 - 63 HRC
- > GEDORE special hardened and tempered steel, drop-forged, oil-hardened and annealed
- > JC = chrome-plated, with 2-component handles



L	L ₂	W ₃	T ₁	mm ²		Code	No.
160	19	22	10	1,5 / 2,5	0.235	1396722	8315-160 JC

8314-180
POWER SIDE CUTTER

Swedish pattern

- > Convex handle shape for a high force build-up*
- > Acc. to DIN ISO 5749
- > With slender head - ideal for confined spaces
- > Induction-hardened precision cutting edges, hardness 63 - 65 HRC
- > For hard wire/piano wire
- > Max. cutting capacity Ø 1.6 - 2.0 mm
- > GEDORE special hardened and tempered steel, drop-forged, oil-hardened and annealed
- > JC = chrome-plated, with 2-component handles
- > TL = steel-grey, with blue dipped non-slip handles
- * Crowned surfaces/handles - i.e. which are hardly rounded - prevent unfavourable, punctual peak forces. As a result, the force is evenly spread across your hand.



L	L ₂	W ₃	T ₁	Ø		Code	No.
185	25.0	26.0	11.0	1,6	0.300	2910934	8314-180 JC
185	25.0	26.0	11.0	1,6	0.243	2910926	8314-180 TL



- > Power pliers: The effort required in using them is down 35 % on account of the pivot transferred to the front and the resulting lengthened lever.
- > High-grade 2-component handles with finger protection enable work to be done ergonomically and to the exclusion of tiredness

