


# 8316 POWER SIDE CUTTER


- > Acc. to DIN ISO 5749
- > Good lever action for easy cutting
- > For hard wire/piano wire
- > Max. cutting capacity  $\varnothing$  1.4 - 2.0 mm

- > GEDORE special hardened and tempered steel, drop-forged, oil-hardened and annealed
- > JC = chrome-plated, with 2-component handles
- > TL = steel-grey, with blue dipped non-slip handles

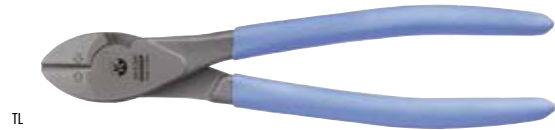

Inductively hardened cutting edges (63 - 65 HRC) ensure constant cutting power over a long time span.

Maximum cutting performance yet with a low level of effort expended thanks to an optimum interaction of cutting geometry, eccentric rivet bearing and ergonomic handle design.



## 8316 POWER SIDE CUTTER

American pattern



L	L <sub>3</sub>	W <sub>3</sub>	T <sub>1</sub>	Ø		Code	No.
<b>140</b>	17.0	22.0	9.5	1,4	0.175	6744190	8316-140 JC
<b>140</b>	17.0	22.0	9.5	1,4	0.146	6711930	8316-140 TL
<b>160</b>	19.0	24.5	10.0	1,6	0.236	6744510	8316-160 JC
<b>160</b>	19.0	24.5	10.0	1,6	0.195	6712070	8316-160 TL

L	L <sub>3</sub>	W <sub>3</sub>	T <sub>1</sub>	Ø		Code	No.
<b>180</b>	22.6	26.0	11.0	1,8	0.265	1439588	8316-180 JC
<b>180</b>	22.6	26.0	11.0	1,8	0.225	1439596	8316-180 TL
<b>200</b>	22.0	28.0	11.0	2,0	0.340	6745080	8316-200 JC
<b>200</b>	22.0	28.0	11.0	2,0	0.270	6712150	8316-200 TL

VDE 8316 / VDE 8316 H

>584



5 8303 JC

>422

