


VDE 2162-2172 PZ-06 VDE SCREWDRIVER SET SLIM DRIVE



6 pieces

- > Practical set composition in environmentally-friendly cardboard box
- > For slotted and cross-head screws PZ
- > Ultra-small blade diameter yet with full mechanical and electrical safety
- > No problems in reaching screws deeply embedded in screw shafts
- > VDE insulation up to 1000 V, acc. to EN 60900/IEC 60900, fully insulated blade
- > 3-component handles Power-Grip³ with hanging hole
- > Ergonomic handle design enables precise and fatigue-free working
- > Positive-fit joint of handle and blade for optimum transmission of force
- > Type of drive marked at end of the handle
- > Blade from GEDORE molybdenum-vanadium-Plus tempered steel

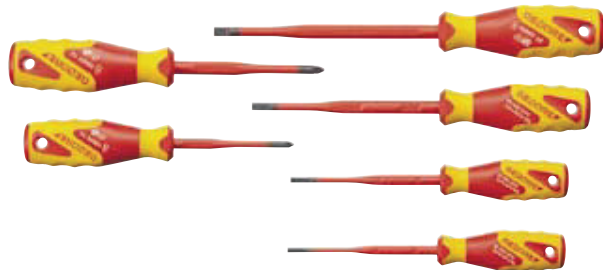

Contents		Code	No.
⊖ VDE 2172 3,5 4 5,5 6,5	0.590	2928728	VDE 2162-2172 PZ-06
⊕ VDE 2162 PZ 1 2			

VDE 2163 K VDE SCREWDRIVER



for in-hex screws, with ball end

- > Individually tested, VDE insulation up to 1000 V, acc. to EN 60900/IEC 60900, fully insulated blade
- > 3-component handles Power-Grip³ with hanging hole
- > Ergonomic handle design enables precise and fatigue-free working
- > Positive-fit joint of handle and blade for optimum transmission of force
- > Type of drive marked at end of the handle
- > Working angle approx. 25° in each direction
- > Blade from GEDORE molybdenum-vanadium-Plus tempered steel



mm	mm	mm		Code	No.
2,5	75	160	0.055	2824485	VDE 2163 K 2,5
3	75	160	0.055	2824493	VDE 2163 K 3
4	75	160	0.055	2824507	VDE 2163 K 4
5	75	175	0.100	2824515	VDE 2163 K 5
6	100	210	0.140	2824523	VDE 2163 K 6
8	100	220	0.222	2824531	VDE 2163 K 8

VDE 2164 VDE SCREWDRIVER SLIM DRIVE PLUSMINUS



Plus-Minus

- > Individually tested, VDE insulation up to 1000 V, acc. to EN 60900/IEC 60900, fully insulated blade
- > 3-component handles Power-Grip³ with hanging hole
- > Ergonomic handle design enables precise and fatigue-free working
- > Positive-fit joint of handle and blade for optimum transmission of force
- > Type of drive marked at end of the handle
- > Ultra-small blade diameter yet with full mechanical and electrical safety
- > No problems in reaching screws deeply embedded in screw shafts
- > Blade from GEDORE molybdenum-vanadium-Plus tempered steel



mm	mm		Code	No.
80	180	0.100	2824817	VDE 2164 SL/PH1
100	210	0.140	2824825	VDE 2164 SL/PH2

VDE 2163 TX VDE SCREWDRIVER



for recessed TORX[®] head screws

- > Individually tested, VDE insulation up to 1000 V, acc. to EN 60900/IEC 60900, fully insulated blade
- > 3-component handles Power-Grip³ with hanging hole
- > Ergonomic handle design enables precise and fatigue-free working
- > Positive-fit joint of handle and blade for optimum transmission of force
- > Type of drive marked at end of the handle
- > Blade from GEDORE molybdenum-vanadium-Plus tempered steel
- > TORX[®] = reg. trademark of Acument Intellectual Properties, LLC. USA



	mm	mm		Code	No.		
T5	M1,8	1,42	60	145	0.055	2824558	VDE 2163 TX T5
T6	M2	1,69	60	145	0.100	2824574	VDE 2163 TX T6
T7	M2,5	1,99	60	145	0.100	2824582	VDE 2163 TX T7
T8	M2,5	2,31	60	145	0.100	2824590	VDE 2163 TX T8
T9	M3	2,50	60	145	0.100	2824604	VDE 2163 TX T9
T10	M3 - M3,5	2,74	60	145	0.100	2824612	VDE 2163 TX T10
T15	M3,5 - M4	3,27	80	180	0.100	2824620	VDE 2163 TX T15
T20	M4 - M5	3,86	80	180	0.100	2824639	VDE 2163 TX T20
T25	M4,5 - M5	4,43	80	180	0.100	2824647	VDE 2163 TX T25
T27	M4,5 - M6	4,99	100	210	0.100	2824655	VDE 2163 TX T27
T30	M6 - M7	5,52	100	210	0.140	2824663	VDE 2163 TX T30
T40	M7 - M8	6,65	150	270	0.140	2824671	VDE 2163 TX T40
T45	M8 - M10	7,82	150	270	0.222	2824698	VDE 2163 TX T45