

**PLIERS NON-SPARKING**

**GED053**

PIPE WRENCH, AMERICAN PATTERN



Code	No.	"inch [E]"	"mm [E]"	↕ [E]
2517337	<b>GED0530230S</b>	3/4	230	600
2517329	<b>GED0530300S</b>	1	300	1125
2517310	<b>GED0530385S</b>	1.1/2	385	1370
2517302	<b>GED0530460S</b>	2	460	2450
2517299	<b>GED0530625S</b>	2.1/2	625	4050
2517280	<b>GED0530850S</b>	3.1/2	850	7350
2515849	<b>GED0531205S</b>	5	1205	13800



**GED055**

ADJUSTABLE SPANNER




Code	No.	mm [E]	"mm [E]"	↕ [E]
2507838	<b>GED0554000S</b>	38	240	420
2507811	<b>GED0555000S</b>	45	240	470
2507803	<b>GED0556000S</b>	48	290	780
2507781	<b>GED0557000S</b>	58	350	1000
2507773	<b>GED0558000S</b>	65	350	1200
2507765	<b>GED0559000S</b>	70	425	1600
2507854	<b>GED0551000S</b>	80	500	2200
2506181	<b>GED0551050S</b>	105	575	3700

**GED051**

ELBOW PIPE WRENCH

- ▶ For working in confined spaces
- ▶ Roller secured against loss

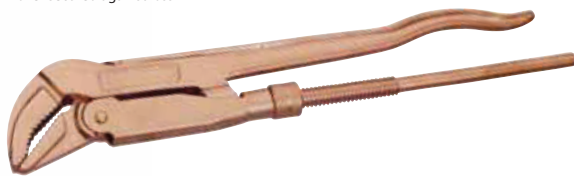


Code	No.	"inch [E]"	"mm [E]"	↕ [E]
2515156	<b>GED0510010C</b>	1	320	820
2513641	<b>GED0510015C</b>	1.1/2	430	1570
2515148	<b>GED0510020C</b>	2	540	3200
2515121	<b>GED0510030C</b>	3	700	4100
2515113	<b>GED0510040C</b>	4	790	6200

**GED051**

PIPE WRENCH, SWEDISH PATTERN

- ▶ Head angled 90°
- ▶ Roller secured against loss

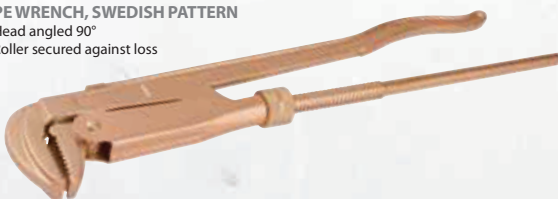

Code	No.	"inch [E]"	"mm [E]"	↕ [E]
2499118	<b>GED0510115C</b>	1.1/2	430	1570
2506203	<b>GED0510120C</b>	2	540	3200

**GED048**

ADJUSTABLE WRENCH



Code	No.	mm [E]	"mm [E]"	↕ [E]
2503174	<b>GED0481500C</b>	18	150	100
2503166	<b>GED0482000C</b>	26	200	200
2503158	<b>GED0482500C</b>	30	250	400
2503131	<b>GED0483000C</b>	36	300	700
2503123	<b>GED0483800C</b>	46	380	1400
2503115	<b>GED0484500C</b>	53	450	2700
2503107	<b>GED0486000C</b>	67	600	5100

**GED722**

CHAIN PIPE WRENCH light version

- ▶ Ideal for use in areas with restricted access
- ▶ Ratchet-type operation



Code	No.	for max. Ø	"mm [E]"	↕ [E]
2521687	<b>GED7220001S</b>	50	600	1700
2521679	<b>GED7220002S</b>	100	600	2500
2498677	<b>GED7220003S</b>	150	600	3000
2521660	<b>GED7220004S</b>	450	1600	8000

**GED052**

CHAIN PIPE WRENCH American pattern

- ▶ High efficiency due to maximum-possible lever action



Code	No.	for max. Ø	"mm [E]"	↕ [E]
2522748	<b>GED0520510S</b>	38	510	2650
2522721	<b>GED0520685S</b>	65	685	4500
2522705	<b>GED0520915S</b>	100	915	11500
2522691	<b>GED0521830S</b>	300	1830	30300

**GED065**

GAS PIPE PLIERS



Code	No.	Ø	"mm [E]"	↕ [E]
2510197	<b>GED0652100C</b>	40	210	370